



Beckington Parish Neighbourhood Plan Steering Group (NPSG)

Call for Sites Exercise

As part of the Neighbourhood Plan process, a Call for Sites exercise has been conducted by independent planning consultants Brodie Planning Associates to identify and assess sites for potential development if required. Assessments for 13 sites were provided to the NPSG on 24 January 2025 and were formally adopted by the Steering Group at its meeting on 10 February 2025.

The findings and recommendations in the assessments will now be considered by the Steering Group leading to a public consultation on preferred sites as part of the Neighbourhood Plan. They do not constitute a decision.

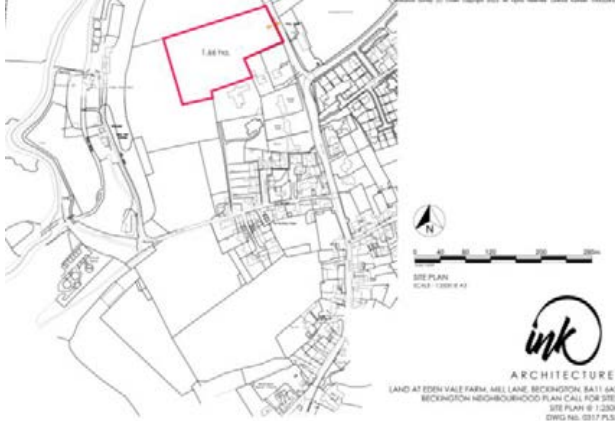

Further detail will be provided at the public Neighbourhood Plan Consultation to be held at 7.30pm on Monday 17 February 2025 at the Memorial Hall, Beckington.

Beckington Parish Neighbourhood Plan Steering Group 11 February 2025

Enclosures:

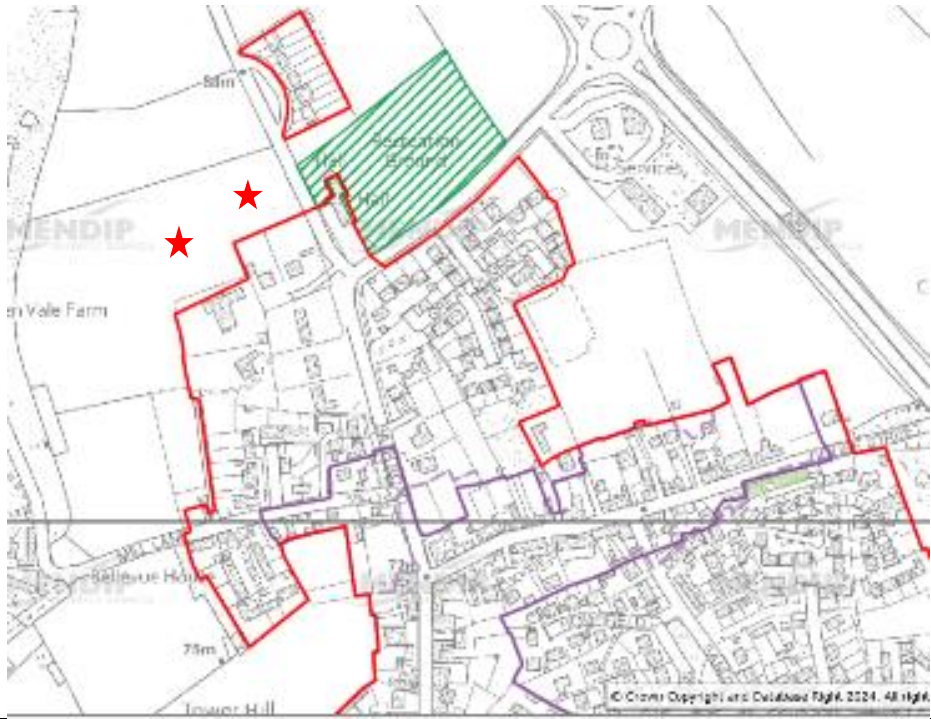
1	BNDP SA 2b	Land West of Bath Road
2	BNDP SA 2c	Land to the North of Mill Lane
3	BNDP SA 2d	Land to the South of Mill Lane
4	BNDP SA 2e	Land west of the Bath/Frome Road
5	BNDP SA 3a	Land off Bath Road
6	BNDP SA 3b	Land West of A36/A361 Roundabout
7	BNDP SA 3c	Land off Bath Road (comprising sites BNDP 3a and 3b)
8	BNDP SA 7	Land between Warminster Road and the A36
9	BNDP SA 36	Land North of Warminster Road
10	BNDP SA 82	Land at the Cedars
11	BNDP SA 84	Land South of Great Dunns Close
12	BNDP SA 85	Land South of Bath Road
13	BNDP SA 86	Land Rear of 24 Warminster Road
14	BPA 1002-02	Beckington Neighbourhood Development Plan – Call for future Housing Sites

Site Assessment Form

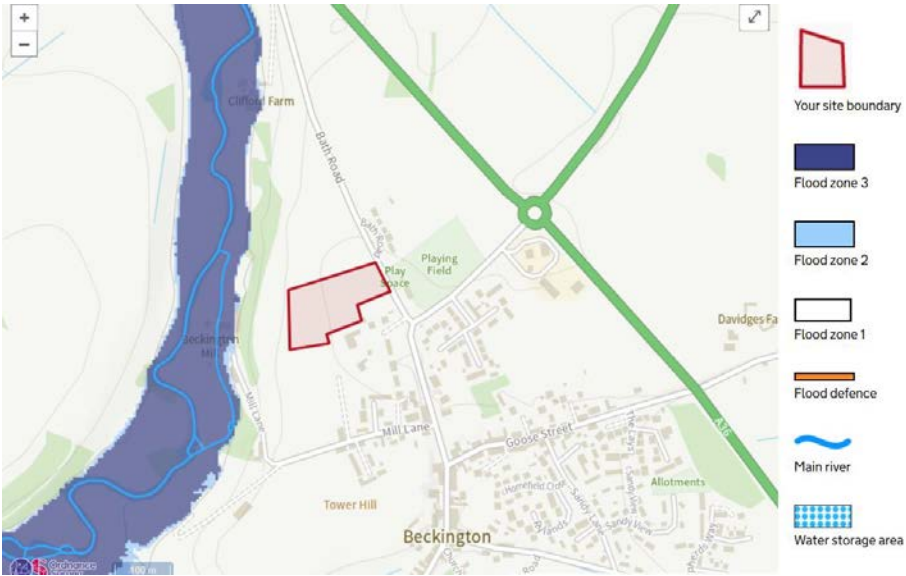
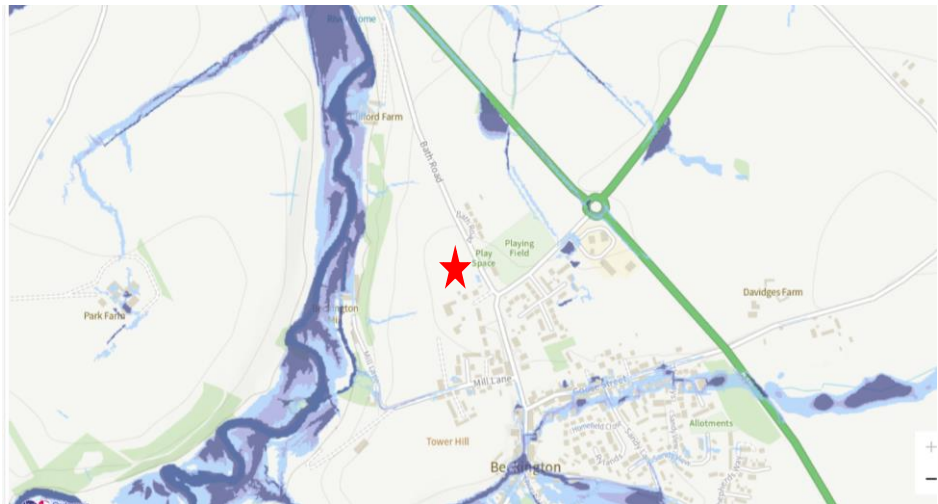
Completed by: WH (BPA)	
Date: 12/12/2024	
Site Name / Ref	BNDP_SA_2b_Land_West_of_Bath_Road
Site Address	Land west off Bath Road, Beckington, BA11 6SH
Site Area (hectares)	1.66ha
Description/ Overview     The site forms part of a larger grassland field currently used as pasture/grazing land. The submission documentation details land parcel site ref 2b forms part of a wider tract of land (including site ref 2c, 2d and 2e) used for dog exercise (classified as Sui Generis Use – approved under 2021/0868/FUL). The land is served off the Bath Road that runs adjacent to the eastern boundary via a field gate. The site adjoins the existing built form of the settlement along its southern boundary and the Bath Road with sporadic existing development along the eastern boundary. Open countryside wraps round the site boundaries to the north and west. A number of designated heritage assets adjoin the site on the southern boundary. The site is located on the edge of a river valley on exposed plateau.	

The site was submitted in the 2023 SHELAA under reference BECK005a.

Planning Policy Considerations

Settlement boundary	 The site (location marked with a red star/s throughout the following assessment) falls outside the defined development boundary. The development boundary adjoins the site along its southern boundary – denoted by red line in the above mapping extract.
Conservation Area	The site is located outside of the Beckington Conservation Area (approx. 200m south) – the boundary of the conservation area is shown by a purple line below. 
Landscape Designation or Character Area (please state)	The site lies within National Character Area 117 – Avon Vales and local Landscape Character Assessment (2020) Area B3: <i>Lower Frome Valley Spring Gardens, Beckington to Farleigh Hungerford</i>. Key physical/natural characteristics are defined as: Main river valley;

	Modest scale river and flood plain landscape; Areas of gently rolling plateau; and Limited woodland cover.
Nature Conservation Designation	Bat Consultation Zone Mells Valley SAC – Band B. Vallis Vale (SSSI) Impact Risk Zone.
Listed Buildings within site	N/A
Listed Buildings adjacent to site	There are three Listed Buildings immediately south of the site: 'Bountrol (No.23) and adjacent Garden Wall' (Grade II), 'Clifford House' (Grade II) and 'Coach House and Garden Wall adjacent to No. 21 (Clifford House)'. Mill Cottage a Grade II listed C17 cottage lies to the southwest along Mill Lane. 
Tree Preservation Order	No TPOs found on the MENDIP interactive mapping.

Flood Zone	The site lies within Flood Zone 1 which has a low risk from fluvial flooding (rivers and sea). 
Surface Water Flooding	The site as shown on in the classified mapping extract below has a low flood risk from surface water. 
Public Rights of Way	As shown in mapping below no PROW cross the site

	
Planning History	▪ <u>Change of Use of Agricultural Field to Sui Generis Use of field for exercising dogs.</u> Ref. No: 2021/0868/FUL Status: Approval ▪ <u>Approval of details reserved by condition 5 (Parking Area) on planning consent 2021/0868/FUL.</u> Ref. No: 2021/2416/APP Status: Approval ▪ <u>Application for a non-material amendment to permission 2021/0868/FUL for the change to operating hours to Monday to Saturday 9am to 5pm</u> Ref. No: 2021/2565/NMA Status: Approval Non-Material Amendment ▪ <u>Change of Use of Agricultural Field to Sui Generis Use of field for exercising dogs, construction of Agricultural Store, and Reception Building, including associated access and parking. (Resubmission of 2021/0868/FUL).</u> Ref. No: 2023/1369/FUL Status: Application Withdrawn ▪ <u>Application to vary condition 3 (Hours of Use) of planning approval 2021/0868/FUL (Change of Use of Agricultural Field to Sui Generis Use of field for exercising dogs.) to 8am - 6pm. (updated location plan)</u> Ref. No: 2023/1863/VRC Status: Application Withdrawn (notification of appeal has been received by LPA at the time of writing this assessment).

	LOCATION PLAN - EDEN VALE FARM, BECKINGTON 1:1250 © A4
Other designations affecting site (local plan)	Sewage works buffer Zone.
Agricultural Grade	See MAGIC mapping extract below: the site comprises classification Grade 3a agricultural land.



Site Appraisal

Access to Site



Access is served from Bath Road via an existing field gate. The submission documents indicate this access is proposed in any future development.

Topography	 The north easternmost part of the site adjacent to the Bath Road is relatively flat (plateau landscape area) for an extent before falling westward down to the River Frome (river valley).
Views into the site	The site area lies on an exposed landscape plateau on the edge of a river valley. Due to this distinct landform the site is prominent and highly visible in a range of views including important local views from Mill Lane and PROWs to the west. This is consistent with the SHELAA site assessment undertaken by the LPA. Established hedgerow along the eastern boundary limit views into the site from the Bath Road to the west and north. Views from the Bath Road are limited to the field gateway entrance. This view (looking westward from said field gateway) has been identified as an important view (ref no. 6) that should be protected in the emerging NDP. Should the site be considered further in the NDP process the LPA's landscape officer should be consulted.
Views out of the site	There are long range views to the north and west of the site. Views to the east and south are more enclosed/localised with a play area and existing residential development directly to the east and south.
Vegetation	An established hedgerow forms the eastern site boundary along the Bath Road. There are no notable trees on the site.
Hydrological features	N/A
Other on-site features	As noted in the 2023 SHELAA and evident on Google maps (imagery dated 2024) and confirmed

	by site visit (December 2024) there are telegraph poles and associated lines which runs along SE/E boundary/eastern corner to W boundary.
Signs of contamination?	Not evident. Current use of land as observed during the site visit (December 2024) is for grazing (sheep).
Current use of site	The submission documents suggest permission for dog walking has been implemented. This was not apparent from my site visit. The current use would appear to be agricultural pasture/grazing land with sheep grazing.
Any known previous use?	Agriculture
Utilities on site?	Unknown
Character of Area	Agriculture. Open countryside. Rural. River valley with undulating landscape plateau.
Neighbouring Land Uses	Existing residential development adjoining the site to the south and directly opposite to the east along with a children's outdoor playground and village hall. Agricultural fields forming open countryside wrapping round to the north and west.
Design Layout Issues	Development of the site area would result in the subdivision of the existing historical field pattern. Any built development on this site would be highly visible in wide ranging views; local, mid and long; due to the distinct landform: landscape plateau on edge of river valley. The site forms part of the foreground to this part of the settlement (western) which plays an important role in terms of its contribution to the rural character of this part of the settlement (westernmost). For this reason and in my opinion, design considerations would fail to overcome or suitably mitigate against the impact of development on the rural character of this part of the settlement. In the main, the built form of the settlement nestles discreetly in the undulating form of the plateau landscape. Any built development on this site would appear at odds with this prevailing characteristic and fail to protect local distinctiveness.

	Typically, an edge of settlement location would require soft transitional arrangements: density, form, scale, height, layout and landscaping. The significance of the site on the setting of the nearby listed buildings requires further consideration.
Height and character of surrounding buildings	The existing built environment (residential to the south and east, and village hall) in the vicinity of the site range from one to two storeys. Those properties adjacent to the southern boundary of the site vary in age and style. These include early 19th-century buildings and C20 dwellinghouses off Mill Lane and opposite (Bath Road). Given the proximity of the designated heritage assets to the south any development would require further consideration in terms of their setting.

Availability

Ownership	
Owner supportive of development?	Yes
Time frame in which site could be developed	Available immediately.

Development Potential

Is the site considered appropriate for development?	No.
Can the entire site be developed?	No.
Potential Development N/A	
Any known developer interest?	Understood to be under option to a developer (SHELAA 2023).

Suitability

Which category does this site fall into? Please give reasons for your choice (what are the problems if any)

1. Inappropriate – development would have a significant adverse impact on landscape, local distinctiveness, and the rural character of the settlement.

~~2. Significant constraints~~

~~3. Minor constraints~~

~~4. Unconstrained~~

Assessment conclusions

Site Available	Yes
Site Suitable	No
Site Achievable	No

Conclusion

Beckington is identified in the adopted Development Plan as a 'Primary Village' wherein "new development that is tailored to meet local needs will be provided for" (Core Policy 1: Mendip Spatial Strategy). Although the site lies outside of the defined development boundary, the southern site boundary adjoins the development boundary along this edge.

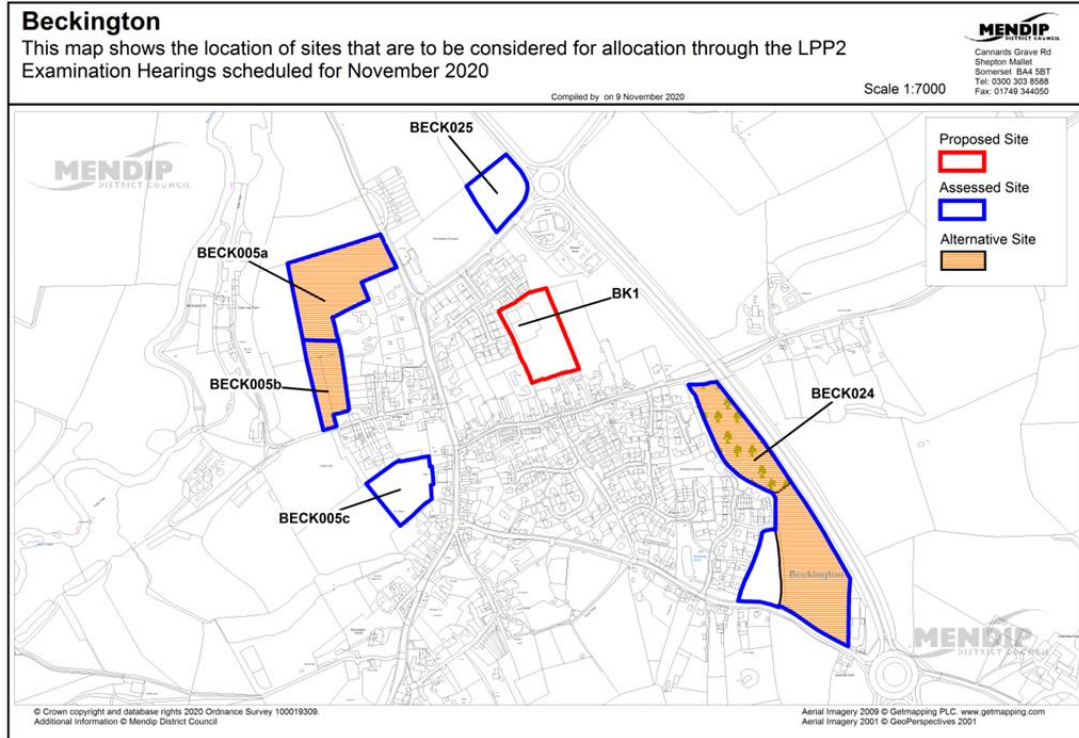
Any built development on this site would be highly visible in wide ranging views; local, mid and long distance; due to the distinct landform: edge of river valley, and prevailing characteristics of the settlement. Thus, the magnitude of change resulting from residential development (the CfS is undertaken to assess land for housing allocation in the emerging NDP) on the landscape and the rural character of the settlement is considered to be significantly adverse.

Views over the site have been identified as important and worthy of protection in the emerging NDP (ref View no. 6). Development would fundamentally alter the character of this land from undeveloped open countryside to urban built form.

For the above reasons the site is not recommended to be taken forward to the next stage.

Notwithstanding the above, given the known A36 and local drainage capacity issues, should this site be considered further in the NDP process the LLHA and LLFA must be consulted so they are able to provide comments.

Enclosures



Land at Tower Hill Farm, Beckington		BECK005a
Town/Parish: Beckington	Division: Frome North	Re-promoted
Site Description / Adjacent Land Uses Greenfield site (currently sheep grazing and dog walking park), adjacent to Bath Road, to the NW of Beckington. Surrounded by agriculture, residential and the memorial hall. Highway access proposed off Bath Road.		
		© Crown copyright and database rights 2023 Ordnance Survey 1000086132. Additional information © Somerset Council
Proposed Development Total site area - 1.31 Ha (all developable). Proposal: up to 24 dwellings starting 2024-2026.		
Policy Status and Policies Map Designations Adjacent to development limit. No other policy map designations.		
Planning History / SHLAA Status / Eligibility (for permissions) 2021/0868/FUL – application for dog walking park (approved). Included land at BECK005b and BECK005c. 2023/1369/FUL – alterations to above permission (withdrawn 19/09/2023). Included land at BECK005b and BECK005c.		
Flood Risk River flooding – Flood Zone 1. Surface water flooding – very low risk.		
Conservation Area / Listed Buildings / Areas of High Archaeological Potential Conservation Area: No Listed Buildings: Adjacent to site AHAP: No		
Designated Landscape No impact on AONB or Special Landscape Features. Landscape Character Area B3: Lower Frome Valley.		
Accessibility		
Corner shop/food shop	312	M&S Simply Food
Primary school (secondary school)	648	Beckington Church of England First School
GP Surgery	776	Beckington Family Practice
Bank/Post Office	2km	Rode Post Office
Community hub (pub/hall)	39	Beckington Memorial Hall
Open space (can be provided on site)	35	Beckington Playground
Employment cluster	1.5km	Frome Road, Rode
Bus stop	164	Bus Stop
Town centre/high order hub	5km	Frome

Settlement Strategy (CP1, CP2)		
3a	Status in adopted settlement hierarchy	Primary Village
	Housing delivery above min requirement	32% growth in stock / 205% above CP2 minimum
	Re-use of land (greenfield/brownfield)	Greenfield / BMV land
	Relationship to development limit	Adjoining development limit
Site Constraints and characteristics (DP1, DP8, DP21)		
5	Physical and infrastructure constraints	Some - telegraph poles
	Contamination and Ground Conditions	None
	Sewage Treatment Works Buffer Zone	Yes (part)
	Impact on Minerals and Waste Policies	None
Designated and Priority Habitats (DP5, DP6)		
C	RAMSAR Phosphate Mitigation Requirement	Outside catchment area
	Special Areas of Conservation (SAC)	Mells Valley Bats SAC - Band C
	SSSI - Sensitivity to Designated Habitats	Low risk
	Impact on Priority Habitats & Local Wildlife sites	Deciduous woodland 40m to NW
Heritage and Landscape (DP1, DP3, DP4)		
5	Impact on heritage assets	Listed building adjacent to site
	Impact on settlement character	Harm would be difficult to mitigate
	Impact on landscape character	Harm would be difficult to mitigate
Highways, Accessibility and Infrastructure		
5	Settlement connectivity	Frequent bus service, <5km from Frome
	Education Capacity	No short-term primary school capacity
	Lead Local Flood Authority High Level comments	Potential flooding issues - see Technical Appendix Part 3
	Highways Authority -High Level comments	NOP - but subject to cumulative impacts - see notes
	Cumulative development impacts near site	Highways impact on A36 roundabouts/flood risk
Deliverability		
5	Planning Status	None
	Conformity with LLP1/LPP2 policies/allocations	Outside but adjacent to DL
	Impact on neighbourhood plans/other plans	
	Ownership & Availability	Unknown
	Marketability	Under option to a developer
	Progress on Phosphate Mitigation Solution	Not applicable
	Impact on A36 Improvements - Policy DP27	Likely development delay or Nat Highways holding objection
Strategic or Local Risks to delivery		
Notes Physical and infrastructure constraints: telegraph pole runs along SE/E boundary/eastern corner to W boundary and runs through small part of site in south. Highways: Due to cumulative effects on A36 roundabouts, even smaller schemes may be subject to a TP requirement that may rule the site out. Policy DP27 financial contributions will apply. Constraint dependent on progress with Mitigation/Improvement Programme being addressed as part of SGV application - see FRO225a.		
Summary: Site is on the edge of a village that has delivered significantly in excess of CP2 requirements. It would impact settlement character, local distinctiveness and landscape character. It is BMV agricultural land. Education capacity is limited and drainage has been an issue for the village. Financial contributions would be required for the A36 roundabout. The site is not suitable for allocation.		

Figure 1: Proposed site layout plan



Site Assessment Form

Completed by: WH (BPA)	
Date: 02/12/2024	
Site Name / Ref	BNDP_2c_Land_North_of_Mill_Lane Land to the North of Mill Lane
Site Address	Land to the north of Mill Lane, Beckington, BA11 6SN
Site Area (hectares)	0.86ha
Description/ Overview	
	
The site forms part of a larger agricultural field currently used as pastureland. The submission documentation details land parcel site ref 2C forms part of a wider tract of land (including site ref 2b, 2d and 2e) used for dog exercise (classified as Sui Generis Use – approved under 2021/0868/FUL).	

The land is served off Mill Lane that runs adjacent to the southern boundary via a field gate.

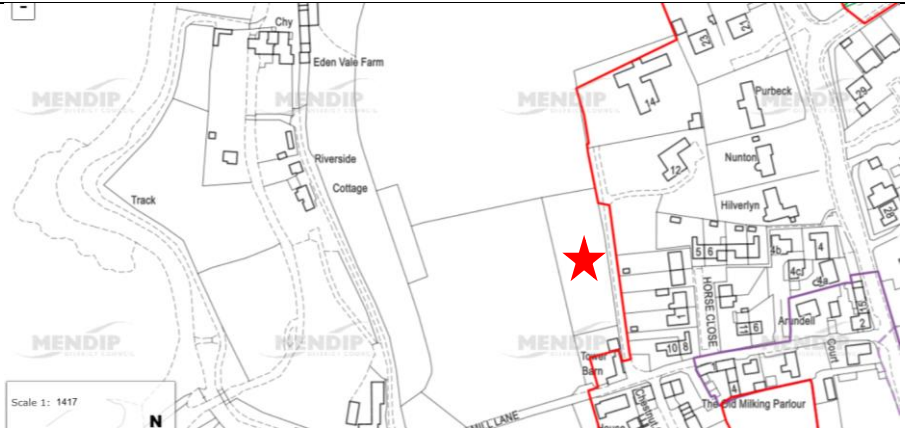
The site adjoins the existing built form of the settlement along its eastern boundary. Open countryside (agricultural pastureland) lies to the north, west and south.

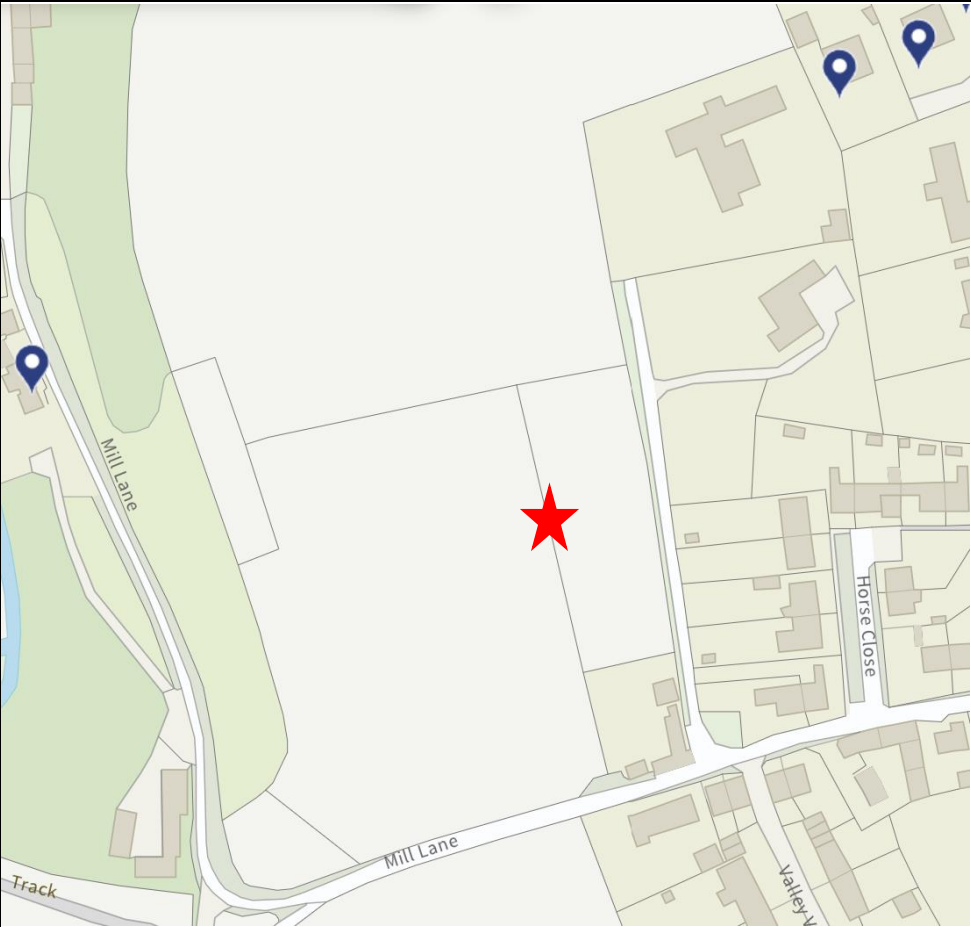
There are no designated assets within or immediately adjoining the site.

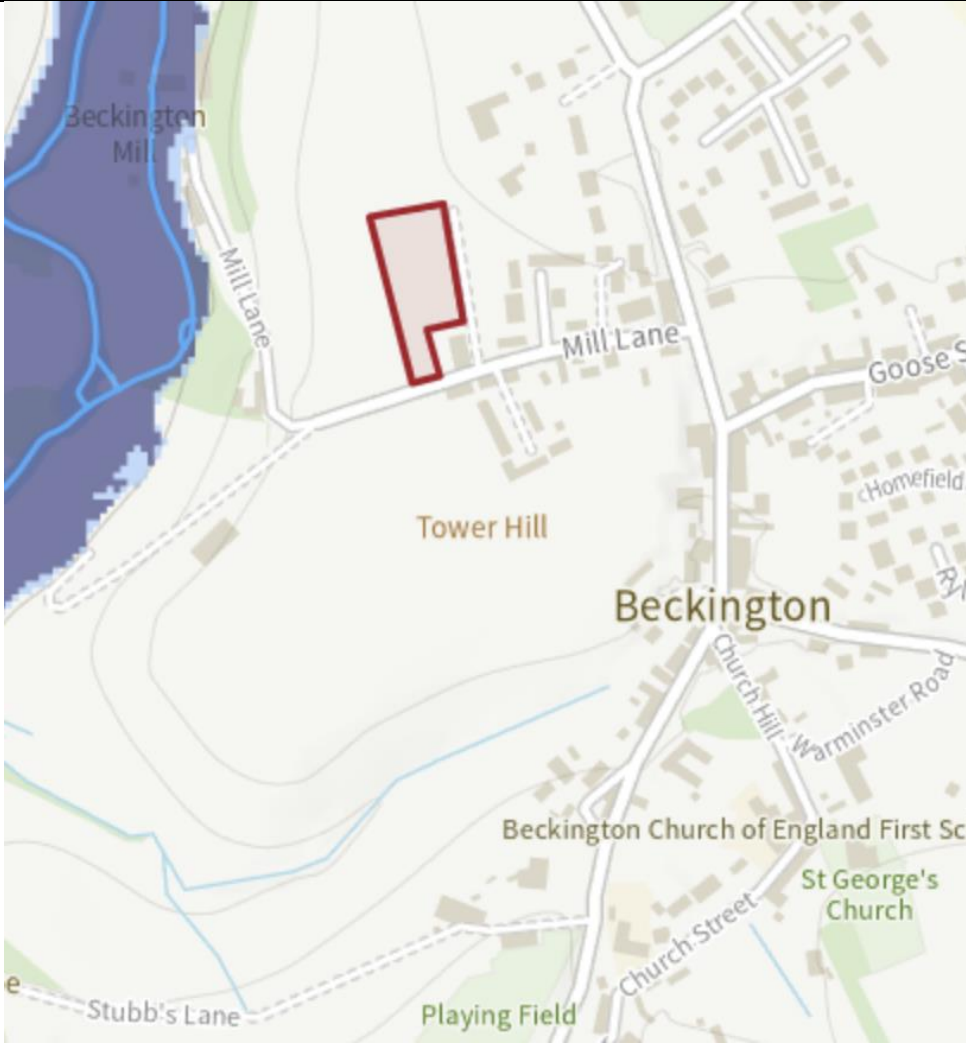
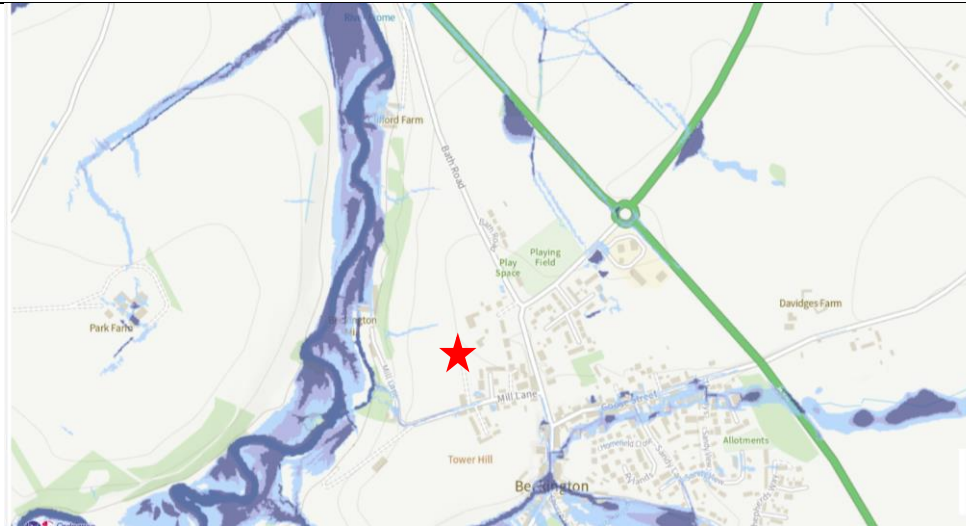
The site is located on the edge of a river valley on exposed plateau.

The site was submitted in the 2023 SHELAA as part of the site with the reference BECK005b.

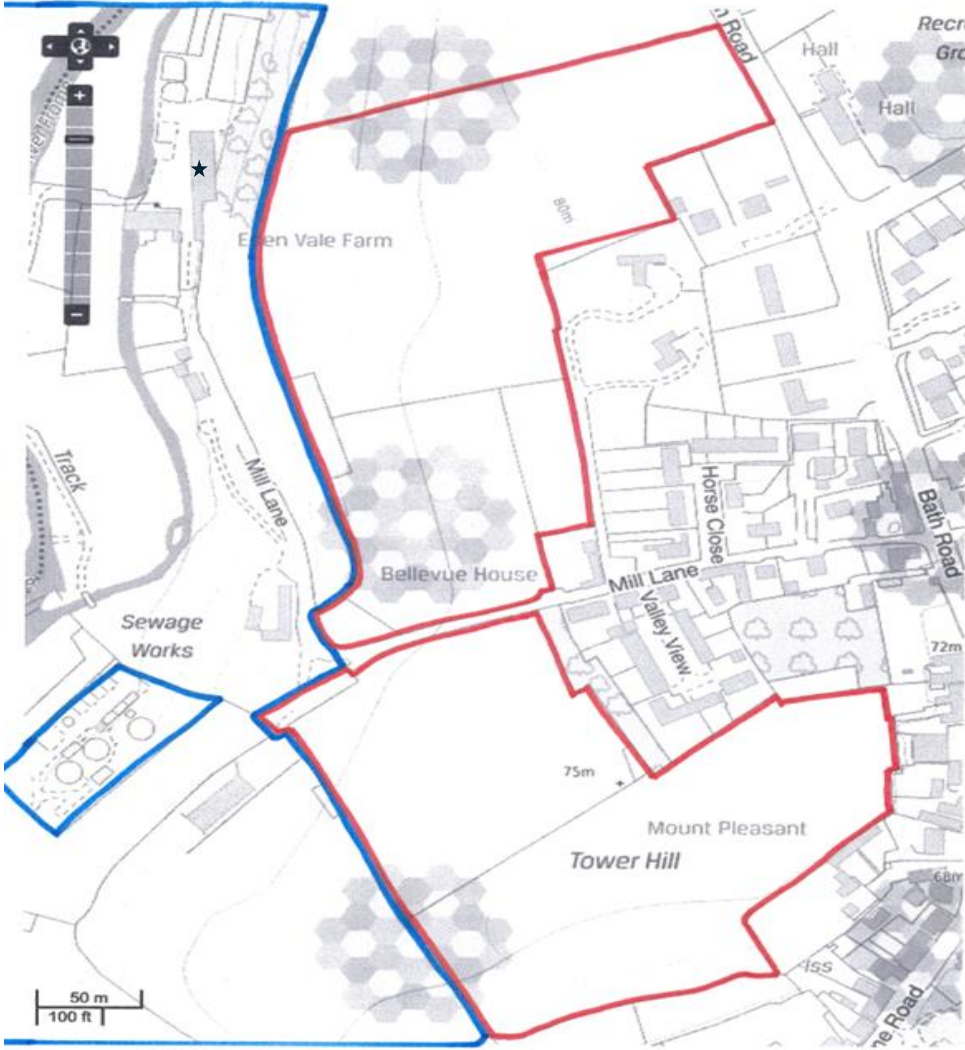
Planning Policy Considerations

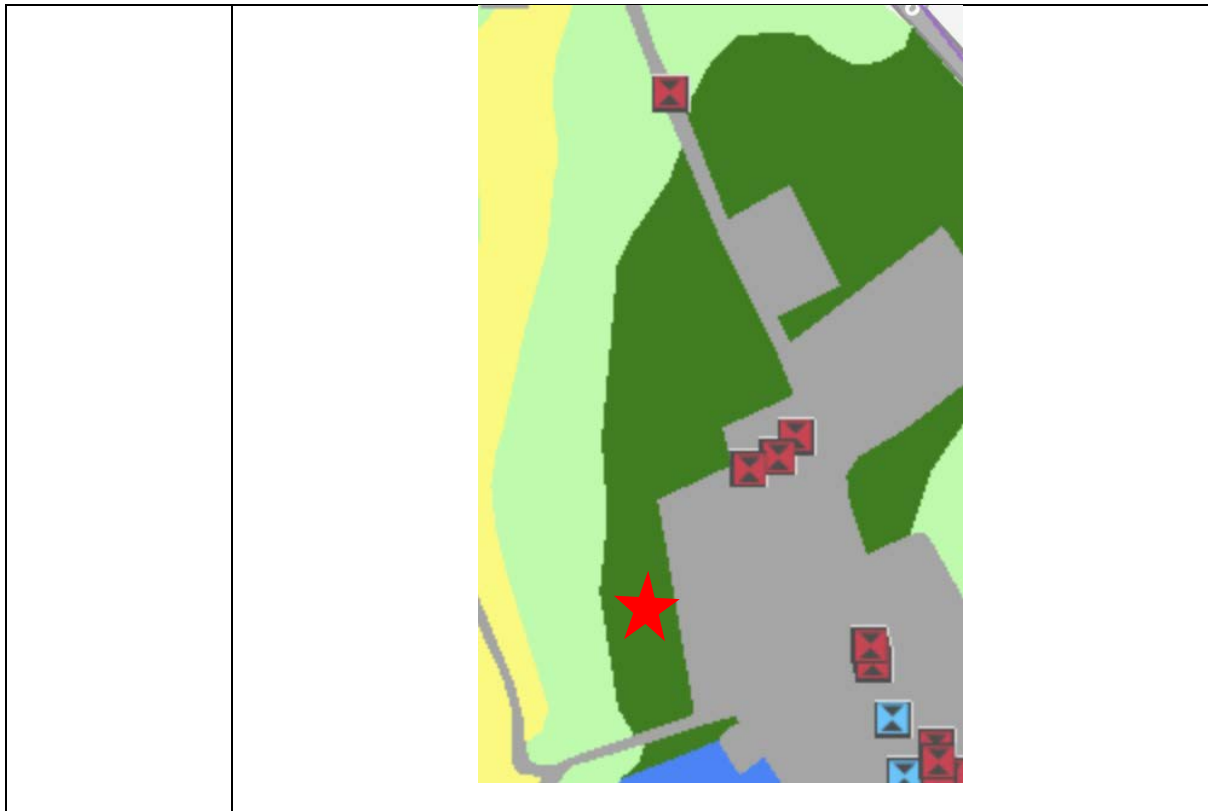
Settlement boundary	 The site (location marked with a red star/s throughout the following assessment) falls outside the defined development boundary. The development boundary adjoins the site along its eastern boundary – denoted by the red line in the above mapping extract.
Conservation Area	The site lies outside of the Beckington Conservation Area – the boundary of conservation area is shown by the purple line in the mapping extract below. 
Landscape Designation or landscape	The site lies within National Character Area 117 – Avon Vales and local Landscape Character Assessment (2020) Area B3: <i>Lower Frome Valley Spring Gardens, Beckington to Farleigh Hungerford</i>. Key

character (please state)	physical/natural characteristics are defined as: Main river valley; Modest scale river and flood plain landscape; Areas of gently rolling plateau; and Limited woodland cover.
Nature Conservation Designation	Bat Consultation Zone Mells Valley SAC – Band B. Vallis Vale (SSSI) Impact Risk Zone.
Listed Buildings within site	There are no listed buildings within the site.
Listed Buildings adjacent to site	 Mill Cottage a Grade II listed C17 cottage lies to the west along Mill Lane.
Tree Preservation Order	No TPOs found on the MENDIP interactive map.
Flood Zone	The site lies within Flood Zone 1 which has a low risk from fluvial flooding (rivers and sea) – as shown in EA Flood map for Planning extract below.

	
Surface Water Flooding	 The site is shown on classified mapping to be at low risk of surface water flooding. There is a scattered low to medium risk along Mill Lane forming the southern boundary.

Public Rights of Way	As shown in the Somerset interactive mapping extract below no PROW cross the site. However, the site is visually prominent in views from PROW footpath reference FR 1/3 to the southwest. 
Planning History	▪ Change of Use of Agricultural Field to Sui Generis Use of field for exercising dogs. Ref. No: 2021/0868/FUL Status: Approval ▪ Approval of details reserved by condition 5 (Parking Area) on planning consent 2021/0868/FUL. Ref. No: 2021/2416/APP Status: Approval ▪ Application for a non-material amendment to permission 2021/0868/FUL for the change to operating hours to Monday to Saturday 9am to 5pm Ref. No: 2021/2565/NMA Status: Approval Non-Material Amendment ▪ Change of Use of Agricultural Field to Sui Generis Use of field for exercising dogs, construction of Agricultural Store, and Reception Building, including associated access and parking. (Resubmission of 2021/0868/FUL). Ref. No: 2023/1369/FUL Status: Application Withdrawn ▪ Application to vary condition 3 (Hours of Use) of planning approval 2021/0868/FUL (Change of Use of Agricultural Field to Sui Generis Use of field for exercising dogs.) to 8am - 6pm. (updated location plan) Ref. No: 2023/1863/VRC Status: Withdrawn (notification of appeal has been received by the LPA at the time of writing).

	LOCATION PLAN - EDEN VALE FARM, BECKINGTON  1:1250 © A4
Other designations affecting site (local plan)	Sewage buffer zone
Agricultural Grade	As shown in MAGIC mapping extract below the site lies within land classification Grade 3a (denoted in dark green). For reference, light green denotes land grade classification 3b.



Site Appraisal

Access to Site	The submission documents details use of the existing field access for any future development and/or a link from Site 2B (see site assessment of 2B) to the Bath Road.
Topography	 The site lies on the landscape plateau of a river valley where the land is relatively flat rising gently northwards and eastwards with a steep fall to the River Frome to the west.

Views into the site	 The site area lies on an exposed landscape plateau on the edge of a river valley. Due to this distinct landform the site is prominent and highly visible in a range of views including important local views from Mill Lane and PROW to the west. The site is readily apparent from Mill Lane adjacent to the southern site boundary. This is consistent with the SHELAA site assessment undertaken by the LPA. Should the site be considered further in the NDP process the LPA's landscape officer should be consulted.
Views out of the site	There are local, mid and long-distance views to the north and west of the site. Local and mid-range views to the south. Views to the east are enclosed by existing residential development.
Vegetation	An established hedgerow runs a short extent along the southern boundary. There are no notable trees within the site itself. The existing western edge of the settlement (eastern site boundary) is defined by mature hedgerows and a number of established trees which lie adjacent to Mill Lane. This soft verdant edge creates a strong boundary to this part of the settlement.
Hydrological features	None on site.
Other on-site features	As noted in the 2023 SHELAA and evident on Google maps (imagery dated 2024) and confirmed by site visit (December 2024) there is a telegraph pole and associated lines to the south of the site area.
Signs of contamination?	Not evident
Current use of site	The submission documents state that planning permission for the use of land for dog walking has been implemented. This was not readily apparent

	from my site visit. The current use would appear to be agricultural pasture/grazing land.
Any known previous use?	Agriculture
Utilities on site?	Unknown
Character of Area	Agriculture. Open countryside. Rural. River valley with undulating landscape plateau.
Neighbouring Land Uses	Residential to the east. Agricultural fields forming open countryside that wraps round the site area to the north, west and south.
Design Layout Issues	Development of the site area would result in the subdivision of the existing historical field pattern. Any built development on this site would be highly visible in wide ranging views; local, mid and long; due to the distinct landform: landscape plateau on edge of river valley. The site forms part of the foreground to this part of the settlement (western) which plays an important role in terms of its contribution to the rural character of this part of the settlement (westernmost). For this reason and in my opinion, design considerations would fail to overcome or suitably mitigate against the impact of development on the rural character of this part of the settlement. In the main, the built form of the settlement nestles discreetly in the undulating form of the plateau landscape. Any built development on this site would appear at odds with this prevailing characteristic and fail to protect local distinctiveness. Typically, an edge of settlement location would require soft transitional arrangements: density, form, scale, height, layout and landscaping.
Height and character of surrounding buildings	Surrounding dwellings are predominantly two storeys in height with except of the single storey dwelling adjoining the site to the southeast.

Availability

Ownership	██████████
Owner supportive of development?	Yes

Time frame in which site could be developed	Immediately.
--	--------------

Development Potential

Is the site considered appropriate for development?	No.
Can the entire site be developed?	No
Potential Development N/A	
Any known developer interest?	Unknown.

Suitability

Which category does this site fall into? Please give reasons for your choice (what are the problems if any) 1. Inappropriate 2. Significant constraints 3. Minor constraints 4. Unconstrained
--

Assessment conclusions


Site Available	Yes
Site Suitable	No.
Site Achievable	No.
Conclusion Beckington is identified in the adopted Development Plan as a 'Primary Village' wherein "new development that is tailored to meet local needs will be provided for" (Core Policy 1: Mendip Spatial Strategy). Although the site lies outside of the defined development boundary, the eastern site boundary adjoins the development boundary along this edge. The submission was not accompanied by any type of landscape assessment such as a Landscape and Visual Impact Assessment (LVIA). Any built development on this site would be highly visible in wide ranging views; local, mid and long; due to the distinct	

landform: edge of river valley, and prevailing characteristics of the settlement. Thus, the magnitude of change resulting from residential development (the CfS is undertaken to assess land for housing allocation in the emerging NDP) on the landscape and the rural character of the settlement is considered to be significantly adverse.

Development would fundamentally alter the character of this land from undeveloped open countryside to urban built form.

For the above reasons the site is not recommended to be taken forward to the next stage.

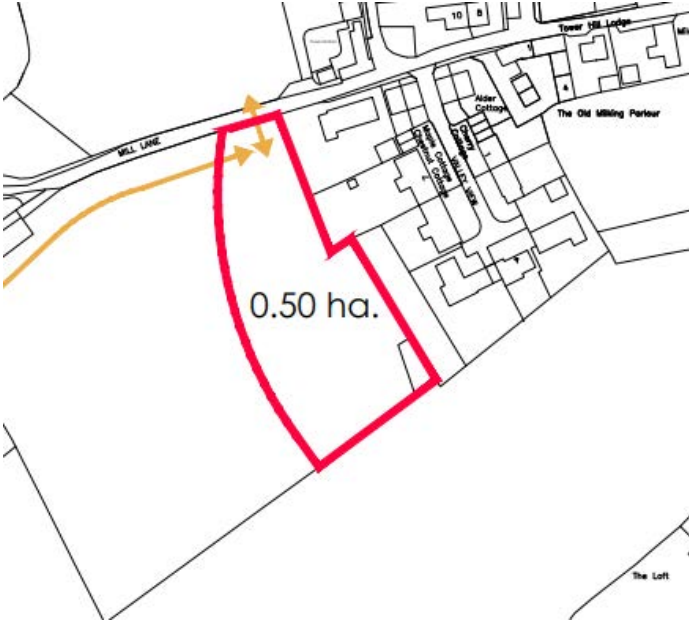
Enclosures

Land at Tower Hill Farm, Beckington		BECK005b
Town/Parish: Beckington	Division: Frome North	Re-promoted
Site Description / Adjacent Land Uses		
Greenfield site (currently sheep grazing and dog walking park), to the north of Mill Lane and to the west of Beckington. Surrounded by residential and agricultural land. Highway access unknown.		
 © Crown copyright and database rights 2023 Ordnance Survey AC0000861332. Additional information © Somerset Council		
Proposed Development		
Total site area - 1 Ha (all developable).		
Proposal - 10 dwellings (market, affordable, self-build, custom-build) starting 2024-2026.		
Policy Status and Policies Map Designations		
Adjacent to development limit.		
No other policy map designations.		
Planning History / SHLA Status / Eligibility (fr permissions)		
2021/086/FUL – application for dog walking park (approved). Included land at BECK005a and BECK005c.		
2023/1369/FUL – alterations to above permission (withdrawn 19/09/2023). Included land at BECK005a and BECK005c.		
Flood Risk		
River flooding – Flood Zone 1.		
Surface water flooding – Very low risk.		
Conservation Area / Listed Buildings / Areas of High Archaeological Potential		
None.		
Designated Landscape		
No impact on AONB or Special Landscape Features.		
Landscape Character Area B3: Lower Frome Valley.		
Accessibility		
Corner shop/food shop	675	M&S Simply Food
Primary school (secondary school)	609	Beckington Church of England First School
GP Surgery	699	Beckington Family Practice
Bank/Post Office	2.54km	Rode Post Office
Community hub (pub/hall)	427	Beckington Memorial Hall
Open space (can be provided on site)	432	Beckington Playground
Employment cluster	1.5km	Frome Road, Rode
Bus stop	297	Bus Stop
Town centre/high order hub	5.1km	Frome
Settlement Strategy (CP1, CP2)		
3a	Status in adopted settlement hierarchy	Primary Village
	Housing delivery above min requirement	32% growth in stock / 205% above CP2 minimum
	Re-use of land (greenfield/brownfield)	Greenfield / BMV land
	Relationship to development limit	Adjoining development limit
Site Constraints and characteristics (DP1, DP8, DP21)		
	Physical and infrastructure constraints	Some - telegraph poles and old farm building
	Contamination and Ground Conditions	None
	Sewage Treatment Works Buffer Zone	Yes
	Impact on Minerals and Waste Policies	None
Designated and Priority Habitats (DP5, DP6)		
C	RAMSAR Phosphate Mitigation Requirement	Outside catchment area
	Special Areas of Conservation (SAC)	Mells Valley Bats SAC - Band C
	SSSI - Sensitivity to Designated Habitats	Low risk
	Impact on Priority Habitats & Local Wildlife sites	Low
Heritage and Landscape (DP1, DP3, DP4)		
	Impact on heritage assets	None
	Impact on settlement character	Harm would be difficult to mitigate
	Impact on landscape character	Harm would be difficult to mitigate
Highways, Accessibility and Infrastructure		
	Settlement connectivity	Frequent bus service, <5km from Frome
	Education Capacity	No short-term primary school capacity
	Lead Local Flood Authority High Level comments	Potential flooding issues - see Technical Appendix Part 3
	Highways Authority -High Level comments	NOP - but subject to cumulative impacts - see BECK005a
	Cumulative development impacts near site	Highways impact on A36 roundabouts/flood risk
Deliverability		
	Planning Status	Application for a dog walking site
	Conformity with LLP1/LPP2 policies/allocations	Outside but adjacent to DL
	Impact on neighbourhood plans/ other plans	
	Ownership & Availability	Multiple ownership, available
	Marketability	Enquiries received
	Progress on Phosphate Mitigation Solution	Not applicable
	Impact on A36 Improvements - Policy DP27	Likely development delay or Nat Highways holding objection
	Strategic or Local Risks to delivery	
Notes		
Physical and infrastructure constraints: building in SE corner, old farm building, telegraph pole and overhead line cross south of site.		
Highways: Due to cumulative effects on A36 roundabouts, even smaller schemes may be subject to a TP requirement that may rule the site out. Policy DP27 financial contributions will apply. Constraint dependent on progress with Mitigation/Improvement Programme being addressed as part of SGV application - see FR0225a.		
Summary:		
Site is on the edge of a village that has delivered significantly in excess of CP2 requirements.		
It would impact settlement character, local distinctiveness and landscape character. It is BMV land. Education capacity is limited and drainage has been an issue for the village. Financial contributions would be required for the A36 roundabout.		
The site is not suitable for allocation.		

Site Assessment Form

Completed by: WH (BPA)	
Date: 02/12/2024	
Site Name / Ref	BNDP_SA_2d_Land_South_of_Mill_Lane
Site Address	Land to the South of Mill Lane, Beckington
Site Area (hectares)	0.5ha

Description/ Overview




The site forms part of a larger grassland field currently in use as pastureland/grazing.

The submission documentation details land parcel site ref 2d forms part of a wider tract of land (including site ref 2b, 2c and 2e) used for dog exercise (classified as Sui Generis Use – approved under 2021/0868/FUL).


The land is proposed to be served off Mill Lane that runs adjacent to the northern boundary.

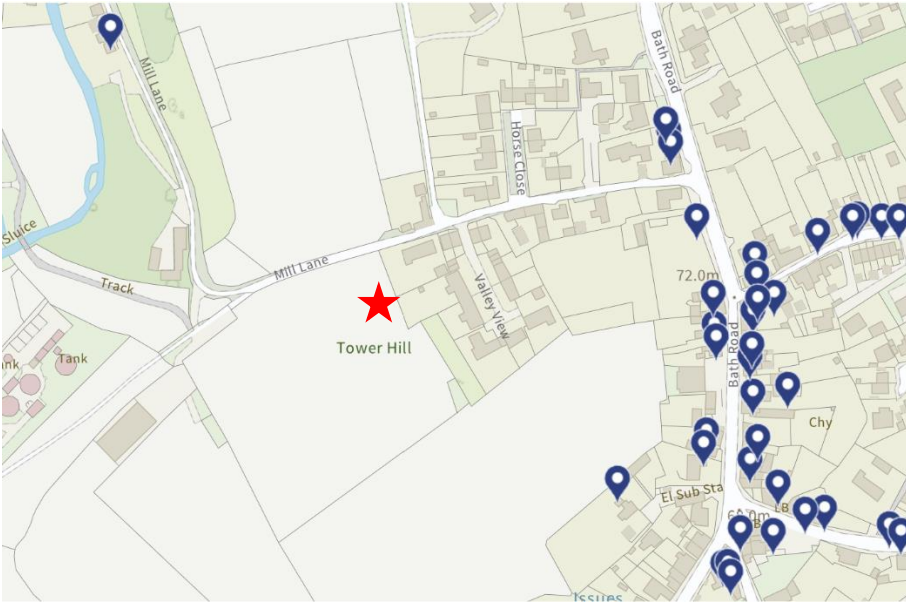
The site adjoins the existing built form of the settlement along its western boundary. Open countryside wraps round the site area to the north, west and south.

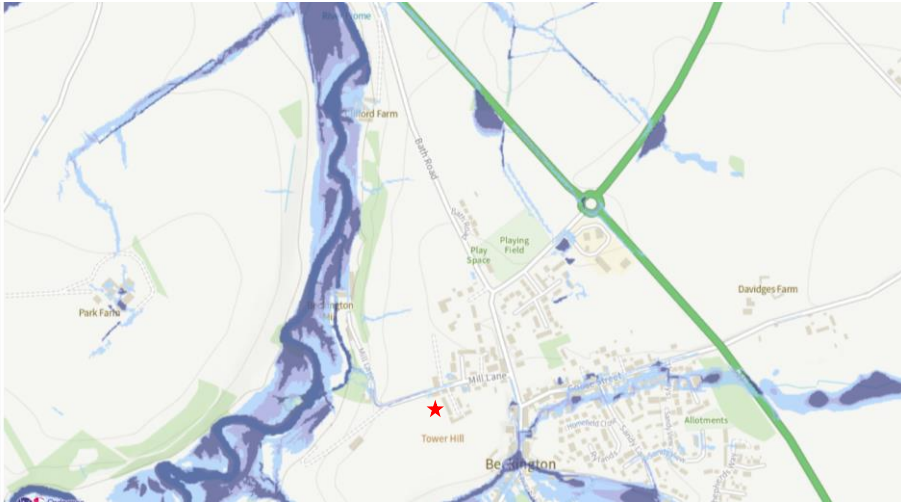
The site is located on the edge of a river valley on exposed plateau.

The site was submitted in the 2023 SHELAA as part of the site with the reference BECK005c.

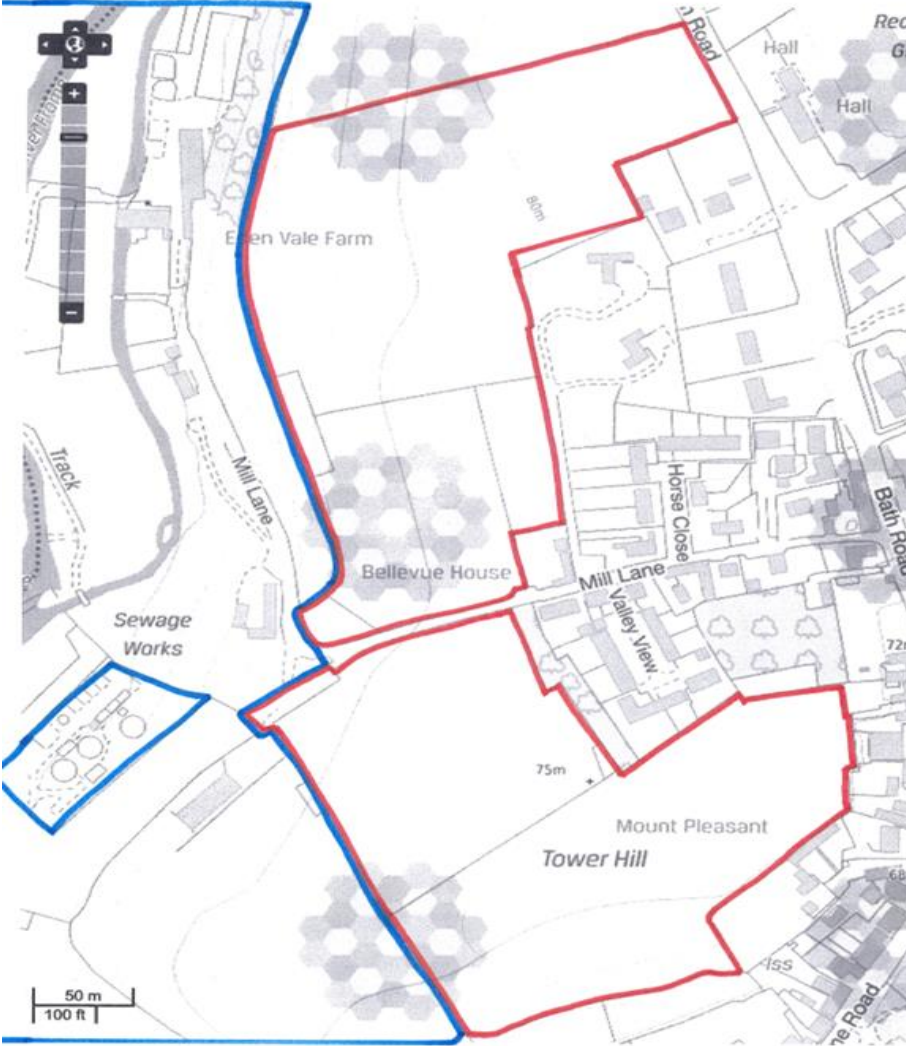
Planning Policy Considerations

Settlement boundary	 The site falls outside but adjacent to the defined development boundary – shown denoted with a red line in the above mapping extract.
Conservation Area	The site is outside of the Beckington Conservation Area – the conservation area boundary is shown by a purple line below. 
Other landscape Designation (please state)	The site lies within National Character Area 117 – Avon Vales and local Landscape Character Assessment (2020) Area B3: <i>Lower Frome Valley Spring Gardens, Beckington to Farleigh Hungerford</i>. Key physical/natural characteristics are defined as: Main river valley; Modest scale river and flood plain landscape; Areas of gently rolling plateau; and Limited woodland cover.
Nature Conservation Designation	Bat Consultation Zone Mells Valley SAC – Band B. Vallis Vale (SSSI) Impact Risk Zone.
Listed Buildings within site	There are no listed buildings within the site area.

Listed Buildings adjacent to site	There are no listed buildings within the immediate vicinity of the site. Nearest listed buildings shown on Historic England mapping extract below. 
Tree Preservation Order	No TPOs found on the MENDIP interactive mapping.
Flood Zone	The site is located within Flood Zone 1 which has the lowest probability of flood risk from rivers and sea – as shown in EA Flood mapping for Planning extract below.

	
Surface Water Flooding	There is a low risk of flooding due to surface water at the site. However, there is scattered low to medium risk along the road at Mill Lane (the northern boundary of the site). 
Public Rights of Way	No PROW cross the site. However, the site is highly visible in PROW footpaths ref FR 1/3 to the southwest and the Macmillan Way FR 1/4 which is a long-distance recreational route.
Planning History	▪ Change of Use of Agricultural Field to Sui Generis Use of field for exercising dogs.

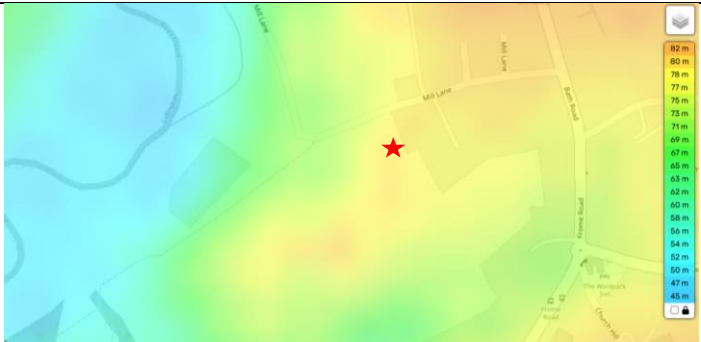
	Ref. No: 2021/0868/FUL Status: Approval ▪ <u>Approval of details reserved by condition 5 (Parking Area) on planning consent 2021/0868/FUL.</u> Ref. No: 2021/2416/APP Status: Approval ▪ <u>Application for a non-material amendment to permission 2021/0868/FUL for the change to operating hours to Monday to Saturday 9am to 5pm</u> Ref. No: 2021/2565/NMA Status: Approval Non-Material Amendment ▪ <u>Change of Use of Agricultural Field to Sui Generis Use of field for exercising dogs, construction of Agricultural Store, and Reception Building, including associated access and parking. (Resubmission of 2021/0868/FUL).</u> Ref. No: 2023/1369/FUL Status: Application Withdrawn ▪ <u>Application to vary condition 3 (Hours of Use) of planning approval 2021/0868/FUL (Change of Use of Agricultural Field to Sui Generis Use of field for exercising dogs.) to 8am - 6pm. (updated location plan)</u> Ref. No: 2023/1863/VRC Status: Withdrawn ((notification of appeal has been received by LPA at the time of writing).
--	--

	LOCATION PLAN - EDEN VALE FARM, BECKINGTON  1:1250 © A4
Other designations affecting site (local plan)	Sewage Works Buffer Zone.

	Beckington emerging NDP Local Green Space map:  The site forms part of a draft Local Green Space designation in the emerging Beckington Neighbourhood Development Plan. Whilst this designation carries limited weight in plan-making and decision-taking at this present time it should be considered as part of this NDP housing site assessments.
Agricultural Grade	The majority of the site falls within agricultural land classification Grade 1 (denoted in blue in MAGIC mapping extract below) which is the 'best and most versatile' agricultural land. A narrow strip of Grade 3a land can be seen coloured dark green at the

	northernmost part of the site. 
--	---

Site Appraisal

Access to Site	Existing field access is from the farm building located to the southwest. The proposed new point of access for any future development is detailed from Mill Lane along the northern site boundary. Given the differing land levels between Mill Lane and the westernmost part of the existing field (the site) this would require considerable engineering works with the loss of native hedgerow, a traditional field pattern enclosure, and biodiversity corridor.
Topography	 The site features an elevated topography, with a rise toward the centre – exposed landscape plateau. The land slopes downward

	toward the east: river valley. The site is situated on higher ground than surrounding areas to the north, south, east and west.
Views into the site	The site is highly visible in a range of views from the surrounding area. The site area lies on an exposed landscape plateau on the edge of a river valley. Due to this distinct landform the site is prominent and highly visible in a range of views including important local views from Mill Lane and PROWs to the west. The site forms part of a wider appreciated view of this part of the settlement from the south and east. This wider appreciated view from various viewpoints along with the contribution this land makes to the local area has been identified as important and worthy of protection in the emerging NDP. The site forms part of an identified Local Green Space (LGS) (ref 6) and in protected views (ref 2, 3, 4 and 5). These findings are consistent with the SHELAA site assessment undertaken by the LPA. Established hedgerow along the northern boundary along with land relief and the fall of the road limits transient views into the site from Mill Lane looking southwards. Should the site be considered further in the NDP process the LPA's landscape officer should be consulted.
Views out of the site	Long distance views are available to the west, south and north of the site. Views to the east are enclosed by existing residential development located on the edge of the settlement.
Vegetation	 Hedgerow/vegetation along the northern boundary of the site.
Hydrological features	None.
Other on-site features	Telegraph poles to the southern boundary of the site.
Signs of contamination?	Not evident.

Current use of site	The submission documents suggest permission for dog walking has been implemented. This was not apparent from my site visit. The current use would appear to be agricultural pasture/grazing land.
Any known previous use?	Agriculture
Utilities on site?	Unknown
Character of	Agriculture. Open countryside. Rural. River valley with undulating landscape plateau.
Neighbouring Land Uses	Residential to the east of the site. There are agricultural fields to the north, south and the west of the site.
Design Layout Issues	Development of the site area would result in the subdivision of the existing historical field pattern. Any built development on this site would be highly visible in wide ranging views; local, mid and long; due to the distinct landform: landscape plateau on edge of river valley. The site forms part of the foreground to this part of the settlement (western) which plays an important role in terms of its contribution to the rural character of this part of the settlement (westernmost). For this reason and in my opinion, design considerations would fail to overcome or suitably mitigate against the impact of development on the rural character of this part of the settlement. In the main, the built form of the settlement nestles discreetly in the undulating form of the plateau landscape. Any built development on this site would appear at odds with this prevailing characteristic and fail to protect local distinctiveness. Typically, an edge of settlement location would require soft transitional arrangements: density, form, scale, height, layout and landscaping.
Height and character of surrounding buildings	The surrounding buildings off Mill Lane consist of one, two and two-and-a-half storey.

Availability

Ownership	
------------------	--

Owner supportive of development?	Yes
Time frame in which site could be developed	Available immediately.

Development Potential

Is the site considered appropriate for development?	No
Can the entire site be developed?	No
Potential Development N/A	
Any known developer interest?	Unknown at this stage.

Suitability

Which category does this site fall into? Please give reasons for your choice (what are the problems if any) 1. Inappropriate – development would have a significant adverse impact on landscape, local distinctiveness, and the rural character of the settlement. 2. Significant constraints 3. Minor constraints 4. Unconstrained
--

Assessment conclusions

Site Available	Yes
Site Suitable	No
Site Achievable	No
Conclusion The site is highly visible in extensive and long-distance views, making the landscape impact a significant factor to consider.	

Beckington is identified in the adopted Development Plan as a 'Primary Village' wherein "new development that is tailored to meet local needs will be provided for" (Core Policy 1: Mendip Spatial Strategy). Although the site lies outside of the defined development boundary, the western site boundary lies adjacent along this edge.

Any built development on this site would be highly visible in wide ranging views; local, mid and long; due to the distinct landform: edge of river valley, and prevailing characteristics of the settlement. Thus, the magnitude of change resulting from residential development (the CfS is undertaken to assess land for housing allocation in the emerging NDP) on the landscape and the rural character of the settlement is considered to be significantly adverse.

The site and views over the site have been identified as important and worthy of protection in the emerging NDP as LGS (ref 6) and Protected Views (ref View no. 2, 3, 4 and 5). Development would fundamentally alter the character of this land from undeveloped open countryside to urban built form.

In my opinion the existing development at Valley View when viewed from the west appears at odds with the prevailing urban grain and softly screened verdant edge of this part of the settlement. Development of the site would further compound and increase the prominence of this alien feature causing harm to the rural characteristics and distinctiveness of this settlement edge.

For the above reasons the site is not recommended to be taken forward to the next stage.

Should this site be progressed further in the BNDP process the LLHA and LLFA must be consulted due to the creation of a new residential access off Mill Lane, a narrow single track rural lane, and given known issues relating to the capacity of local foul drainage and the A36.

Enclosures

Land at Tower Hill Farm, Beckington		BECK005c
Town/Parish: Beckington	Division: Frome North	Re-promoted
Site Description / Adjacent Land Uses Greenfield site (currently sheep grazing and dog walking park), to the south of Mill Lane and to the west of Beckington. Surrounded by residential and agricultural land. Highway access unknown.		
 © Crown copyright and database rights 2023 Ordnance Survey AC0000861332. Additional Information © Somerset Council		
Proposed Development Total site area - 2 Ha (1.25 Ha developable). Proposal - 30 dwellings (market, affordable, self-build, custom-build) starting 2024-2026.		
Policy Status and Policies Map Designations Adjacent to development limit. No other policy map designations.		
Planning History / SHLAA Status / Eligibility (for permissions) 2021/0868/FUL – application for dog walking park (approved). Included land at BECK005a and BECK005b. 2023/1369/FUL – alterations to above permission (withdrawn 19/09/2023). Included land at BECK005a and BECK005b.		
Flood Risk River flooding – Flood Zone 1. Surface water flooding – Scattered areas to east of high, medium and low risk.		
Conservation Area / Listed Buildings / Areas of High Archaeological Potential Conservation Area: Adjacent to Beckington Conservation Area. Listed Buildings: Adjacent and in close proximity. AHAP: Adjacent.		
Designated Landscape No impact on AONB or Special Landscape Features. Landscape Character Area B3: Lower Frome Valley.		
Accessibility		
Corner shop/food shop	679	M&S Simply Food
Primary school (secondary school)	611	Beckington Church of England First School
GP Surgery	702	Beckington Family Practice
Bank/Post Office	2.56km	Rode Post Office
Community hub (pub/hall)	432	Beckington Memorial Hall
Open space (can be provided on site)	435	Beckington Playground
Employment cluster	1.5km	Frome Road, Rode
Bus stop	301	Bus Stop
Town centre/high order hub	5.2km	Frome
Settlement Strategy (CP1, CP2)		
	Status in adopted settlement hierarchy	Primary Village
	Housing delivery above min requirement	32% growth in stock / 205% above CP2 minimum
1, 3a	Re-use of land (greenfield/brownfield)	Greenfield
	Relationship to development limit	Adjoining development limit
Site Constraints and characteristics (DP1, DP8, DP21)		
	Physical and infrastructure constraints	Some - telegraph poles and overhead lines
	Contamination and Ground Conditions	None
	Sewage Treatment Works Buffer Zone	Yes (part)
	Impact on Minerals and Waste Policies	None
Designated and Priority Habitats (DP5, DP6)		
	RAMSAR Phosphate Mitigation Requirement	Outside catchment area
C	Special Areas of Conservation (SAC)	Mells Valley Bats SAC - Band C
	SSSI - Sensitivity to Designated Habitats	Low risk
	Impact on Priority Habitats & Local Wildlife sites	Low
Heritage and Landscape (DP1, DP3, DP4)		
	Impact on heritage assets	Adjacent to Beckington Conservation Area & AHAP. Listed buildings adjacent.
	Impact on settlement character	Harm would be difficult to mitigate
	Impact on landscape character	Harm would be difficult to mitigate
Highways, Accessibility and Infrastructure		
	Settlement connectivity	Frequent bus service, <5km from Frome
	Education Capacity	No short-term primary school capacity
	Lead Local Flood Authority High Level comments	Potential flooding issues - see Technical Appendix Part 3
	Highways Authority - High Level comments	NOP - but subject to cumulative impacts - see BECK005a
	Cumulative development impacts near site	Highways impact on A36 roundabouts/flood risk
Deliverability		
	Planning Status	Application for a dog walking site
	Conformity with LLP1/LPP2 policies/allocations	Outside but adjacent to DL
	Impact on neighbourhood plans/ other plans	
	Ownership & Availability	Multiple ownership, available
	Marketability	Enquiries received
	Progress on Phosphate Mitigation Solution	Not applicable
	Impact on A36 Improvements - Policy DP27	Likely development delay or Nat Highways holding objection
	Strategic or Local Risks to delivery	
Notes Physical and infrastructure constraints: telegraph poles and overhead lines cross northern part of site. Highways: due to cumulative effects on A36 roundabouts, even smaller schemes may be subject to a TP requirement that may rule the site out. Policy DP27 financial contributions will apply. Constraint dependent on progress with Mitigation/Improvement Programme being addressed as part of SGV application - see FRO225a.		
Summary: Site is on the edge of a village that has delivered significantly in excess of CP2 requirements. It would impact settlement character, local distinctiveness and landscape character. Site is BMV agricultural land. Education capacity is limited and drainage has been an issue for the village. Financial contributions would be required for the A36 roundabout. The site is not suitable for allocation.		

Site Assessment Form

Completed by: WH (BPA)

Date: 02/12/2024

Site Name / Ref

BNDP_SA_2e_Land_west_of_Bath_Frome_Road

Land west of the Bath/Frome Road

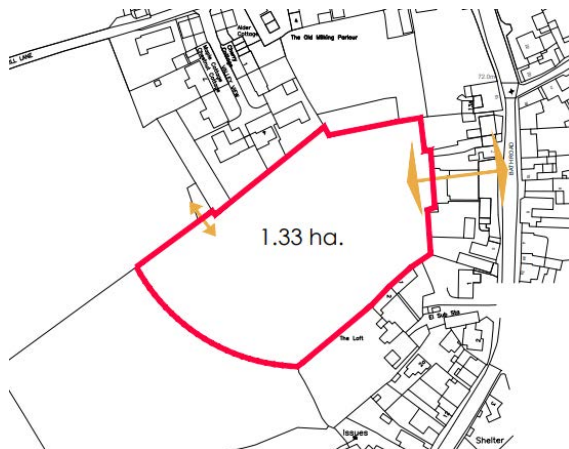
Site Address

Land west of the Bath/Frome Road, BA11 6SZ

Site Area (hectares)

1.33 ha

Description/ Overview



The site forms part of a larger grassland field currently used as pasture/grazing land.

The submission documentation details land parcel site ref 2e forms part of a wider tract of land (including site ref 2b, 2c and 2d) used for dog exercise (classified as Sui Generis Use – approved under 2021/0868/FUL).

The submission documents state that access to the site is proposed to be served from either Bath Road or Mill Lane. Access from the Bath Road would require third party agreement and via Mill Lane would require the creation of a new point of access.

The site adjoins the existing built form of the settlement along part of the northern and southern site boundaries, and along the eastern extent. Open countryside extends westwards.

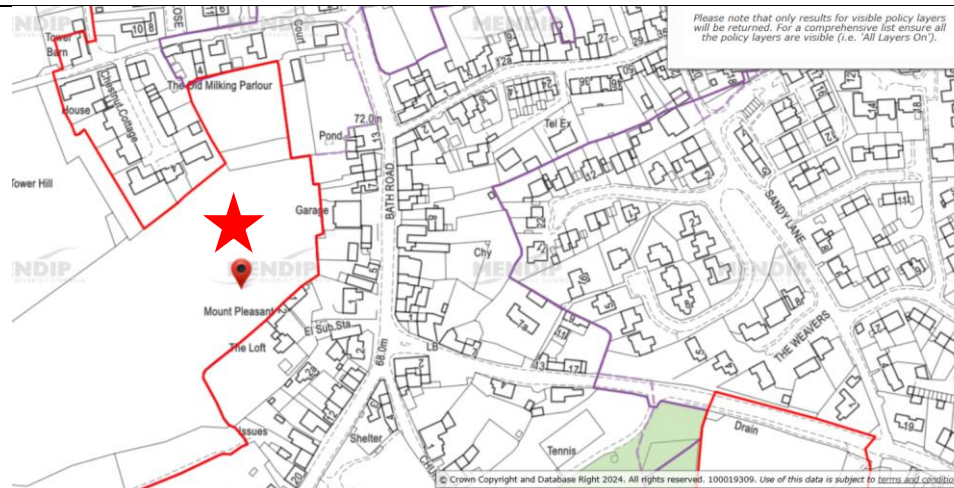
A number of designated heritage assets adjoin the site – listed buildings and conservation area.

The site is located on the edge of a river valley on exposed plateau.

The site was submitted in the 2023 SHELAA as part of the site with the reference BECK005c.

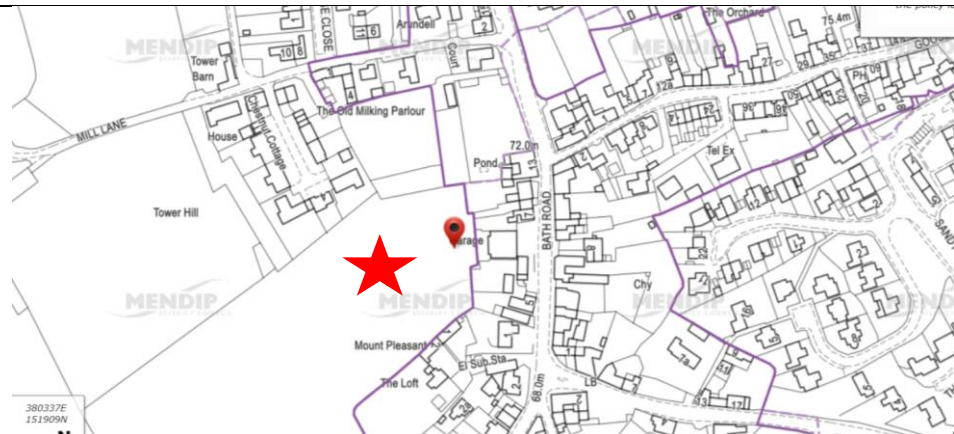
Planning Policy Considerations

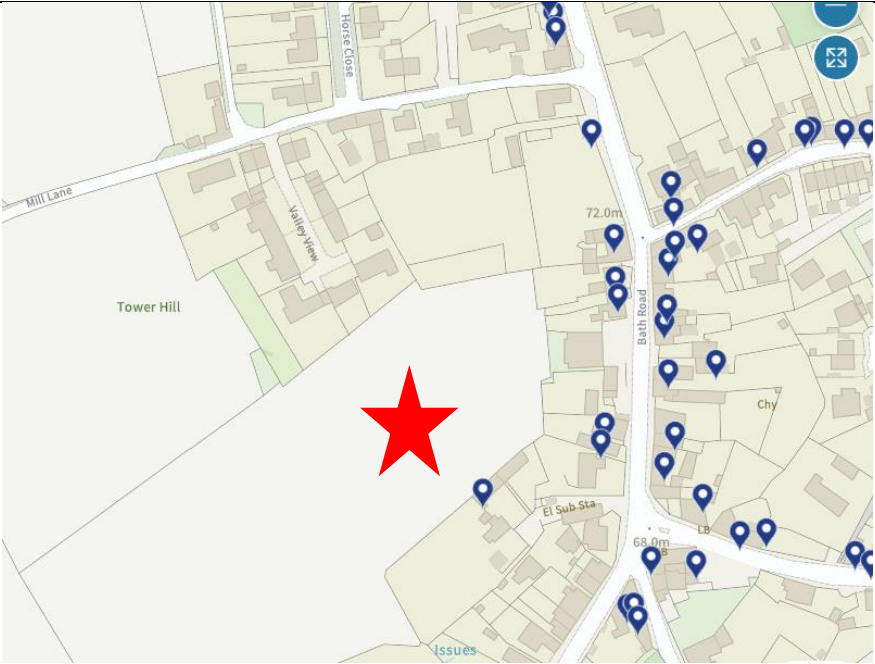
Settlement boundary

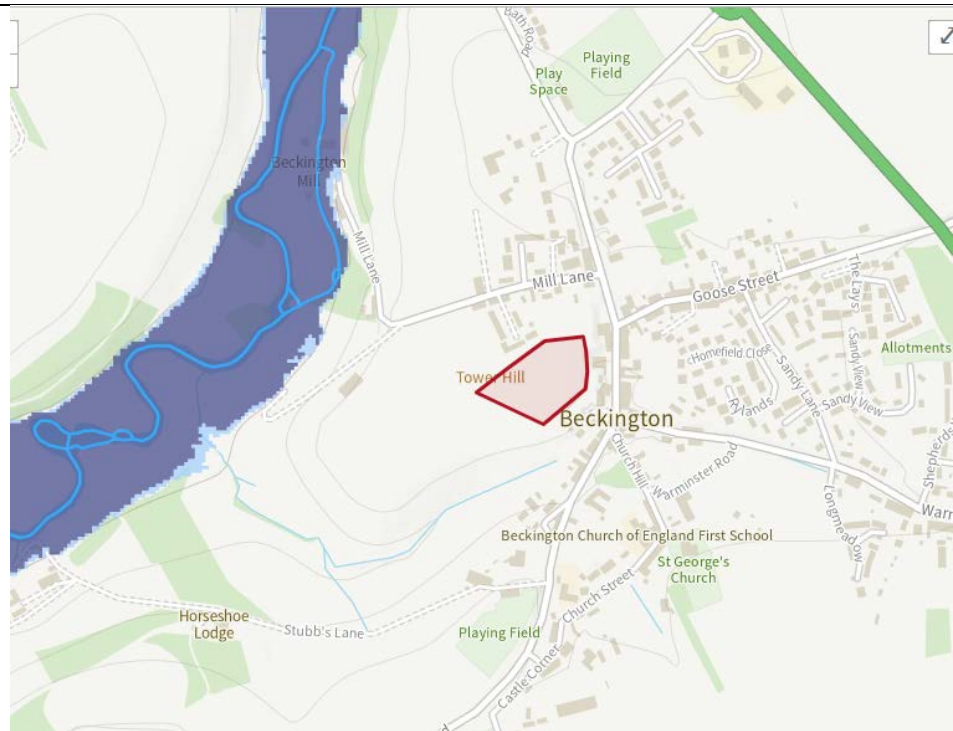


The site is outside but adjacent to the defined settlement boundary – denoted by red line in above mapping extract.

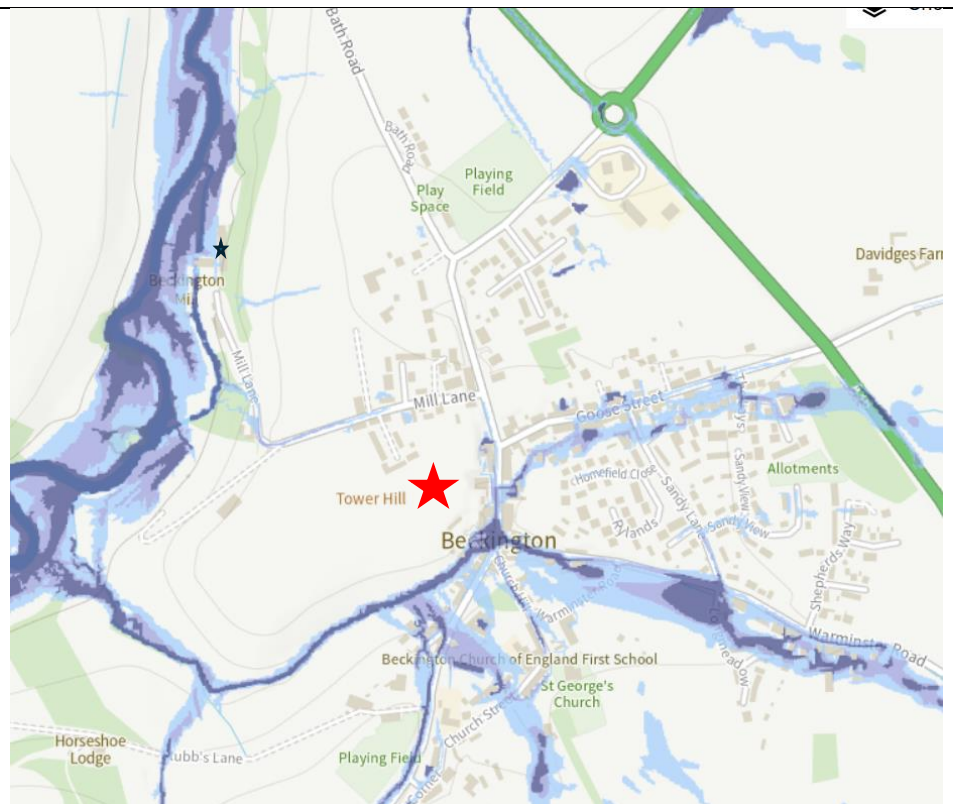
Conservation Area



	The site adjoins the Beckington Conservation Area along its southern and eastern boundaries - the boundary of the conservation area is shown by a purple line above.
Landscape Designation or Landscape Character Area (please state)	The site lies within National Character Area 117 – Avon Vales and local Landscape Character Assessment (2020) Area B3: Lower Frome Valley Spring Gardens, Beckington to Farleigh Hungerford. Key physical/natural characteristics are defined as: Main river valley; Modest scale river and flood plain landscape; Areas of gently rolling plateau; and Limited woodland cover.
Nature Conservation Designation	Bat Consultation Zone Mells Valley SAC – Band B. Vallis Vale (SSSI) Impact Risk Zone.
Listed Buildings within site	No listed buildings lie within the site area.
Listed Buildings adjacent to site	 A number of Grade II and Grade II* listed buildings directly adjoin the site to the north, east and south – see Historic England mapping extract above. The site lies behind the historic core of the settlement.
Tree Preservation Order	No TPO's shown on the Mendip interactive mapping online resource within the site area or within the immediate vicinity.
Flood Zone	The site is within located within Flood Zone 1 which has a low probability of flood risk from rivers and sea – see EA Flood map for Planning extract below.



Surface Water Flooding



The site has a low probability of flood risk from surface water.

Public Rights of Way	As shown in mapping extract below no PROW cross the site. However, the site is highly visible in PROW footpaths ref FR 1/3 to the southwest and the Macmillan Way FR 1/4 which is a long-distance recreational route. 
Planning History	▪ Change of Use of Agricultural Field to Sui Generis Use of field for exercising dogs. Ref. No: 2021/0868/FUL Status: Approval ▪ Approval of details reserved by condition 5 (Parking Area) on planning consent 2021/0868/FUL. Ref. No: 2021/2416/APP Status: Approval ▪ Application for a non-material amendment to permission 2021/0868/FUL for the change to operating hours to Monday to Saturday 9am to 5pm Ref. No: 2021/2565/NMA Status: Approval Non-Material Amendment ▪ Change of Use of Agricultural Field to Sui Generis Use of field for exercising dogs, construction of Agricultural Store, and Reception Building, including associated access and parking. (Resubmission of 2021/0868/FUL). Ref. No: 2023/1369/FUL Status: Application Withdrawn ▪ Application to vary condition 3 (Hours of Use) of planning approval 2021/0868/FUL (Change of Use of Agricultural Field to Sui Generis Use of field for exercising dogs.) to 8am - 6pm. (updated location plan) Ref. No: 2023/1863/VRC Status: Withdrawn (notification of appeal has been received by LPA at the time of writing this assessment).
Other designations	Sewage Works Buffer Zone The site forms part of a draft Local Green Space designation in the emerging Beckington Neighbourhood Development Plan. Whilst

**affecting site
(local plan)**

this designation carries limited weight in plan-making and decision-taking at this present time it should be considered as part of this NDP housing site assessments.



**Agricultural
Grade**



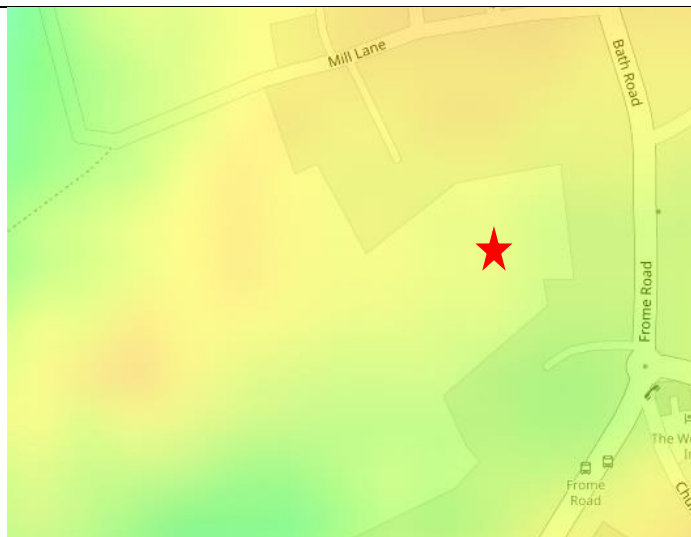
The site is classified as Grade 1 BMV agricultural land – see MAGIC mapping extract above.

Site Appraisal

Access to Site

The submission documents detail that vehicular access to the site would either be served from Mill Lane through the adjoining promoted site ref B_02_D or from the Bath/Frome Road which requires third party agreement.

Topography



	The site features an elevated topography on an exposed landscape plateau. The land slopes downward toward the east: river valley.
Views into the site	The site is highly visible in a range of views from the surrounding area. The site area lies on an exposed landscape plateau on the edge of a river valley. Due to this distinct landform the site is prominent and highly visible in a range of views including important local views from Mill Lane and PROWs to the west and southwest. The site forms part of a wider appreciated view of this part of the settlement from the south and east. This wider appreciated view from various viewpoints along with the contribution this land makes to the local area has been identified as important and worthy of protection in the emerging NDP. The site forms part of an identified Local Green Space (LGS) (ref 6) and in protected views (ref 2, 3, 4 and 5). Public vantage is limited to the east (Bath/Frome Road) by the existing built environment. These findings are consistent with the SHELAA site assessment undertaken by the LPA.
Views out of the site	Long distance views are available to the west and southwest. Views east and north are limited by existing development.
Vegetation	Grass land. Native hedgerow field boundaries with intermittent hedgerow trees to the north, east and south.
Hydrological features	No
Other on-site features	N/A
Signs of contamination	Not evident.
Current use of site	Agricultural. Planning permission for dog exercise - Sui Generis use. This would appear unimplemented as character of land is agricultural – grazing land.
Any known previous use?	Agriculture.
Utilities on site?	Unknown

Character of	Agriculture. Open countryside. Rural. River valley with undulating landscape plateau.
Neighbouring Land Uses	Agriculture. Residential.
Design Layout Issues	In my opinion, the site makes an important contribution to the setting of the numerous Grade II and Grade II* listed buildings that adjoin the site to the east and north, and the foreground to the designated Beckington Conservation Area. The site forms a significant part of the open rural context that characterises this part of the settlement. Development of this site would irrevocably erode and thereby fail to conserve the significance of the open rural setting on nearby designated heritage assets. Any built development on this site would be highly visible in wide ranging views; local, mid and long; due to the distinct landform: landscape plateau on edge of river valley. The site forms part of the foreground to this part of the settlement (western) which plays an important role in terms of its contribution to the rural character of this part of the settlement (westernmost). For this reason and in my opinion, design considerations would fail to overcome or suitably mitigate against the impact of development on the rural character of this part of the settlement. In the main, the built form of the settlement nestles discreetly in the undulating form of the plateau landscape. Any built development on this site would appear at odds with this prevailing characteristic and fail to protect local distinctiveness. Development of the site area would result in the subdivision of the existing historical field pattern.
Height and character of surrounding buildings	Predominantly two and two-and-a-half storey buildings.

Availability

Ownership	
Owner supportive of development?	Yes

Time frame in which site could be developed	Immediately
--	-------------

Development Potential

Is the site considered appropriate for development?	No.
Can the entire site be developed?	No.
Potential Development N/A	
Any known developer interest?	Unknown.

Suitability

Which category does this site fall into? Please give reasons for your choice (what are the problems if any) 1. Inappropriate – development would have a significant adverse impact on landscape, local distinctiveness, and the rural character of the settlement. 2. Significant constraints 3. Minor constraints 4. Unconstrained

Assessment conclusions

Site Available	Yes
Site Suitable	No - highly constrained: landscape and heritage.
Site Achievable	No.
Conclusion The site is highly visible in extensive and long-distance views, making the landscape impact an important matter to consider. Beckington is identified in the adopted Development Plan as a 'Primary Village' wherein "new development that is tailored to meet local needs will be provided for" (Core Policy 1: Mendip Spatial Strategy). Although the site lies outside of the defined development boundary, the western site boundary lies adjacent along this edge.	

Any built development on this site would be highly visible in wide ranging views; local, mid and long; due to the distinct landform: edge of river valley, and prevailing characteristics of the settlement. Thus, the magnitude of change resulting from residential development (the CfS is undertaken to assess land for housing allocation in the emerging NDP) on the landscape and the rural character of the settlement is considered to be significantly adverse.

The site and views over the site have been identified as important and worthy of protection in the emerging NDP as LGS (ref 6) and Protected Views (ref View no. 2, 3, 4 and 5). Development would fundamentally alter the character of this land from undeveloped open countryside to urban built form.

In my opinion the existing development at Valley View when viewed from the west appears at odds with the prevailing loose urban grain and softly screened verdant edge of this part of the settlement. Development of the site would further compound and extend this alien form causing harm to the rural characteristics and distinctiveness of this settlement edge.

New residential development on this site would result in substantial harm to the rural setting of a number of designated heritage assets including a Grade II* listed building which holds particular importance of more than special interest – only 5.8% of listed buildings are Grade II* (Historic England: historicengland.org.uk).

For the above reasons the site is not recommended to be taken forward to the next stage.

Should this site be progressed further in the BNDP process it is essential the LPA's conservation and landscape officers are consulted and their comments received. In addition, a Heritage Statement and Impact Assessment should be requested from the site promotor.

Further, the LLHA and LLFA should be consulted due to the creation of a new residential access off Mill Lane, which is a narrow single-track lane, and given the known issues relating to the capacity of local foul drainage system and the A36.

Enclosures

Land at Tower Hill Farm, Beckington		BECK005c																											
Town/Parish: Beckington		Division: Frome North																											
		Re-promoted																											
Site Description / Adjacent Land Uses Greenfield site (currently sheep grazing and dog walking park), to the south of Mill Lane and to the west of Beckington. Surrounded by residential and agricultural land. Highway access unknown.																													
		© Crown copyright and database rights 2023 Ordnance Survey AC0000661332 Additional Information © Somerset Council																											
Proposed Development Total site area - 2 Ha (1.25 Ha developable). Proposal - 30 dwellings (market, affordable, self-build, custom-build) starting 2024-2026.																													
Policy Status and Policies Map Designations Adjacent to development limit. No other policy map designations.																													
Planning History / SHLAA Status / Eligibility (for permissions) 2021/0868/FUL – application for dog walking park (approved). Included land at BECK005a and BECK005b. 2023/1369/FUL – alterations to above permission (withdrawn 19/09/2023). Included land at BECK005a and BECK005b.																													
Flood Risk River flooding – Flood Zone 1. Surface water flooding – Scattered areas to east of high, medium and low risk.																													
Conservation Area / Listed Buildings / Areas of High Archaeological Potential Conservation Area: Adjacent to Beckington Conservation Area. Listed Buildings: Adjacent and in close proximity. AHAP: Adjacent.																													
Designated Landscape No impact on AONB or Special Landscape Features. Landscape Character Area B3: Lower Frome Valley.																													
Accessibility <table><tr><td>Corner shop/food shop</td><td>679</td><td>M&S Simply Food</td></tr><tr><td>Primary school (secondary school)</td><td>611</td><td>Beckington Church of England First School</td></tr><tr><td>GP Surgery</td><td>702</td><td>Beckington Family Practice</td></tr><tr><td>Bank/Post Office</td><td>2.56km</td><td>Rode Post Office</td></tr><tr><td>Community hub (pub/hall)</td><td>432</td><td>Beckington Memorial Hall</td></tr><tr><td>Open space (can be provided on site)</td><td>435</td><td>Beckington Playground</td></tr><tr><td>Employment cluster</td><td>1.5km</td><td>Frome Road, Rode</td></tr><tr><td>Bus stop</td><td>301</td><td>Bus Stop</td></tr><tr><td>Town centre/high order hub</td><td>5.2km</td><td>Frome</td></tr></table>			Corner shop/food shop	679	M&S Simply Food	Primary school (secondary school)	611	Beckington Church of England First School	GP Surgery	702	Beckington Family Practice	Bank/Post Office	2.56km	Rode Post Office	Community hub (pub/hall)	432	Beckington Memorial Hall	Open space (can be provided on site)	435	Beckington Playground	Employment cluster	1.5km	Frome Road, Rode	Bus stop	301	Bus Stop	Town centre/high order hub	5.2km	Frome
Corner shop/food shop	679	M&S Simply Food																											
Primary school (secondary school)	611	Beckington Church of England First School																											
GP Surgery	702	Beckington Family Practice																											
Bank/Post Office	2.56km	Rode Post Office																											
Community hub (pub/hall)	432	Beckington Memorial Hall																											
Open space (can be provided on site)	435	Beckington Playground																											
Employment cluster	1.5km	Frome Road, Rode																											
Bus stop	301	Bus Stop																											
Town centre/high order hub	5.2km	Frome																											
Settlement Strategy (CP1, CP2) <table><tr><td>Status in adopted settlement hierarchy</td><td>Primary Village</td></tr><tr><td>Housing delivery above min requirement</td><td>32% growth in stock / 205% above CP2 minimum</td></tr><tr><td>1, 3a Re-use of land (greenfield/brownfield)</td><td>Greenfield</td></tr><tr><td>Relationship to development limit</td><td>Adjoining development limit</td></tr></table>			Status in adopted settlement hierarchy	Primary Village	Housing delivery above min requirement	32% growth in stock / 205% above CP2 minimum	1, 3a Re-use of land (greenfield/brownfield)	Greenfield	Relationship to development limit	Adjoining development limit																			
Status in adopted settlement hierarchy	Primary Village																												
Housing delivery above min requirement	32% growth in stock / 205% above CP2 minimum																												
1, 3a Re-use of land (greenfield/brownfield)	Greenfield																												
Relationship to development limit	Adjoining development limit																												
Site Constraints and characteristics (DP1, DP8, DP21) <table><tr><td>Physical and infrastructure constraints</td><td>Some - telegraph poles and overhead lines</td></tr><tr><td>Contamination and Ground Conditions</td><td>None</td></tr><tr><td>Sewage Treatment Works Buffer Zone</td><td>Yes (part)</td></tr><tr><td>Impact on Minerals and Waste Policies</td><td>None</td></tr></table>			Physical and infrastructure constraints	Some - telegraph poles and overhead lines	Contamination and Ground Conditions	None	Sewage Treatment Works Buffer Zone	Yes (part)	Impact on Minerals and Waste Policies	None																			
Physical and infrastructure constraints	Some - telegraph poles and overhead lines																												
Contamination and Ground Conditions	None																												
Sewage Treatment Works Buffer Zone	Yes (part)																												
Impact on Minerals and Waste Policies	None																												
Designated and Priority Habitats (DP5, DP6) <table><tr><td>RAMSAR Phosphate Mitigation Requirement</td><td>Outside catchment area</td></tr><tr><td>C Special Areas of Conservation (SAC)</td><td>Mells Valley Bats SAC - Band C</td></tr><tr><td>SSSI - Sensitivity to Designated Habitats</td><td>Low risk</td></tr><tr><td>Impact on Priority Habitats & Local Wildlife sites</td><td>Low</td></tr></table>			RAMSAR Phosphate Mitigation Requirement	Outside catchment area	C Special Areas of Conservation (SAC)	Mells Valley Bats SAC - Band C	SSSI - Sensitivity to Designated Habitats	Low risk	Impact on Priority Habitats & Local Wildlife sites	Low																			
RAMSAR Phosphate Mitigation Requirement	Outside catchment area																												
C Special Areas of Conservation (SAC)	Mells Valley Bats SAC - Band C																												
SSSI - Sensitivity to Designated Habitats	Low risk																												
Impact on Priority Habitats & Local Wildlife sites	Low																												
Heritage and Landscape (DP1, DP3, DP4) <table><tr><td>Impact on heritage assets</td><td>Adjacent to Beckington Conservation Area & AHAP. Listed buildings adjacent.</td></tr><tr><td>Impact on settlement character</td><td>Harm would be difficult to mitigate</td></tr><tr><td>Impact on landscape character</td><td>Harm would be difficult to mitigate</td></tr></table>			Impact on heritage assets	Adjacent to Beckington Conservation Area & AHAP. Listed buildings adjacent.	Impact on settlement character	Harm would be difficult to mitigate	Impact on landscape character	Harm would be difficult to mitigate																					
Impact on heritage assets	Adjacent to Beckington Conservation Area & AHAP. Listed buildings adjacent.																												
Impact on settlement character	Harm would be difficult to mitigate																												
Impact on landscape character	Harm would be difficult to mitigate																												
Highways, Accessibility and Infrastructure <table><tr><td>Settlement connectivity</td><td>Frequent bus service, <5km from Frome</td></tr><tr><td>Education Capacity</td><td>No short-term primary school capacity</td></tr><tr><td>Lead Local Flood Authority High Level comments</td><td>Potential flooding issues - see Technical Appendix Part 3</td></tr><tr><td>Highways Authority -High Level comments</td><td>NOP - but subject to cumulative impacts - see BECK005a</td></tr><tr><td>Cumulative development impacts near site</td><td>Highways impact on A36 roundabouts/flood risk</td></tr></table>			Settlement connectivity	Frequent bus service, <5km from Frome	Education Capacity	No short-term primary school capacity	Lead Local Flood Authority High Level comments	Potential flooding issues - see Technical Appendix Part 3	Highways Authority -High Level comments	NOP - but subject to cumulative impacts - see BECK005a	Cumulative development impacts near site	Highways impact on A36 roundabouts/flood risk																	
Settlement connectivity	Frequent bus service, <5km from Frome																												
Education Capacity	No short-term primary school capacity																												
Lead Local Flood Authority High Level comments	Potential flooding issues - see Technical Appendix Part 3																												
Highways Authority -High Level comments	NOP - but subject to cumulative impacts - see BECK005a																												
Cumulative development impacts near site	Highways impact on A36 roundabouts/flood risk																												
Deliverability <table><tr><td>Planning Status</td><td>Application for a dog walking site</td></tr><tr><td>Conformity with LLP1/LPP2 policies/allocations</td><td>Outside but adjacent to DL</td></tr><tr><td>Impact on neighbourhood plans/ other plans</td><td></td></tr><tr><td>Ownership & Availability</td><td>Multiple ownership, available</td></tr><tr><td>Marketability</td><td>Enquiries received</td></tr><tr><td>Progress on Phosphate Mitigation Solution</td><td>Not applicable</td></tr><tr><td>Impact on A36 Improvements - Policy DP27</td><td>Likely development delay or Nat Highways holding objection</td></tr><tr><td>Strategic or Local Risks to delivery</td><td></td></tr></table>			Planning Status	Application for a dog walking site	Conformity with LLP1/LPP2 policies/allocations	Outside but adjacent to DL	Impact on neighbourhood plans/ other plans		Ownership & Availability	Multiple ownership, available	Marketability	Enquiries received	Progress on Phosphate Mitigation Solution	Not applicable	Impact on A36 Improvements - Policy DP27	Likely development delay or Nat Highways holding objection	Strategic or Local Risks to delivery												
Planning Status	Application for a dog walking site																												
Conformity with LLP1/LPP2 policies/allocations	Outside but adjacent to DL																												
Impact on neighbourhood plans/ other plans																													
Ownership & Availability	Multiple ownership, available																												
Marketability	Enquiries received																												
Progress on Phosphate Mitigation Solution	Not applicable																												
Impact on A36 Improvements - Policy DP27	Likely development delay or Nat Highways holding objection																												
Strategic or Local Risks to delivery																													
Notes Physical and infrastructure constraints: telegraph poles and overhead lines cross northern part of site. Highways: due to cumulative effects on A36 roundabouts, even smaller schemes may be subject to a TP requirement that may rule the site out. Policy DP27 financial contributions will apply. Constraint dependent on progress with Mitigation/Improvement Programme being addressed as part of SGV application - see FRO225a.																													
Summary: Site is on the edge of a village that has delivered significantly in excess of CP2 requirements. It would impact settlement character, local distinctiveness and landscape character. Site is BMV agricultural land. Education capacity is limited and drainage has been an issue for the village. Financial contributions would be required for the A36 roundabout. The site is not suitable for allocation.																													

Site Assessment Form

Completed by: WH (BPA)

Date: 25th November 2024

Site Name / Ref	BNDP_SA_3a_Land_off_Bath_Road
Site Address	Land off Bath Road, Beckington
Site Area (hectares)	2.55 hectares

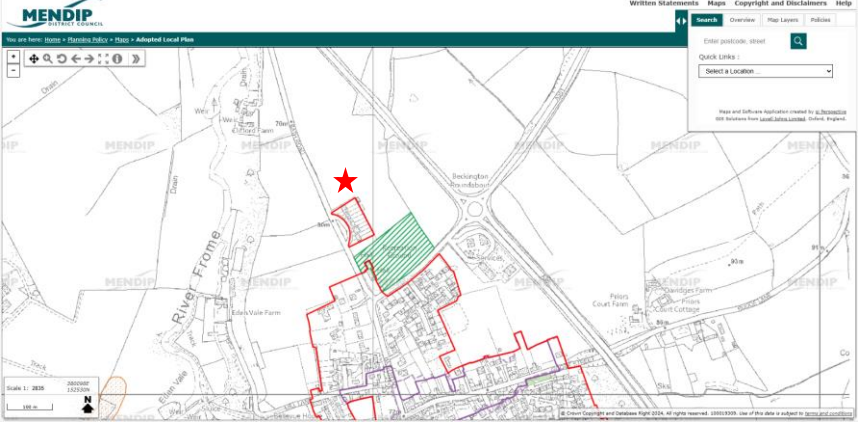
Description/ Overview



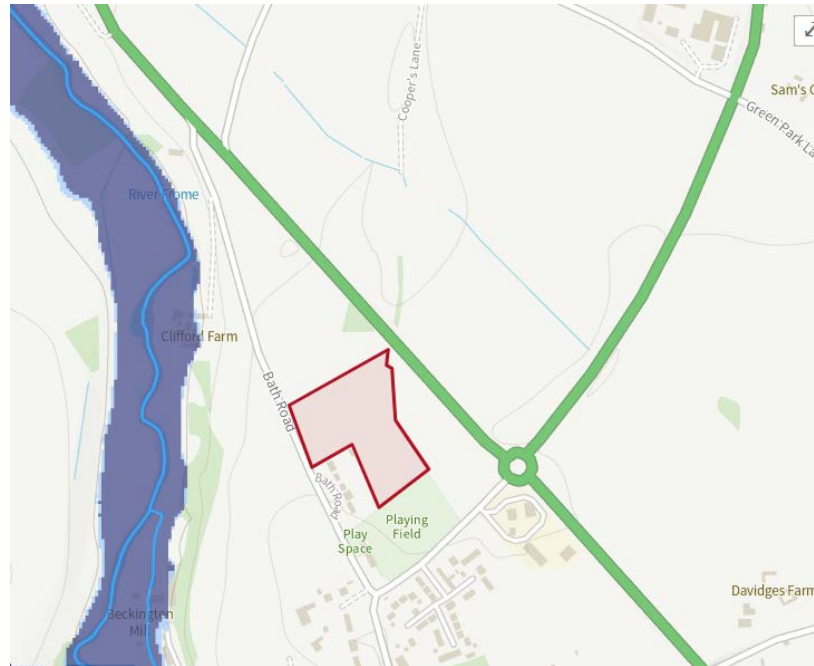
A greenfield site located to the north of Beckington. The site is accessed via Bath Road and is primarily surrounded by agricultural land, with some residential properties adjoining to the south-southwest. The village 'Memorial' hall and associated outdoor playing field lies to the south. A substantial hedgerow/tree belt forms the eastern site boundary creating a defining landscape feature.

The site forms part of 'BECK029' in the SHELAA (2023).

Planning Policy Considerations

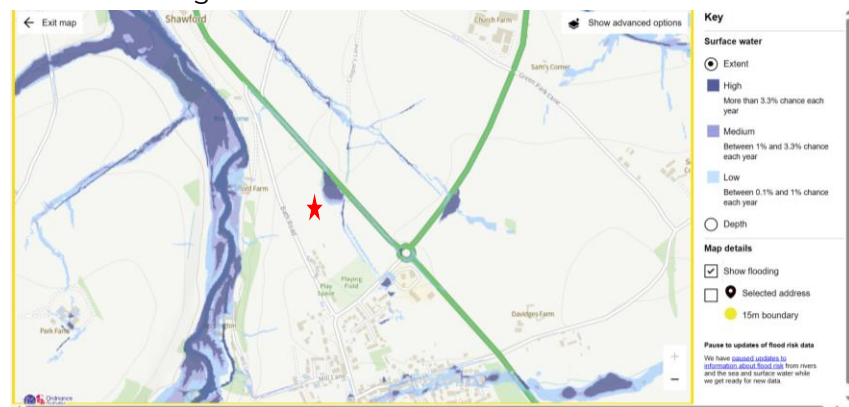
Settlement boundary	 The site lies adjacent to the defined settlement boundary.
Conservation Area	No.
Other landscape Designation/Character Area (please state)	The site lies within National Character Area 117 – Avon Vales and local Landscape Character Assessment (2020) Area B3: <i>Lower Frome Valley Spring Gardens, Beckington to Farleigh Hungerford</i>. Key physical/natural characteristics are defined as: Main river valley; Modest scale river and flood plain landscape; Areas of gently rolling plateau; and Limited woodland cover.
Nature Conservation Designation	Bat Consultation Zone Mells Valley SAC – Band B and C. Vallis Vale (SSSI) Impact Risk Zone.
Listed Buildings within site	N/A
Listed Buildings adjacent to site	None.
Tree Preservation Order	No TPOs found on the Mendip online database.
Flood Zone	The site is in Flood Zone 1 - lowest probability of flood risk from rivers and seas (EA Flood map for Planning mapping extract

below).



Surface Water Flooding

Low chance of surface water flooding at the site. However MENDIP interactive mapping (extract below) shows a scattered medium to high risk area at the northeastern corner.



The 2023 SHELAA reports significant issues with drainage capacity in the village (runoff/foul and surface water connections).

Public Rights of Way



PROW route FR1/1 runs through the site.

Planning History

None.

Other designations affecting site (local plan)

N/A

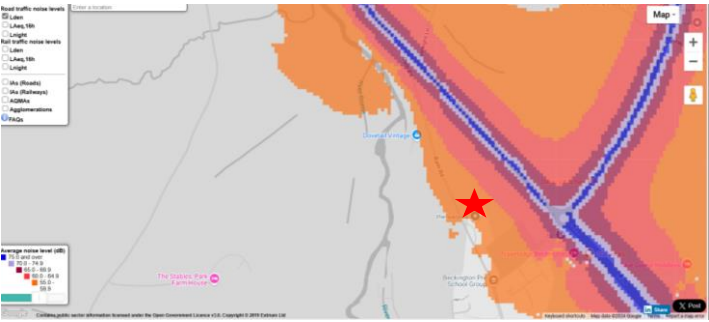
Agricultural Grade

The site is classified as Grade 3a agricultural land as shown in dark green on MAGIC mapping extract below.



Site Appraisal

Access to Site	Access would be served from the Bath Road to the west as shown on the site layout BD2404 02 Concept Masterplan A (see below).
Topography	The site relatively flat – landscape plateau (located at distance from the river valley edge). 
Views into the site	Public vantage from the Bath Road and FP 1/1.
Views out of the site	Wide ranging views to the north and the west.
Vegetation	A 'gappy' hedgerow forms the western site boundary along the Bath Road. Worthy of particular note is the tree belt that forms the eastern site boundary and provides a valuable landscape feature and green corridor/network for biodiversity.
Hydrological features	The submission documents detail an existing watercourse located just to the east of the site. This watercourse is culverted beneath the A36 and flows northward.
Other on-site features	N/A
Signs of contamination?	Not evident
Current use of site	Agriculture.
Any known previous use?	Agriculture.
Utilities on site?	Unknown.
Character of Area	Open countryside – agricultural land.

Neighbouring Land Uses	Residential, community – outdoor children's playground, village hall, outdoor recreation/sports field.
Design Layout Issues	The impact of road noise should be considered especially towards the northeastern most part of the site (nearest the A36) – see mapping extract below. 
Height and character of surrounding buildings	Single and two-storey buildings of various architectural age and styles.

Availability

Ownership	[REDACTED]
Owner supportive of development?	Yes.
Time frame in which site could be developed	Available immediately.

Development Potential

Is the site considered appropriate for development?	Potentially.
Can the entire site be developed?	Further consideration and assessment of road noise from the A36 is required. The northeastern part of the site could potentially be highly constrained by noise pollution thereby limiting or precluding development on this part of the site. If noise mitigation was required, this would need to be sensitively considered given the potential for landscape impact. For example, a high acoustic fence may appear incongruous. The hedgerow/tree belt along the northeast boundary should be protected and enhanced as part of any development proposal.

Potential Development	
Residential	
Any known developer interest?	Unknown at this stage.
Local Opinion (questionnaire responses)	N/A

Suitability

Which category does this site fall into? Please give reasons for your choice (what are the problems if any) 1. Inappropriate 2. Significant constraints 3. Minor constraints 4. Unconstrained

Assessment conclusions

Site Available	Yes
Site Suitable	Minor constraints.
Site Achievable	Potentially.
Conclusion Although the site is located on the landscape plateau (set back from the river valley edge) and is open in character, it is considered relatively discreet in terms of landscape impact given its siting on lower lying land in the context of the surrounding undulating landform. The surrounding landform rises up to the northeast towards the A36 and falls steeply further to the west. Development on this site would elongate the form of the settlement. Nevertheless, growth along roads is evident in the local area and any new development on this site would be seen within the context of the existing settlement when viewed from the north. A strong defensible landscape buffer along the northern site boundary would act to help assimilate development of this site with its surrounds and create the opportunity to enhance the local biodiversity network by linking into the existing hedgerow/tree belt along its eastern boundary. It should be noted the existing hedgerow/tree belt is an important landscape feature and should be retained and reinforced to screen the site in transient views from the A36. Moreover, the settlement is highly constrained by landscape and heritage considerations to the west southwest	

and physically constrained to the northeast by the main A36 limiting opportunity for development should land for the supply of new homes be needed.

Good visibility in both directions appears to be achievable in the provision of a safe and suitable access.

A noise assessment is required to inform the layout of any future development and the need for mitigation.

Consultation with LPA landscape officer, LLHA and LLFA is required if taken forward in the NDP process.

Concept Masterplan submitted: PLEASE NOTE THIS ASSESSMENT REF B_03A_NDP ONLY RELATES TO LAND EAST OF THE BLUE DASHED LINE SHOWN BELOW.



Land off Bath Road, Beckington			BECK029
Town/Parish: Beckington	Division: Frome North	New site	
Site Description / Adjacent Land Uses Greenfield site to the north of Beckington. Bordered on 2 sides by the A36 and Bath Road. Beckington Roundabout adjacent to SE boundary. Surrounded by agricultural and residential land, and a playing field. Highway access assumed to be from Bath Road. Site includes former BECK025 site, put forward in preparation of LPP2 for employment use.			
		© Crown copyright and database rights 2023 Ordnance Survey ACO000861332. Additional Information © Somerset Council	
Proposed Development Total site area - 4.41 Ha (3.76 Ha developable). Proposal - around 84 dwellings (market and affordable) starting 2024-2026.			
Policy Status and Policies Map Designations Adjacent to development limit. No other policy map designations.			
Planning History / SHLAA Status / Eligibility (for permissions) 2017/0818/FUL - Erection of car dealership, a co-working hub and 5 employment starter units. Refused 05/01/2018. Appeal dismissed. BECK025 part of site. 2018/0486/FUL - Erection of car dealership. Refused 13/06/2018. Appeal dismissed. BECK025 part of site. 2022/1153/L7PA - pre-app for 84 dwellings.			
Flood Risk River flooding – Flood Zone 1 Surface water flooding – Area of high risk in the north. Scattered medium & low risk through centre. Significant issues with drainage capacity in the village (runoff/foul and surface water connections).			
Conservation Area / Listed Buildings / Areas of High Archaeological Potential None.			
Designated Landscape No impact on AONB or Special Landscape Features. Landscape Character Area B3: Lower Frome Valley.			
Accessibility			
Corner shop/food shop	141	M&S Simply Food	
Primary school (secondary school)	721	Beckington Church of England First School	
GP Surgery	840	Beckington Family Practice	
Bank/Post Office	1.9km	Rode Post Office	

Settlement Strategy (CP1, CP2)		
3a	Status in adopted settlement hierarchy	Primary Village
	Housing delivery above min requirement	32% growth in stock / 205% above CP2 minimum
	Re-use of land (greenfield/brownfield)	Greenfield (southern 75% of site)
	Relationship to development limit	Adjoining development limit
Site Constraints and characteristics (DP1, DP8, DP21)		
	Physical and infrastructure constraints	None
	Contamination and Ground Conditions	None
	Sewage Treatment Works Buffer Zone	No
	Impact on Minerals and Waste Policies	None
Designated and Priority Habitats (DP5, DP6)		
	RAMSAR Phosphate Mitigation Requirement	Outside catchment area
	Special Areas of Conservation (SAC)	Mells Valley Bats SAC - Band C
	SSSI - Sensitivity to Designated Habitats	Low risk
	Impact on Priority Habitats & Local Wildlife sites	Low
Heritage and Landscape (DP1, DP3, DP4)		
	Impact on heritage assets	None
	Impact on settlement character	Harm would be difficult to mitigate
	Impact on landscape character	Harm would be difficult to mitigate
Highways, Accessibility and Infrastructure		
	Settlement connectivity	Frequent bus service, <5km from Frome
	Education Capacity	No short-term primary school capacity
	Lead Local Flood Authority High Level comments	Potential flooding issues - see Technical Appendix Part 3
	Highways Authority -High Level comments	NOP - but subject to cumulative impacts - see notes
	Cumulative development impacts near site	Highways impact on A36 roundabouts/flood risk
Deliverability		
	Planning Status	None
	Conformity with LLP1/LPP2 policies/allocations	Partly adjacent to DL
	Impact on neighbourhood plans/ other plans	
	Ownership & Availability	Multiple ownership & available
	Marketability	Under option to a developer
	Progress on Phosphate Mitigation Solution	Not applicable
	Impact on A36 Improvements - Policy DP27	Likely development delay or Nat Highways holding objection
	Strategic or Local Risks to delivery	A36 Improvements
Notes		
Highways: due to cumulative effects on A36 roundabouts, even smaller schemes may be subject to a TP requirement that may rule the site out. Policy DP27 financial contributions may also apply. Constraint dependent on progress with Mitigation/Improvement Programme being addressed as part of SGV application - see FRO225a.		
Summary:		

Site Assessment Form

Completed by: WH (BPA)

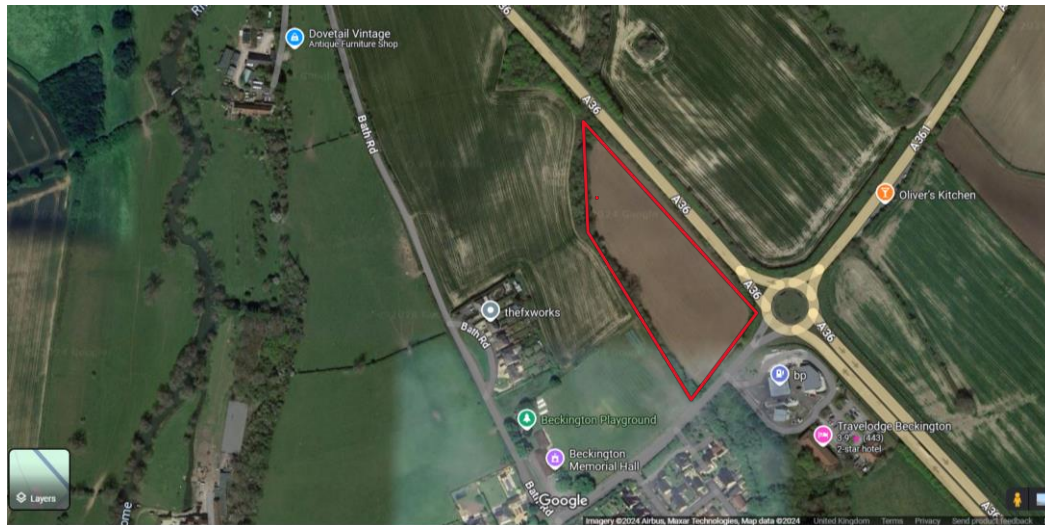
Date: 25th November 2024

Site Name / Ref	BNDP_SA_3b_Land_west_of_A36_A361_Roundabout
------------------------	---

Site Address	Land west of A36/A361 Roundabout, Beckington
---------------------	--

Site Area (hectares)	Approx 1.8 hectares
---------------------------------	---------------------

Description/ Overview



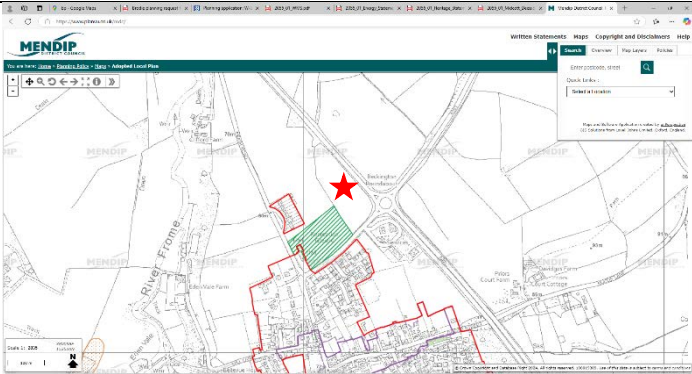
A greenfield site situated to the north of Beckington.

The A36/A361 roundabout is located immediately to the south-east of the site.

Surrounding land uses include agricultural fields to the north-west and north-east, playing fields to the south-west, residential development to the south, and roadside services to the south-east.

This site formed part of the area submitted and assessed under ref 'BECK029' in the SHELAA (2023).

Planning Policy Considerations

Settlement boundary	 The site lies adjacent to the defined settlement boundary.
Conservation Area	No.
Other landscape Designation (please state)	The site lies within National Character Area 117 – Avon Vales and local Landscape Character Assessment (2020) Area B3: Lower Frome Valley Spring Gardens, Beckington to Farleigh Hungerford. Key physical/natural characteristics are defined as: Main river valley; Modest scale river and flood plain landscape; Areas of gently rolling plateau; and Limited woodland cover.
Nature Conservation Designation	Bat Consultation Zone Mells Valley SAC – Band B. Vallis Vale (SSSI) Impact Risk Zone.
Listed Buildings within site	None.
Listed Buildings adjacent to site	None.
Tree Preservation Order	No TPOs found on the Mendip online database. According to the Arboricultural Report submitted with application 2017/0818/FUL, three significant oak trees are located within the hedgerow along the southwestern boundary.
Flood Zone	The site is in Flood Zone 1 – lowest probability of flood risk from rivers and sea – see extract below from EA Flood map for Planning.

	Flood map showing the flood zone your site is in The map shows the flood risk to your site and the surrounding area. 
Surface Water Flooding	 Low chance of surface water flooding at the site however scattered medium and low risk along the western boundary of the site. High chance of flooding due to surface water at the northern boundary of the site. According to the 2023 SHELAA, there are significant issues with drainage capacity in the village (runoff/foul and surface water connections).
Public Rights of Way	PROW route FR1/1 runs alongside the western site boundary.
Planning History	2017/0818/FUL - Erection of car dealership, a co-working hub and 5 employment starter units. Refused 05/01/2018. Appeal dismissed. Summary of reasons for refusal: The site lies in open countryside outside the Settlement Limits of Beckington, where development is strictly controlled as a matter of principle, to ensure a sustainable pattern of development, including proportionate growth; and to ensure unfettered development in the countryside does not undermine its intrinsic value. The proposal has failed to adequately demonstrate that it would sustain the local rural community; be of a manner and scale appropriate to its location and constraints; and that there are no suitable alternative sites that are

	more accessible or sequentially preferable with regard to the Council's spatial strategy. The site lies in open countryside outside the Settlement Limits of Beckington, where development is strictly controlled in the interests of the character and appearance of the countryside. The proposed development due to its urban nature and significant scale, layout and extent, in a prominent position, would cause an unjustified urbanising effect that would encroach into the open countryside and have a harmful impact on the countryside's intrinsic character and appearance. The proposal would result in an unsustainable development due to it fostering a growth in the need to travel by private transport as a result of its unjustified unsustainable location, outside of development limits and inaccessibility to facilities and services and limited alternative modes of transport; and lack of functional links to the nearby village. Summary of reasons for dismissal at appeal: 'The development would cause harm to the character and appearance of the area – relatively inaccessible location.'
Other designations affecting site (local plan)	
Agricultural Grade	The site is classified as Grade 3b agricultural land as shown in dark green in MAGIC mapping extract below. 

Site Appraisal

Access to Site

A36 to Bath

A361 Trowbridge Road

BECKINGTON ROUNDABOUT

A36 to Warminster

Filling Station

Service Area

Link to Beckington Village

Link Duern Close

Site boundary

Existing field access

Access to Roadside Service Area

IMA

TRANSPORT PLANNING

15 WINDSOR SQUARE

BATH, BA1 3DB

01223 444 811

www.ima.co.uk

A36 Site, Beckington

Existing Site & Surroundings

Scale: 1:5000	Drawn: PMS	Revised:
Easting V1.0.0	Design: PMS	Date: Nov 18
IMA-16-074	Plan 2	Rev:

Bath Road, Beckington, Frome

England

Google Street View

Apr 2024

See more dates

Google

Photographic image of existing agricultural access serving the site (and proposed as part of previous application ref 2017/0818/FUL). This is the point of access proposed in the CfS submission.

Topography



Site is relatively flat – landscape plateau set back from the edge of the river valley to the east.

Views into the site

Views off A361 from existing field access:

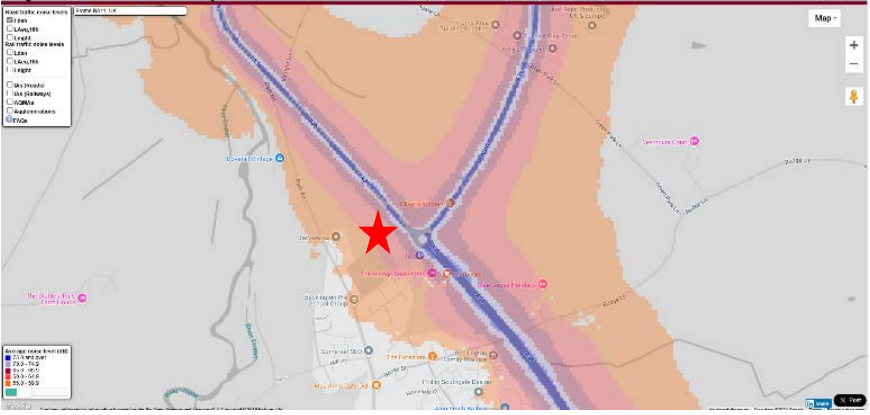




View from A36:



	
Views out of the site	Site enclosed along boundary by planting. However, views out of the site to surrounding land uses are achievable and the adjacent A36.
Vegetation	Substantial mature hedgerow/tree belt forms western site boundary. Intermittent tree planting along the A36.
Hydrological features	The submission documents report an existing watercourse located to the west of the site. This watercourse is culverted beneath the A36 and flows northward
Other on-site features	Substantial mature hedgerow/tree belt forms western site boundary.
Signs of contamination?	None
Current use of site	Agricultural.
Any known previous use?	None.
Utilities on site?	Unknown.
Character of Area	Open countryside – agricultural land.
Neighbouring Land Uses	Community use - outdoor recreation/sports field, commercial, and residential.
Design Layout Issues	The site is constrained by its shape and prominence which gives rise to the question of how road noise would be suitably mitigated and landscape impact reconciled on such a narrow prominent site. High acoustic fencing along the site boundary with the A36 would appear incongruous in the context of the wider open landscape.

	 Additionally, to the north of the site, there is a high chance of surface water flooding. Any development at this site would need to carefully consider the potential impact of road noise on future residents and any resultant impact on landscape character, and address flood risks caused by surface water.
Height and character of surrounding buildings	A variety of one to two-storey buildings.

Availability

Ownership	Unclear – Private landowner/developer
Owner supportive of development?	Yes
Time frame in which site could be developed	1-5 years

Development Potential

Is the site considered appropriate for development?	No. Highly constrained by road noise (A36) and the shape of the site which limits opportunity for mitigation in terms of layout. Prominently located where development would be detrimental to landscape character. Concerns regarding the ability to achieve a safe and suitable access given the proximity of the A36/A361 roundabout and roadside services opposite.
--	--

Can the entire site be developed?	No – as above.
Potential Development N/A	
Any known developer interest?	Unclear – submission documents suggest developer interest.
Local Opinion (questionnaire responses)	N/A

Suitability

Which category does this site fall into? Please give reasons for your choice (what are the problems if any) 1. Inappropriate 2. Significant constraints 3. Minor constraints 4. Unconstrained

Assessment conclusions

Site Available	Yes
Site Suitable	Highly constrained – unsuitable.
Site Achievable	Unlikely
Previous concerns (refusal/dismissal) highlighted the impact on the open countryside and the harm to its character and appearance. The site is highly visible along the A36. There are also significant issues related to noise due to the site's proximity to the road and concerns relating to the provision of a safe and suitable point of access given proximity to the A36 roundabout and services opposite. If progressed as part of the NDP process the LPA landscape officer should be consulted along with the LLHA and LLFA given the known capacity issue of the A36, the proximity of the roundabout and strategic road network services, and the local drainage system.	

Enclosures

Land off Bath Road, Beckington

Town/Parish: Beckington

Division: Frome North

New site

BECK029

Site Description / Adjacent Land Uses

Greenfield site to the north of Beckington. Bordered on 2 sides by the A36 and Bath Road. Beckington Roundabout adjacent to SE boundary. Surrounded by agricultural and residential land, and a playing field. Highway access assumed to be from Bath Road. Site includes former BECK025 site, put forward in preparation of LPP2 for employment use.



© Crown copyright and database rights 2023 Ordnance Survey AC0000861332. Additional Information © Somerset Council

Proposed Development

Total site area - 4.41 Ha (3.76 Ha developable).
Proposal - around 84 dwellings (market and affordable) starting 2024-2026.

Policy Status and Policies Map Designations

Adjacent to development limit.
No other policy map designations.

Planning History / SHLAA Status / Eligibility (for permissions)

2017/0818/FUL - Erection of car dealership, a co-working hub and 5 employment starter units. Refused 05/01/2018. Appeal dismissed. BECK025 part of site.
2018/0486/FUL - Erection of car dealership. Refused 13/06/2018. Appeal dismissed. BECK025 part of site.
2022/1153/L7PA - pre-app for 84 dwellings.

Flood Risk

River flooding – Flood Zone 1
Surface water flooding – Area of high risk in the north. Scattered medium & low risk through centre. Significant issues with drainage capacity in the village (runoff/foul and surface water connections).

Conservation Area / Listed Buildings / Areas of High Archaeological Potential

None.

Designated Landscape

No impact on AONB or Special Landscape Features.
Landscape Character Area B3: Lower Frome Valley.

Accessibility

Corner shop/food shop	141	M&S Simply Food
Primary school (secondary school)	721	Beckington Church of England First School
GP Surgery	840	Beckington Family Practice
Bank/Post Office	1.9km	Rode Post Office
Community hub (pub/hall)	195	Beckington Memorial Hall
Open space (can be provided on site)	15	Playing field adjacent to site
Employment cluster	900m	Frome Road, Rode
Bus stop	273	Bus Stop
Town centre/high order hub	5.27km	Frome

Settlement Strategy (CP1, CP2)

	Status in adopted settlement hierarchy	Primary Village
	Housing delivery above min requirement	32% growth in stock / 205% above CP2 minimum
3a	Re-use of land (greenfield/brownfield)	Greenfield (southern 75% of site)
	Relationship to development limit	Adjoining development limit

Site Constraints and characteristics (DP1, DP8, DP21)

	Physical and infrastructure constraints	None
	Contamination and Ground Conditions	None
	Sewage Treatment Works Buffer Zone	No
	Impact on Minerals and Waste Policies	None

Designated and Priority Habitats (DP5, DP6)

	RAMSAR Phosphate Mitigation Requirement	Outside catchment area
C	Special Areas of Conservation (SAC)	Mells Valley Bats SAC - Band C
	SSSI - Sensitivity to Designated Habitats	Low risk
	Impact on Priority Habitats & Local Wildlife sites	Low

Heritage and Landscape (DP1, DP3, DP4)

	Impact on heritage assets	None
	Impact on settlement character	Harm would be difficult to mitigate
	Impact on landscape character	Harm would be difficult to mitigate

Highways, Accessibility and Infrastructure

	Settlement connectivity	Frequent bus service, <5km from Frome
	Education Capacity	No short-term primary school capacity
	Lead Local Flood Authority High Level comments	Potential flooding issues - see Technical Appendix Part 3
	Highways Authority -High Level comments	NOP - but subject to cumulative impacts - see notes
	Cumulative development impacts near site	Highways impact on A36 roundabouts/flood risk

Deliverability

	Planning Status	None
	Conformity with LLP1/LPP2 policies/allocations	Partly adjacent to DL
	Impact on neighbourhood plans/ other plans	
	Ownership & Availability	Multiple ownership & available
	Marketability	Under option to a developer
	Progress on Phosphate Mitigation Solution	Not applicable
	Impact on A36 Improvements - Policy DP27	Likely development delay or Nat Highways holding objection
	Strategic or Local Risks to delivery	A36 Improvements

Notes

Highways: due to cumulative effects on A36 roundabouts, even smaller schemes may be subject to a TP requirement that may rule the site out. Policy DP27 financial contributions may also apply. Constraint dependent on progress with Mitigation/Improvement Programme being addressed as part of SGV application - see FRO225a.

Summary:

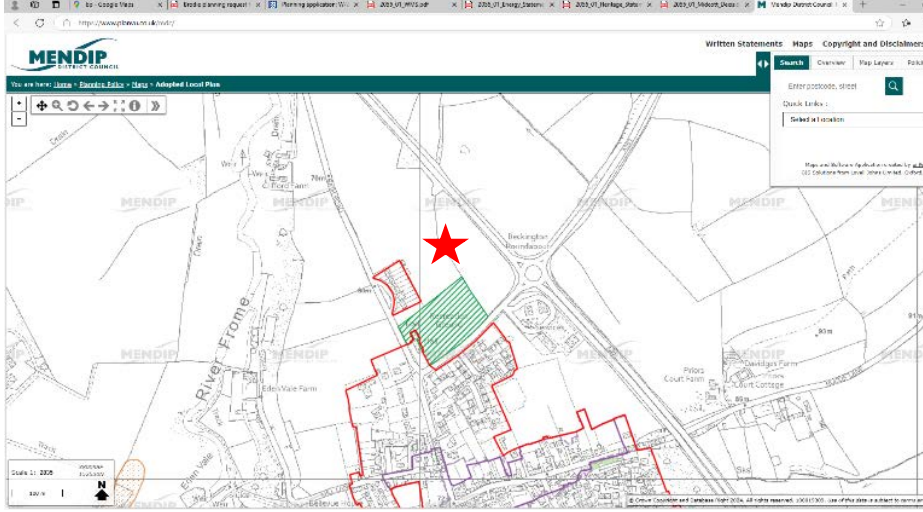
Site is on the edge of a village that has delivered significantly in excess of CP2 requirements. It would impact settlement character, local distinctiveness and landscape character. Site is BMV agricultural land. Education capacity is limited and drainage has been an issue for the village. Financial contributions would be required for the A36 roundabout.

The site is not suitable for allocation.

Site Assessment Form

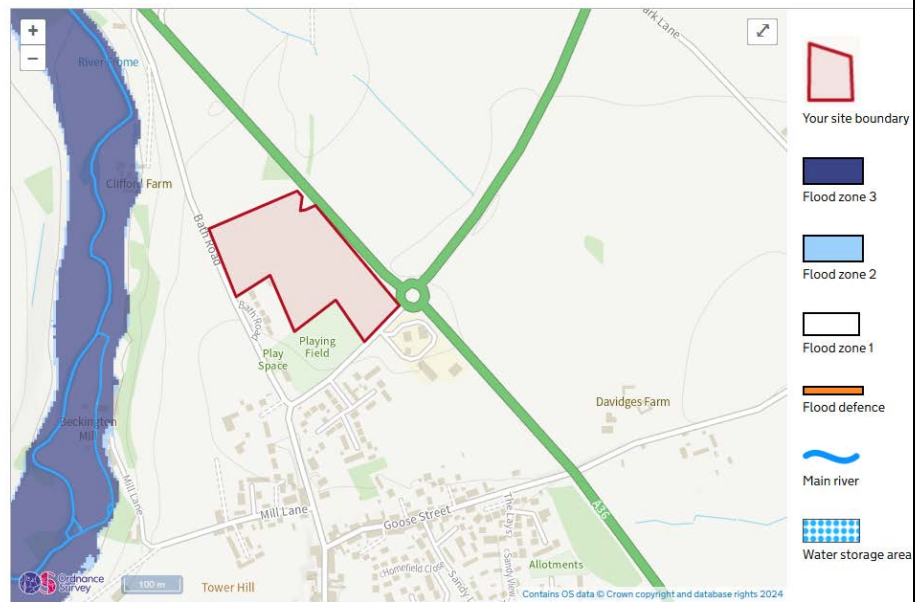
Completed by: WH (BPA)	
Date: 25 th November 2024	
Site Name / Ref	BNDP_SA_3c_Land_off_Bath_Road (comprising site ref BNDP 3a and 3b)
Site Address	Land off Bath Road, Beckington
Site Area (hectares)	4.57 hectares
Description/ Overview	
	
A greenfield site situated to the north of Beckington. The A36 bounds the site to the northeast. Surrounding land uses include agricultural fields to the north and west. Outdoor recreation/sports field to the south, existing residential development to the south, and roadside services to the south-east. This site was submitted and assessed under 'BECK029' in the SHELAA (2023).	

Planning Policy Considerations

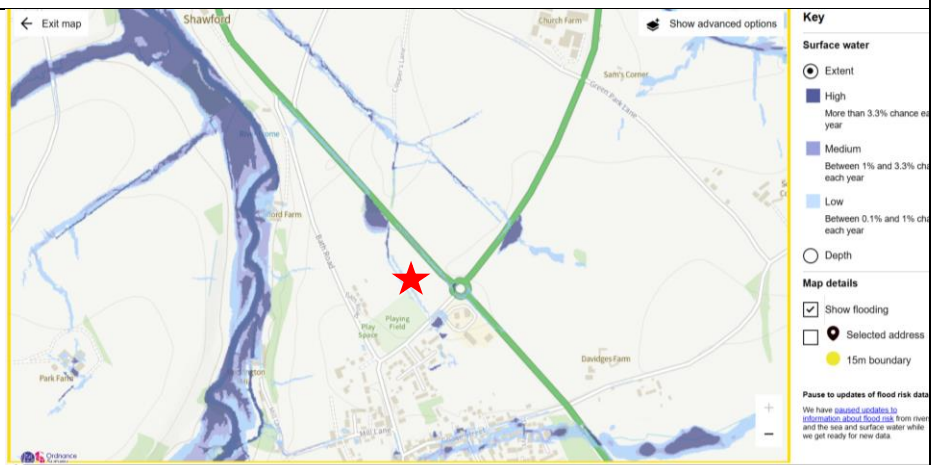
Settlement boundary	 Parts of the site area lie adjacent to the defined settlement boundary.
Conservation Area	No.
Other landscape Designation (please state)	The site lies within National Character Area 117 – Avon Vales and local Landscape Character Assessment (2020) Area B3: Lower Frome Valley Spring Gardens, Beckington to Farleigh Hungerford. Key physical/natural characteristics are defined as: Main river valley; Modest scale river and flood plain landscape; Areas of gently rolling plateau; and Limited woodland cover.
Nature Conservation Designation	Bat Consultation Zone Mells Valley SAC – Band B and C. Vallis Vale (SSSI) Impact Risk Zone.
Listed Buildings within site	None.
Listed Buildings adjacent to site	None.
Tree Preservation Order	No TPOs found on the Mendip online database. According to the Arboricultural Report submitted with application 2017/0818/FUL, three significant oak trees are located within the hedgerow/tree belt that forms the boundary between the two existing fields running centrally through the site area.
Flood Zone	The site is in Flood Zone 1 – lowest probability of flood risk from rivers and sea – see extract below from EA Flood map for Planning.

Flood map showing the flood zone your site is in

The map shows the flood risk to your site and the surrounding area.

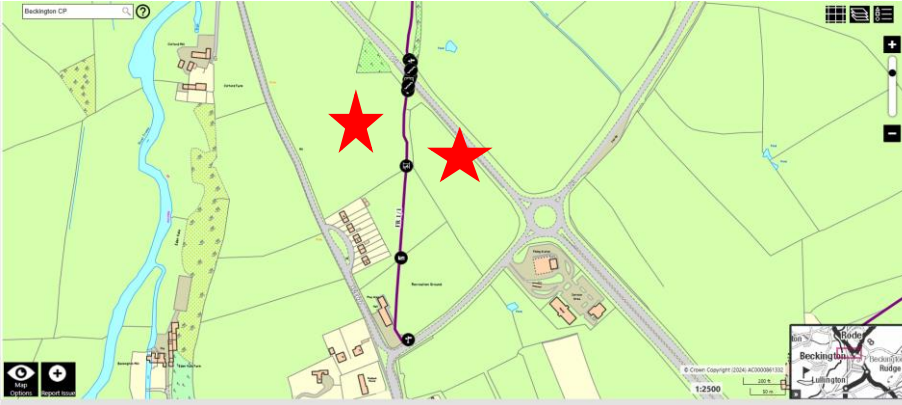


Surface Water Flooding



Scattered low to medium risk along the centre of the site. High chance of flooding due to surface water at the northern boundary of the site as shown on above mapping extract.

According to the 2023 SHELAA, there are significant issues with drainage capacity in the village (runoff/foul and surface water connections).

Public Rights of Way	PROW route FR1/1 runs through the site in a north south direction. 
Planning History	2017/0818/FUL - Erection of car dealership, a co-working hub and 5 employment starter units. Refused 05/01/2018. Appeal dismissed. Summary of reasons for refusal: <i>'The site lies in open countryside outside the Settlement Limits of Beckington, where development is strictly controlled as a matter of principle, to ensure a sustainable pattern of development, including proportionate growth; and to ensure unfettered development in the countryside does not undermine its intrinsic value. The proposal has failed to adequately demonstrate that it would sustain the local rural community; be of a manner and scale appropriate to its location and constraints; and that there are no suitable alternative sites that are more accessible or sequentially preferable with regard to the Council's spatial strategy.'</i> <i>The site lies in open countryside outside the Settlement Limits of Beckington, where development is strictly controlled in the interests of the character and appearance of the countryside. The proposed development due to its urban nature and significant scale, layout and extent, in a prominent position, would cause an unjustified urbanising effect that would encroach into the open countryside and have a harmful impact on the countryside's intrinsic character and appearance.</i> <i>The proposal would result in an unsustainable development due to it fostering a growth in the need to travel by private transport as a result of its unjustified unsustainable location, outside of development limits and inaccessibility to facilities and services and limited alternative modes of transport; and lack of functional links to the nearby village'.</i> Summary of reasons for dismissal at appeal: <i>'The development would cause harm to the character and appearance of the area –inaccessible location.'</i>
Other designations	

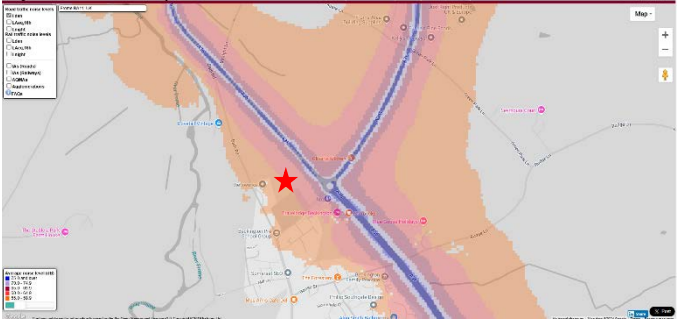
affecting site (local plan)	
Agricultural Grade	The site is classified as Grade 3a agricultural land as shown in dark green on MAGIC mapping extract below. 

Site Appraisal

Access to Site	Access would be served from the Bath Road to the west as shown on the submission document: site layout BD2404 02 Concept Masterplan A (see below).
Topography	 Site is relatively flat – landscape plateau set back from edge of river valley. Land rises gently from Bath Road to A36.
Views into the site	From Bath Road:



	Views from A36: 
Views out of the site	Views of surrounding land uses achievable including passing traffic on the A36. Wide ranging views to the north from Bath Road part of site area.
Vegetation	Substantial mature hedgerow/tree belt forms a central feature dividing the site area. Intermittent tree planting along the A36.
Hydrological features	The submission documents report an existing watercourse located just to the West of the site. This watercourse is culverted beneath the A36 and flows northward
Other on-site features	Substantial mature hedgerow/tree belt forms a central feature dividing the site area.
Signs of contamination?	None

Current use of site	Agricultural.
Any known previous use?	None.
Utilities on site?	Unknown.
Character of Area	Open countryside – agricultural land.
Neighbouring Land Uses	Commercial, community use, outdoor sports field, residential.
Design Layout Issues	 Due to the site's width and its proximity to the road, road noise levels may need to be considered, particularly along the east. Additionally, the northern part of the site is highly susceptible to surface water flooding. Any proposed development must thoughtfully mitigate the potential noise impacts on future residents and address the risks associated with surface water flooding.
Height and character of surrounding buildings	A variety of one to two-storey buildings.

Availability

Ownership	
Owner supportive of development?	Yes
Time frame in which site could be developed	Immediately / 1-5 years

Development Potential

Is the site considered appropriate for development?	No - only part of the site area is considered to have potentially for development - see site assessments re B_03_A_NDP and B_03B_NDP.
Can the entire site be developed?	No - only part of the site area is considered to have potentially for development - see site assessments re B_03_A_NDP and B_03B_NDP.
Potential Development Residential on only part of site area: site ref B_03_A_NDP	
Any known developer interest?	Unknown.
Local Opinion (questionnaire responses)	N/A

Suitability

Which category does this site fall into? Please give reasons for your choice (what are the problems if any) 1. Inappropriate – the site area as assessed under ref B_03_C_NDP (this assessment). 2. Significant constraints 3. Minor constraints 4. Unconstrained
--

Assessment conclusions

Site Available	Yes
Site Suitable	Highly constrained – unsuitable.
Site Achievable	Unlikely
See site assessments under B_03A_NDP and B_03B_NDP. Previous concerns (refusal/dismissal) highlighted the impact on the open countryside and the harm to its character and appearance. The northeastern part of the site is highly exposed and prominent along the A36 causing harm to the character of the landscape and rural setting of the wider settlement.	

Development would lead to a loss of all or part of the mature hedgerow/tree belt that currently divides the site (forms the established field boundary between the two fields). This would have an adverse impact on the natural environment and fail to protect or enhance biodiversity.

Given the proximity of the A36 and lack of any noise assessment there are significant concerns regarding the ability of any development to safeguarding future occupants against noise pollution in an appropriate way without visual detriment to the landscape or setting of the village.

Enclosures



Land off Bath Road, Beckington		BECK029
Town/Parish: Beckington	Division: Frome North	New site
Site Description / Adjacent Land Uses Greenfield site to the north of Beckington. Bordered on 2 sides by the A36 and Bath Road. Beckington Roundabout adjacent to SE boundary. Surrounded by agricultural and residential land, and a playing field. Highway access assumed to be from Bath Road. Site includes former BECK025 site, put forward in preparation of LPP2 for employment use.		
 © Crown copyright and database rights 2023 Ordnance Survey AC0000861332. Additional Information © Somerset Council		
Proposed Development Total site area - 4.41 Ha (3.76 Ha developable). Proposal - around 84 dwellings (market and affordable) starting 2024-2026.		
Policy Status and Policies Map Designations Adjacent to development limit. No other policy map designations.		
Planning History / SHLAA Status / Eligibility (for permissions) 2017/0818/FUL - Erection of car dealership, a co-working hub and 5 employment starter units. Refused 05/01/2018. Appeal dismissed. BECK025 part of site. 2018/0486/FUL - Erection of car dealership. Refused 13/06/2018. Appeal dismissed. BECK025 part of site. 2022/1153/L7PA - pre-app for 84 dwellings.		
Flood Risk River flooding – Flood Zone 1 Surface water flooding – Area of high risk in the north. Scattered medium & low risk through centre. Significant issues with drainage capacity in the village (runoff/foul and surface water connections).		
Conservation Area / Listed Buildings / Areas of High Archaeological Potential None.		
Designated Landscape No impact on AONB or Special Landscape Features. Landscape Character Area B3: Lower Frome Valley.		
Accessibility		
Corner shop/food shop	141	M&S Simply Food
Primary school (secondary school)	721	Beckington Church of England First School
GP Surgery	840	Beckington Family Practice
Bank/Post Office	1.9km	Rode Post Office
Community hub (pub/hall)	195	Beckington Memorial Hall
Open space (can be provided on site)	15	Playing field adjacent to site
Employment cluster	900m	Frome Road, Rode
Bus stop	273	Bus Stop
Town centre/high order hub	5.27km	Frome
Settlement Strategy (CP1, CP2)		
3a	Status in adopted settlement hierarchy	Primary Village
	Housing delivery above min requirement	32% growth in stock / 205% above CP2 minimum
	Re-use of land (greenfield/brownfield)	Greenfield (southern 75% of site)
	Relationship to development limit	Adjoining development limit
Site Constraints and characteristics (DP1, DP8, DP21)		
	Physical and infrastructure constraints	None
	Contamination and Ground Conditions	None
	Sewage Treatment Works Buffer Zone	No
	Impact on Minerals and Waste Policies	None
Designated and Priority Habitats (DP5, DP6)		
C	RAMSAR Phosphate Mitigation Requirement	Outside catchment area
	Special Areas of Conservation (SAC)	Mells Valley Bats SAC - Band C
	SSSI - Sensitivity to Designated Habitats	Low risk
	Impact on Priority Habitats & Local Wildlife sites	Low
Heritage and Landscape (DP1, DP3, DP4)		
	Impact on heritage assets	None
	Impact on settlement character	Harm would be difficult to mitigate
	Impact on landscape character	Harm would be difficult to mitigate
Highways, Accessibility and Infrastructure		
	Settlement connectivity	Frequent bus service, <5km from Frome
	Education Capacity	No short-term primary school capacity
	Lead Local Flood Authority High Level comments	Potential flooding issues - see Technical Appendix Part 3
	Highways Authority -High Level comments	NOP - but subject to cumulative impacts - see notes
	Cumulative development impacts near site	Highways impact on A36 roundabouts/flood risk
Deliverability		
	Planning Status	None
	Conformity with LLP1/LPP2 policies/allocations	Partly adjacent to DL
	Impact on neighbourhood plans/ other plans	
	Ownership & Availability	Multiple ownership & available
	Marketability	Under option to a developer
	Progress on Phosphate Mitigation Solution	Not applicable
	Impact on A36 Improvements - Policy DP27	Likely development delay or Nat Highways holding objection
	Strategic or Local Risks to delivery	A36 Improvements
Notes Highways: due to cumulative effects on A36 roundabouts, even smaller schemes may be subject to a TP requirement that may rule the site out. Policy DP27 financial contributions may also apply. Constraint dependent on progress with Mitigation/Improvement Programme being addressed as part of SGV application - see FRO225a.		
Summary: Site is on the edge of a village that has delivered significantly in excess of CP2 requirements. It would impact settlement character, local distinctiveness and landscape character. Site is BMV agricultural land. Education capacity is limited and drainage has been an issue for the village. Financial contributions would be required for the A36 roundabout.		
The site is not suitable for allocation.		

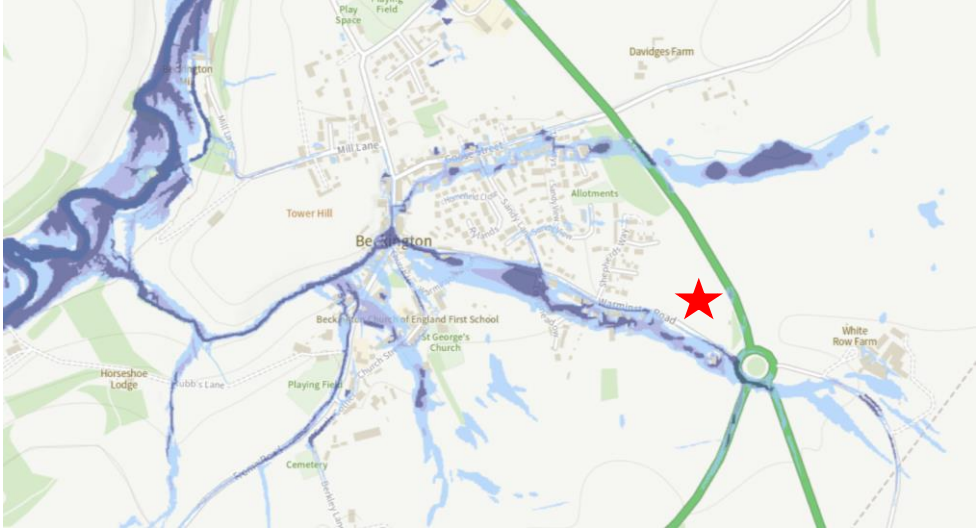
Desk-Based Site Assessment Form

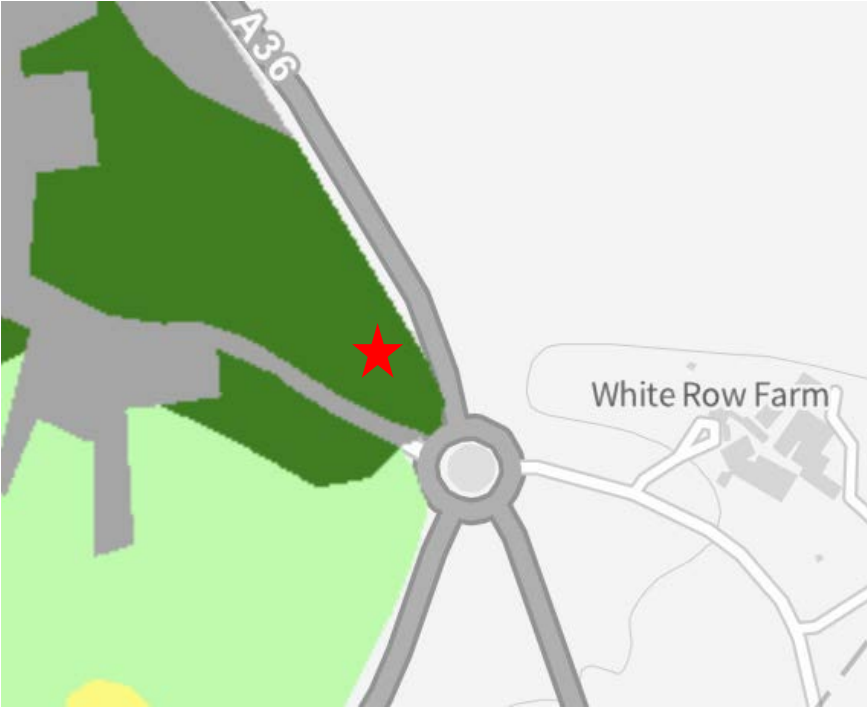
Completed by: WH (BPA)	
Date: 18 th November 2024	
Site Name / Ref	Land between Warminster Road and the A36 BNDP_SA_7_Land_between_Warminster_Road_A36
Site Address	Land between Warminster Road and the A36, Beckington
Site Area (hectares)	3.88 Ha
Description/ Overview This site is located between the existing form of the settlement and the A36. There is a smaller undeveloped land parcel adjoining to the southwest which has also been put forward in the BNDP CfS and been assessed under site ref BNDP_36. Currently in agricultural use. To the northwest of the site is existing residential development. To the southeast an existing tennis sporting facility with protected recreation space. The site was put forward as BECK024 in the SHELAA (2023).	
	

Planning Policy Considerations

Inside Settlement boundary?	The site is located outside but immediately adjacent to the defined development boundary. 
Conservation Area	Outside Beckington Conservation Area. 
Other landscape Designation/ Character Area (please state)	The site lies within National Character Area 117 – Avon Vales and local Landscape Character Assessment (2020) Area B3: <i>Lower Frome Valley Spring Gardens, Beckington to Farleigh Hungerford</i>. Key physical/natural characteristics are defined as: Main river valley; Modest scale river and flood plain landscape; Areas of gently rolling plateau; and Limited woodland cover.
Nature Conservation Designation	Bat Consultation Zone Mells Valley SAC – Band B and C. Vallis Vale (SSSI) Impact Risk Zone.
Listed Buildings within site	No
Listed Buildings adjacent to site	There are 3no. listed buildings to the southwest on the opposite side of the Warminster Road – see HE map extract below. These are: • No.28 (Somerlea), forecourt wall and gate piers, Warminster Road (Grade II Listed Building) • No. 26 Warminster Road (Grade II Listed Building)

	• No. 24 and adjacent garden wall, Warminster Road (Grade II Listed Building) 
Tree Preservation Order	None found on the Somerset Council 'My Mendip' map online.
Flood Zone	The site is within flood zone 1. 
Surface Water Flooding	Surface water flooding – very low risk with some scattered medium to high risk along the road that runs along the southern boundary of the site.

	 Significant issues with drainage capacity in the village (runoff/foul and surface water). Foul flow and flood risk identified as a significant constraint as identified within the sustainability appraisal for sites in Somerset (2024).
Public Rights of Way	An existing public right of way goes through the site, connecting Warminster Road with Goose Street FR1/12 
Planning History	Reference 2020/2298/OTS 2020/2298/OTS – up to 45 dwellings. Refused 16/06/2021. Appeal dismissed. Land North of Warminster Road Beckington Frome Somerset. Application for outline planning permission (all matters reserved except for access) for a development of up to 45 dwellings and associated works. Summary of refusal reasons: Site lies outside of development limits, local housing need being met at district level – disproportionate to the scale of the village. Pressures to do with doctors surgery and school. Harm to the character and appearance of the area and countryside setting of Beckington.

Other designations affecting site (local plan)	N/A
Agricultural Grade	Classified as Grade 3 agricultural land as shown in dark green on MAGIC mapping extract below. 

Site Appraisal

Access to Site	
-----------------------	--

	 The vehicular access proposed to be served from Warminster Road as shown on indicative plan above. The speed of this road is 30mph.
Topography	 The land at the site is relatively flat.
Views into the site	Visible to user of the public footpath and views from the adjacent highway: existing field gate entrance. The site forms part of the gateway to the village when approached from the east.
Views out of the site	Warminster road, A36, adjacent land and residential development at Shepherds Way.
Vegetation	Boundary vegetation/tree line between the site and the A36. Well screened (hedgerow) from Warminster Road.
Hydrological features	None apparent
Other on-site features	N/A

	constitute urban encroachment of housing into the countryside. Additionally, concerns were raised regarding the visual impact and the effect on the character of the landscape. Potentially highly constrained by road noise. Further noise assessment is required. Mitigation may be limited due to the shape and size of the site as well as its prominence within the landscape i.e. the introduction of a high acoustic fence for example may be considered an incongruous feature. More natural measures such as a tree-belt require a greater land area and therefore will impact the developable area.
Can the entire site be developed?	Potentially – see above.
Potential Development Residential.	
Any known developer interest?	Unknown at this stage.

Suitability

Which category does this site fall into? Please give reasons for your choice (what are the problems if any) 1. Inappropriate 2. Significant constraints 3. Minor constraints 4. Unconstrained
--

Assessment conclusions

Site Available	Yes
Site Suitable	Potentially
Site Achievable	Potentially
Conclusion The landowner was written to as part of the assessment process (as information required for assessment not provided in submission) and confirmed that they would be supportive of developing the site and that it is available immediately.	

Previously under application ref 2020/2298/OTS, the LPA have opined that developing this site would result in an urban encroachment of housing into the countryside in a location whereby development of this nature is strictly controlled. At appeal, the inspector raised similar concerns and concerns about the capacity of the primary school and doctors' surgery. Further, the Inspector opined "The proposal would also result in harm to the character and appearance of the area and the countryside setting of Beckington.

Nevertheless, taking into consideration the imminent changes expected in the revised NPPF (changes to housing requirement calculation which will increase requirement) and the district's current under supply of housing (5YHLS) which is at 3.5 years, residential development at the site could potentially be supported subject to suitable noise and landscape impact considerations. A footpath link between the site and the doctor's surgery has been mentioned by the landowner but lacks any detail. This could be a potential benefit. The previous appeal proposal included the construction of a 3m acoustic fence along part of the A36. The landscape impact of this structure in this location needs further consideration and should this site be taken forward to the next stage of the NDP process consultation with the LPA's landscape officer is required.

Given known capacity issues with the A36 the Local Lead Highway Authority (LLHA) need to be consulted should this site be considered further in the NDP process.

Capacity of drainage systems is also a known local issue which will need further consultation with the Local Lead Flood Authority (LLFA).

Enclosures

Land between Warminster Road and the A36 Bypass		BECK024																											
Town/Parish: Beckington	Division: Frome North	Re-promoted																											
Site Description / Adjacent Land Uses Long strip of greenfield land, running alongside the A36, to the SE of Beckington. Surrounded by residential and agricultural land. Borders Warminster Road to the south. Highway access proposed off Warminster Road.																													
		© Crown copyright and database rights 2023 Ordnance Survey AC0000861332. Additional Information © Somerset Council																											
Proposed Development Total site area - 3.88 Ha (all developable). Proposal - up to 45 residential dwellings (including 30% affordable), vehicular access, car parking, landscaping and open space starting 2024-2026.																													
Policy Status and Policies Map Designations Adjacent to development limit. No other policy map designations.																													
Planning History / SHLAA Status / Eligibility (for permissions) 2020/2298/OTS – up to 45 dwellings. Refused 16/06/2021. Appeal dismissed.																													
Flood Risk River flooding – Flood Zone 1. Surface water flooding – very low risk. Significant issues with drainage capacity in the village (runoff/foul and surface water).																													
Conservation Area / Listed Buildings / Areas of High Archaeological Potential Conservation Area: Adjacent to Beckington Conservation Area. Listed Buildings: Several in close proximity. AHAP: Adjacent.																													
Designated Landscape No impact on AONB or Special Landscape Features. Landscape Character Area B3: Lower Frome Valley.																													
Accessibility <table><tr><td>Corner shop/food shop</td><td>920m</td><td>M&S Simply Food</td></tr><tr><td>Primary school (secondary school)</td><td>778m</td><td>Beckington Church of England First School</td></tr><tr><td>GP Surgery</td><td>60m</td><td>Beckington Family Practice</td></tr><tr><td>Bank/Post Office</td><td>3.15km</td><td>Rode Post Office</td></tr><tr><td>Community hub (pub/hall)</td><td>584</td><td>Woolpack Pub</td></tr><tr><td>Open space (can be provided on site)</td><td>790m</td><td>Beckington play park</td></tr><tr><td>Employment cluster</td><td>1.5km</td><td>Frome Road, Rode</td></tr><tr><td>Bus stop</td><td>653</td><td>Bus Stop</td></tr><tr><td>Town centre/high order hub</td><td>5.17km</td><td>Frome</td></tr></table>			Corner shop/food shop	920m	M&S Simply Food	Primary school (secondary school)	778m	Beckington Church of England First School	GP Surgery	60m	Beckington Family Practice	Bank/Post Office	3.15km	Rode Post Office	Community hub (pub/hall)	584	Woolpack Pub	Open space (can be provided on site)	790m	Beckington play park	Employment cluster	1.5km	Frome Road, Rode	Bus stop	653	Bus Stop	Town centre/high order hub	5.17km	Frome
Corner shop/food shop	920m	M&S Simply Food																											
Primary school (secondary school)	778m	Beckington Church of England First School																											
GP Surgery	60m	Beckington Family Practice																											
Bank/Post Office	3.15km	Rode Post Office																											
Community hub (pub/hall)	584	Woolpack Pub																											
Open space (can be provided on site)	790m	Beckington play park																											
Employment cluster	1.5km	Frome Road, Rode																											
Bus stop	653	Bus Stop																											
Town centre/high order hub	5.17km	Frome																											
Settlement Strategy (CP1, CP2) <table><tr><td>Status in adopted settlement hierarchy</td><td>Primary Village</td></tr><tr><td>Housing delivery above min requirement</td><td>32% growth in stock / 205% above CP2 minimum</td></tr><tr><td>3a Re-use of land (greenfield/brownfield)</td><td>Greenfield</td></tr><tr><td>Relationship to development limit</td><td>Adjoining development limit</td></tr></table>			Status in adopted settlement hierarchy	Primary Village	Housing delivery above min requirement	32% growth in stock / 205% above CP2 minimum	3a Re-use of land (greenfield/brownfield)	Greenfield	Relationship to development limit	Adjoining development limit																			
Status in adopted settlement hierarchy	Primary Village																												
Housing delivery above min requirement	32% growth in stock / 205% above CP2 minimum																												
3a Re-use of land (greenfield/brownfield)	Greenfield																												
Relationship to development limit	Adjoining development limit																												
Site Constraints and characteristics (DP1, DP8, DP21) <table><tr><td>Physical and infrastructure constraints</td><td>Some - telegraph poles and overhead lines</td></tr><tr><td>Contamination and Ground Conditions</td><td>None</td></tr><tr><td>Sewage Treatment Works Buffer Zone</td><td>No</td></tr><tr><td>Impact on Minerals and Waste Policies</td><td>None</td></tr></table>			Physical and infrastructure constraints	Some - telegraph poles and overhead lines	Contamination and Ground Conditions	None	Sewage Treatment Works Buffer Zone	No	Impact on Minerals and Waste Policies	None																			
Physical and infrastructure constraints	Some - telegraph poles and overhead lines																												
Contamination and Ground Conditions	None																												
Sewage Treatment Works Buffer Zone	No																												
Impact on Minerals and Waste Policies	None																												
Designated and Priority Habitats (DP5, DP6) <table><tr><td>RAMSAR Phosphate Mitigation Requirement</td><td>Outside catchment area</td></tr><tr><td>C Special Areas of Conservation (SAC)</td><td>Mells Valley Bats SAC - Band C</td></tr><tr><td>SSSI - Sensitivity to Designated Habitats</td><td>Low risk</td></tr><tr><td>Impact on Priority Habitats & Local Wildlife sites</td><td>Low</td></tr></table>			RAMSAR Phosphate Mitigation Requirement	Outside catchment area	C Special Areas of Conservation (SAC)	Mells Valley Bats SAC - Band C	SSSI - Sensitivity to Designated Habitats	Low risk	Impact on Priority Habitats & Local Wildlife sites	Low																			
RAMSAR Phosphate Mitigation Requirement	Outside catchment area																												
C Special Areas of Conservation (SAC)	Mells Valley Bats SAC - Band C																												
SSSI - Sensitivity to Designated Habitats	Low risk																												
Impact on Priority Habitats & Local Wildlife sites	Low																												
Heritage and Landscape (DP1, DP3, DP4) <table><tr><td>Impact on heritage assets</td><td>Adjacent to Beckington Conservation Area & AHAP. Listed buildings in close proximity.</td></tr><tr><td>Impact on settlement character</td><td>Limited harm which could be mitigated</td></tr><tr><td>Impact on landscape character</td><td>Harm which may be capable of mitigation - see appeal</td></tr></table>			Impact on heritage assets	Adjacent to Beckington Conservation Area & AHAP. Listed buildings in close proximity.	Impact on settlement character	Limited harm which could be mitigated	Impact on landscape character	Harm which may be capable of mitigation - see appeal																					
Impact on heritage assets	Adjacent to Beckington Conservation Area & AHAP. Listed buildings in close proximity.																												
Impact on settlement character	Limited harm which could be mitigated																												
Impact on landscape character	Harm which may be capable of mitigation - see appeal																												
Highways, Accessibility and Infrastructure <table><tr><td>Settlement connectivity</td><td>Frequent bus service, <5km from Frome</td></tr><tr><td>Education Capacity</td><td>No short-term primary school capacity</td></tr><tr><td>Lead Local Flood Authority High Level comments</td><td>Potential flooding issues - see Technical Appendix Part 3</td></tr><tr><td>Highways Authority -High Level comments</td><td>NOP - but subject to cumulative impacts - see notes</td></tr><tr><td>Cumulative development impacts near site</td><td>Highways impact on A36 roundabouts/flood risk</td></tr></table>			Settlement connectivity	Frequent bus service, <5km from Frome	Education Capacity	No short-term primary school capacity	Lead Local Flood Authority High Level comments	Potential flooding issues - see Technical Appendix Part 3	Highways Authority -High Level comments	NOP - but subject to cumulative impacts - see notes	Cumulative development impacts near site	Highways impact on A36 roundabouts/flood risk																	
Settlement connectivity	Frequent bus service, <5km from Frome																												
Education Capacity	No short-term primary school capacity																												
Lead Local Flood Authority High Level comments	Potential flooding issues - see Technical Appendix Part 3																												
Highways Authority -High Level comments	NOP - but subject to cumulative impacts - see notes																												
Cumulative development impacts near site	Highways impact on A36 roundabouts/flood risk																												
Deliverability <table><tr><td>Planning Status</td><td>2020/2298/OTS dismissed 20.10.22</td></tr><tr><td>Conformity with LLP1/LPP2 policies/allocations</td><td>Outside but adjacent to DL</td></tr><tr><td>Impact on neighbourhood plans/ other plans</td><td></td></tr><tr><td>Ownership & Availability</td><td>Multiple ownership & available</td></tr><tr><td>Marketability</td><td>Under option to a developer</td></tr><tr><td>Progress on Phosphate Mitigation Solution</td><td>Not applicable</td></tr><tr><td>Impact on A36 Improvements - Policy DP27</td><td>Likely development delay or Nat Highways holding objection</td></tr><tr><td>Strategic or Local Risks to delivery</td><td>A36 Improvements</td></tr></table>			Planning Status	2020/2298/OTS dismissed 20.10.22	Conformity with LLP1/LPP2 policies/allocations	Outside but adjacent to DL	Impact on neighbourhood plans/ other plans		Ownership & Availability	Multiple ownership & available	Marketability	Under option to a developer	Progress on Phosphate Mitigation Solution	Not applicable	Impact on A36 Improvements - Policy DP27	Likely development delay or Nat Highways holding objection	Strategic or Local Risks to delivery	A36 Improvements											
Planning Status	2020/2298/OTS dismissed 20.10.22																												
Conformity with LLP1/LPP2 policies/allocations	Outside but adjacent to DL																												
Impact on neighbourhood plans/ other plans																													
Ownership & Availability	Multiple ownership & available																												
Marketability	Under option to a developer																												
Progress on Phosphate Mitigation Solution	Not applicable																												
Impact on A36 Improvements - Policy DP27	Likely development delay or Nat Highways holding objection																												
Strategic or Local Risks to delivery	A36 Improvements																												
Notes Physical and infrastructure constraints: telegraph poles and overhead lines cross the southern half of the site from east to west. Flooding, drainage, highways, landscape and other issues covered in appeal decision APP/Q3305/W/21/3288474. Highways: due to cumulative effects on A36 roundabouts, even smaller schemes may be subject to a TP requirement that may rule the site out. Policy DP27 financial contributions will apply. Constraint dependent on progress with Mitigation/Improvement Programme being addressed as part of SGV application - see FRO225a.																													
Summary: Site is on the edge of a village that has delivered significantly in excess of CP2 requirements. It is BMV agricultural land. Education capacity is limited and drainage has been an issue for the village. Financial contributions would be required for the A36 roundabout. The site is not suitable for allocation as part of this exercise.																													

Site Assessment Form

Completed by: WH (BPA)

Date: 18th November 2024

Site Name / Ref	BNDP_SA_36__Land_north_of Warminster Road
Site Address	Land north of Warminster Road, Beckington, BA11 6SY
Site Area (hectares)	0.62 ha

Description/ Overview



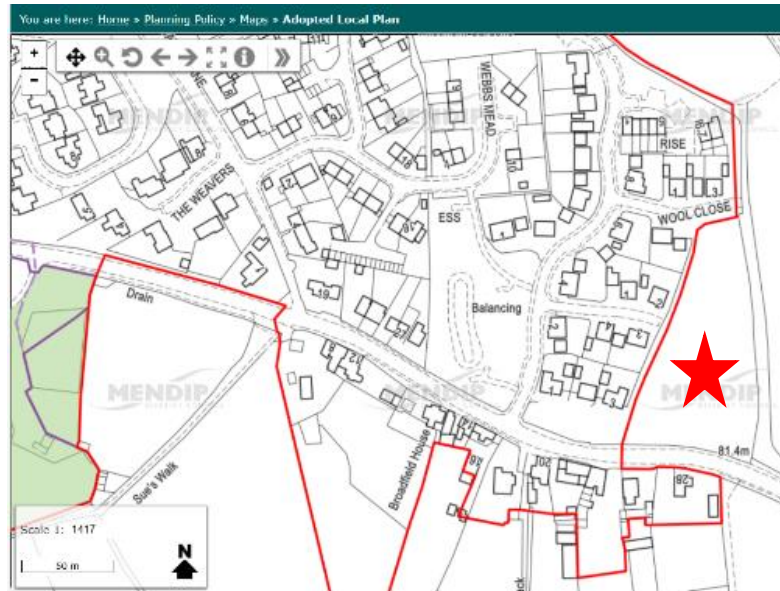
The site lies on the eastern edge of the settlement served off the Warminster Road via a field gate. The site adjoins the existing built form of the settlement along its northern and western boundaries.

A number of designated heritage assets are located on the opposite side of the Warminster Road.

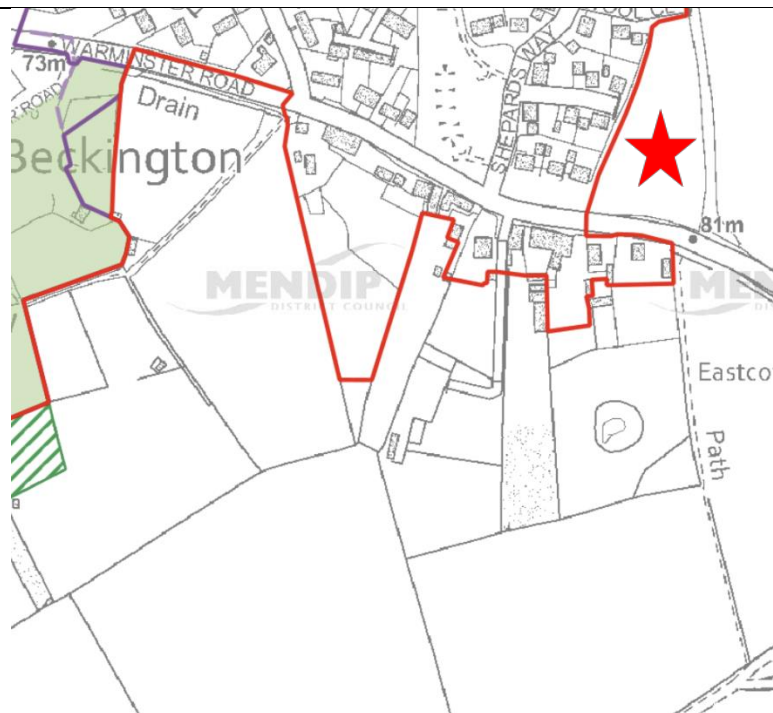
Planning Policy Considerations

Settlement boundary

Although the site is outside of the settlement boundary it lies directly adjacent – see Mendip interactive mapping extract below.



Conservation Area



The site lies outside of the Beckington Conservation Area – the boundary of conservation area is shown by the purple line in the mapping extract above.

Landscape Designation or Character Area (please state)	The site lies within National Character Area 117 – Avon Vales and local Landscape Character Assessment (2020) Area B3: <i>Lower Frome Valley Spring Gardens, Beckington to Farleigh Hungerford</i> . Key physical/natural characteristics are defined as: Main river valley; Modest scale river and flood plain landscape; Areas of gently rolling plateau; and Limited woodland cover.
Nature Conservation Designation	Bat Consultation Zone Mells Valley SAC – Band B and C. Vallis Vale (SSSI) Impact Risk Zone.
Listed Buildings within site	N/A
Listed Buildings adjacent to site	There are 3 no. listed buildings on the opposite side of the Warminster Road – see Historic England mapping extract below. These are: No.24 and Adj Garden Wall – Grade II listed. 26 Warminster Road – Grade II listed. Somerlea, Forecourt Wall and gate Piers – Grade II listed. 
Tree Preservation Order	None within the site area or in proximity (Source: Mendip interactive mapping).

Flood Zone

As shown on above Environment Agency flood risk mapping extract the site is located in Flood Zone 1 which has the lowest probability of flood risk from rivers and seas.

Surface Water Flooding

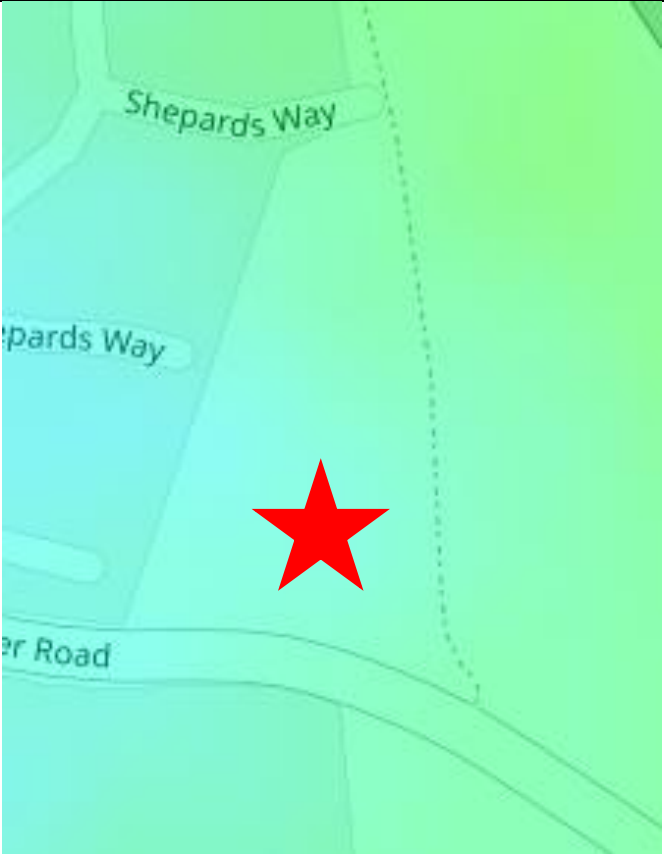
As shown on mapping extract below the site is low risk from surface water flooding. However, surface water flooding is shown to be more of an issue along the Warminster Road.



Public Rights of Way	 PROW footpath ref FR 1/12 runs adjacent to the eastern site boundary in the neighbouring land parcel.
Planning History	There is no planning history detailed on the LPA's online public planning register.
Other designations affecting site (local plan)	N/A
Agricultural Grade	Agricultural land classification 7/Grade 3

Site Appraisal

Access to Site	Existing and proposed access served off Warminster Road. Pavement at frontage providing access to services and facilities in the village centre and beyond (Memorial Hall, outdoor recreation filed for example). Visibility appears good in both directions – LLHA to be consulted if site is progressed in the NDP process.
-----------------------	--

Topography	 Relatively flat with negligible fall southwards towards Warminster Road.
Views into the site	Public vantage of the site frontage is achievable from the Warminster Road. PROW footpath ref FR 1/12 runs adjacent to the eastern site boundary where vantage of the site would be achievable. In terms of an altered or changed experience for the footpath user: the sites eastern boundary follows the route of the footpath for a relatively short extent, is well screened by soft landscaping, and would be 'experienced' in the context of the relatively recent residential development at Shepherds Way.
Views out of the site	The site is bound by the Warminster Road to the south, existing residential development to the north and west. Open countryside/agricultural field lies to the east with A36 beyond.
Vegetation	Grass land. Mature established hedgerow boundaries with hedgerow trees.

Hydrological features	None apparent.
Other on-site features	None apparent.
Signs of contamination?	None evident.
Current use of site	Agriculture – the land is currently overgrown and appears disused for agricultural activities (as observed during site visit dated December 2024).
Any known previous use?	Unknown
Utilities on site?	Unknown
Character of Area	Edge of settlement. Transitional area between settlement and open countryside/agricultural land.
Neighbouring Land Uses	Residential. Agriculture.
Design Layout Issues	Edge of settlement location typically requires a lower density development to denote the transition between built form and open countryside. However, given the attributes and context of the site a standard urban density of 30 dwellings per hectare (dph) is considered achievable subject to other development plan requirements. Building heights to harmonise with surrounding built form.
Height and character of surrounding buildings	Surrounding development comprises predominantly 2-storey buildings. There are a variety of building types from vernacular buildings predominantly constructed using local natural stone to modern buildings with a mix of stone and render.

Availability

Ownership	
Owner supportive of development?	Yes

Time frame in which site could be developed	Immediately
--	-------------

Development Potential

Is the site considered appropriate for development?	Although not technically within the development boundary the site lies directly adjacent and is well related.
Can the entire site be developed?	Yes
Potential Development Residential development	
Any known developer interest?	Unknown
Local Opinion (questionnaire responses)	N/A

Suitability

Which category does this site fall into? Please give reasons for your choice (what are the problems if any) 1. Inappropriate 2. Significant constraints 3. Minor constraints – currently outside defined settlement boundary notwithstanding 5-Yr housing land supply position. 4. Unconstrained

Assessment conclusions

Site Available	Yes
Site Suitable	Yes
Site Achievable	Yes
Conclusion	

The site is located on the edge of the settlement immediate adjacent to recent residential development known as Shepherds Way. The location of this site, although beyond the currently defined development boundary represents a seemingly natural extension to the settlement of Beckington. Suitable for a development of 10-12 houses based on a density of 20 per hectare. A denser development may be possible given the sites context and the need for the efficient use of land.

To summarise, the site is well related to the settlement edge and there would be limited harm in terms of landscape impact to the character of the settlement.

The LLHA and LLFA should be consulted if this site is to be considered further in the NDP process given the known A36 and local drainage capacity issues.

Site Assessment Form

Completed by: WH (BPA)	
Date: 18 th November 2024	
Site Name / Ref	BNDP_SA_82_Land_at_The_Cedars
Site Address	Land at The Cedars, Bath Road, Beckington, Frome, BA11 6SW
Site Area (hectares)	0.39 ha

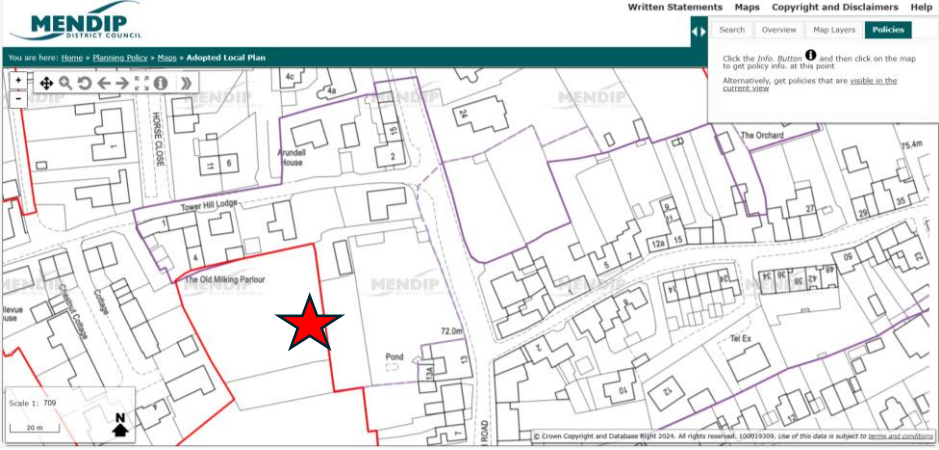
Description/ Overview



This site comprises garden land historically associated with The Cedars (No 13 Bath Road) a Grade II* listed building including garden wall fronting Bath Road. Grade II* listed Gazebo (listed in own right) terminates the garden wall 20 metres north of 13 Bath Road.

Planning Policy Considerations

Settlement boundary	The defined development boundary intersects the site area as shown on the Mendip interactive mapping extract below.
----------------------------	---

	
Conservation Area	 The site lies partially (easternmost extent) within the designated Beckington Conservation Area as shown on the mapping extract above. The above extract also shows Grade II listed buildings coloured purple and Grade II* in blue. The site is located adjacent to an Area of High Archaeological Potential (AHAP DP3) as shown in mapping extract below.

	
Landscape Designation or Character Area (please state)	The site lies within National Character Area 117 – Avon Vales and local Landscape Character Assessment (2020) Area B3: Lower Frome Valley Spring Gardens, Beckington to Farleigh Hungerford. Key physical/natural characteristics are defined as: Main river valley; Modest scale river and flood plain landscape; Areas of gently rolling plateau; and Limited woodland cover.
Nature Conservation Designation	Bat Consultation Zone Mells Valley SAC – Band B. Vallis Vale (SSSI) Impact Risk Zone.
Listed Buildings within site	Immediately adjacent – see Historic England mapping extract below. The site area forms land historically associated with 13 Bath Road (The Cedars), a Grade II* listed building and garden wall, and listed Grade II* Gazebo.

	
Listed Buildings adjacent to site	Grade II* LEN: 1173480 THE CEDARS AND GARDEN WALL, 13, BATH ROAD Grade II* LEN: 1345296 GAZEBO 20 METRES TO NORTH OF NO 13 BATH ROAD

**Tree
Preservation
Order**

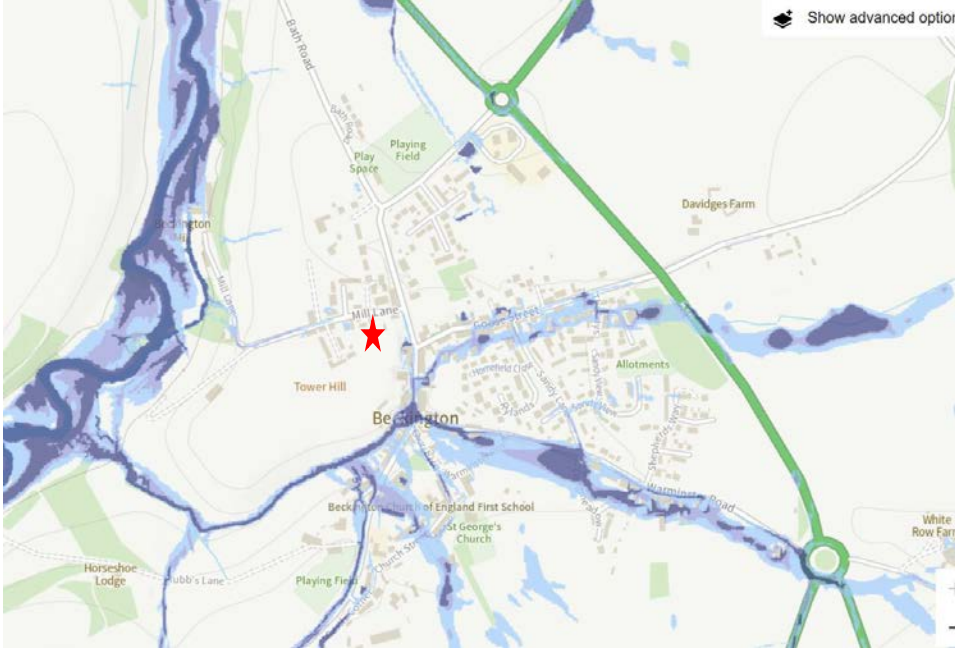


TPO's (group and individual) shown outside the site area along Mill Lane and Bath Road (Source: Mendip interactive mapping).

Flood Zone



The site is located within Flood Zone 1 which has a low probability of flood risk from rivers and seas.

Surface Water Flooding	 The site has a low chance of flooding due to surface water – as shown on mapping extract above (Gov.uk).
Public Rights of Way	No PROW cross the site.
Planning History	See enclosures at end of assessment – Source: LPA public planning register. No relevant planning history.
Other designations affecting site (local plan)	Sewage buffer zone
Agricultural Grade	The site is unclassified as agricultural land given the land lies within the built form of the settlement as shown in MAGIC mapping coloured grey below. 

Site Appraisal

Access to Site	In the correspondence sent by the landowner (architect submission) there were three proposed points of access to the site. 1) Via Valley View (Mill Lane Development) – would need to purchase private land from no.5 and would also require demolition of the garage. 2) Via Tower Hill Lodge Drive – would need to purchase private land and unsure if wide enough. 3) Via existing drive served off Bath Road
Topography	The site is relatively flat and located within the form of the settlement (character defined as undulating landscape plateau). 
Views into the site	The site is enclosed along all boundaries by existing development except the southern extent. Mid-range views of the southern site boundary can be achieved from a number of viewpoints along PROW Path No: FR 1/4 which lies to the south southwest. Some more limited views can be achieved of the southern site boundary from PROW Path No: FR 1/3. All viewpoints are seen within the context of the settlement.
Views out of the site	The site is enclosed by existing development along all boundaries except for the southern boundary. The outlook achieved is over neighbouring fields/open countryside to the south and southwest. Please note this part of the assessment has been desk-based only.
Vegetation	The site was historically utilised as a fruit tree orchard – see historic OS mapping below published

1884 and 1926- Source: The National Library of Scotland (online digital records).



Publication date: 1884



Publication date: 1926

Hydrological features

N/A

Other on-site features

There are multiple trees on the site: a single central tree with a number of trees along north, west and

	southern boundaries. Please note this part of the assessment has been desk-based only.
Signs of contamination?	Unknown: low probability.
Current use of site	Established residential curtilage – garden land associated with The Cedars.
Any known previous use?	Former fruit tree orchard: historic association with The Cedars.
Utilities on site?	Unknown. Central location within settlement therefore assume connection to mains services where available.
Character of Area	Lies within built up area of settlement. Predominantly residential.
Neighbouring Land Uses	Residential
Design Layout Issues	Any development would be required to assess the significance of this land to the setting of the Grade II* listed building and garden wall, and Grade II* listed Gazebo. Interestingly only part of this site lies within the conservation area – why? Was this an intentional decision in defining the boundary? Reasoning not stated in the adopted Conservation Area Appraisal. Access to the site area required to inform. Access to the site was unavailable so no further assessment of this matter can be made. Vehicular access from the Bath Road is of concern in terms of potential vehicle movements and the structural integrity of listed structures namely, the Grade II* listed Gazebo and garden wall.
Height and character of surrounding buildings	The Cedars is a 2.5/three storey building. Later surrounding development is predominantly 2-storey.

Availability

Ownership	██████████
Owner supportive of development?	Yes

Time frame in which site could be developed	Not stated. Architect feasibility study submitted.
--	--

Development Potential

Is the site considered appropriate for development?	Historical assessment is required to understand the significance of this land to the setting of the Grade II* listed building and wall, Grade II* listed Gazebo, and conservation area. The impact of the proposal: change in their setting [listed buildings] and the character and appearance of the conservation area has potential to impact on significance. Further consultation with the LPA conservation team is required to establish if the principle of development is acceptable. Notwithstanding the matter of 'setting', development of this site would erode the plot form which appears from historical mapping to have remained relatively unchanged and thereby dilute the historic understanding of the site within the context of the settlement.
Can the entire site be developed?	Unknown without historic assessment.
Potential Development Unknown	
Any known developer interest?	Unknown
Local Opinion (questionnaire responses)	N/A

Suitability

Which category does this site fall into? Please give reasons for your choice (what are the problems if any) 1. Inappropriate 2. Significant constraints – heritage matters. 3. Minor constraints 4. Unconstrained
--

Assessment conclusions

Site Available	Yes
Site Suitable	Unknown
Site Achievable	Unknown
Conclusion Beckington is identified in the adopted Development Plan as a 'Primary Village' wherein "new development that is tailored to meet local needs will be provided for" (Core Policy 1: Mendip Spatial Strategy). Although the larger part of the site lies outside of the defined development boundary, the eastern part of the site lies within. In terms of landscape impact, the site lies within the existing form of the settlement where any new development would be seen in the context of the settlement especially given the relatively recent neighbouring development of Valley View to the west. To maintain a soft rural settlement edge which is evident along most of the western settlement edge soft landscaping would be required. The impact of a residential proposal on the setting of the Grade II* listed building and wall, Grade II* listed Gazebo and character and appearance of the conservation area are at present largely unknown. However, in my opinion based upon the evidence before me, the proposal would erode the historic plot form and boundaries which have remained unchanged for the past 150 years. The CfS submission fails to consider significance and any resultant harm. Should the proposal amount to less than substantial then this would need to be weighed against public benefit (NPPF, para 215). Given the lack of necessary information and the potential magnitude of this material planning matter (heritage) a concise recommendation cannot be made in terms of progressing the site in the NDP process. Further consultation is required with LPA conservation team. Possible request to landowner to provide Heritage Statement to inform assessment. Consultation with the LPA tree officer is advised along with the LLFA and LLHA given the known capacity issues of the local drainage system and intensification of the existing point of access. In particular the emergence of vehicles and visibility which is restricted by the boundary wall.	

Site Assessment Form

Completed by: WH (BPA)	
Date: 2 nd December 2024	
Site Name / Ref	Land southeast of Great Dunns Close BNDP_SA_84_Land_south_Great_Dunns_Close
Site Address	Land south of Great Dunns Close, Beckington, BA11 6SF
Site Area (hectares)	1.46 Ha
Description/ Overview	

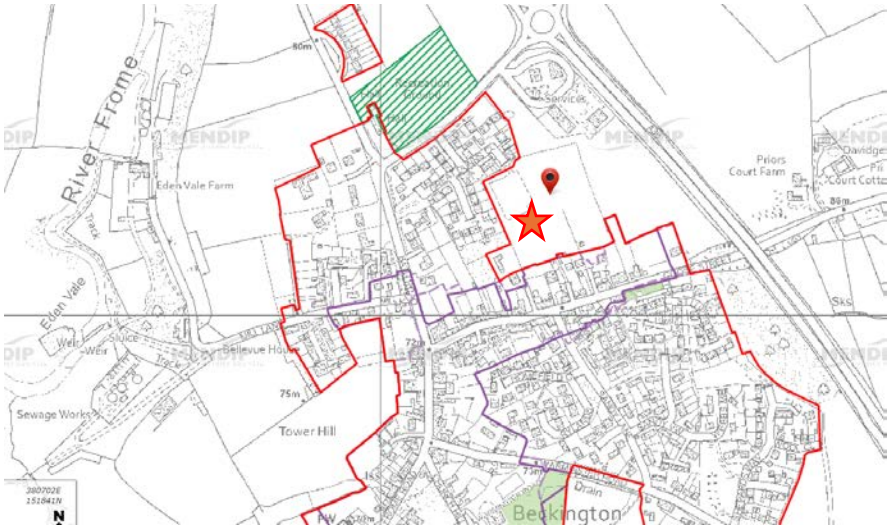
Existing residential development surrounds the site area except to the east where a tract of agricultural land lies in-between the site and the main A36. The existing and proposed site access is via Great Dunns Close to the northwest served off the A361 leading into Beckington village from the A36.

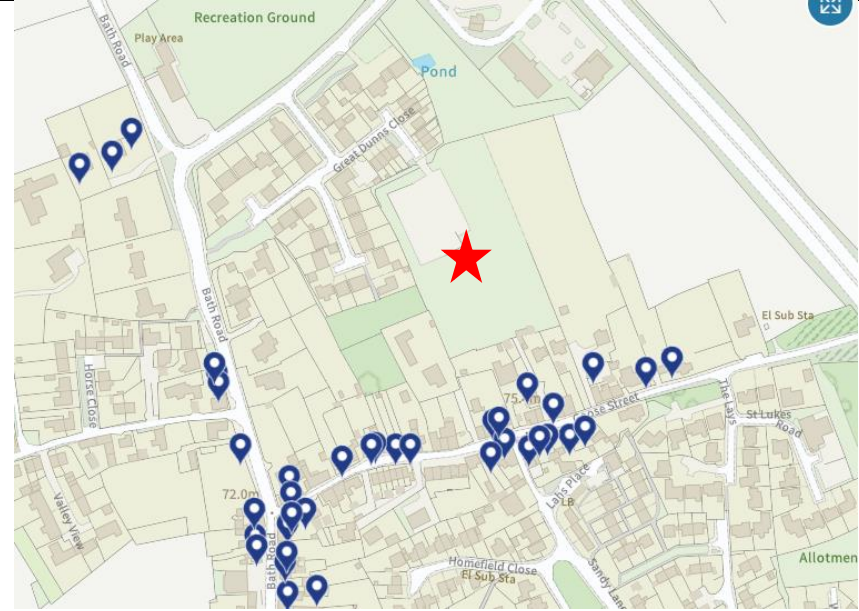
Although historically agricultural grade 3 land, according to the case officer report 2020/1150/FUL, the site was used as a staff and construction compound during the construction of phase 1 of the Redrow development (completed) and the site is now currently fenced off and vacant. This was confirmed during my site visit.

The site was submitted in the 2023 SHELAA under reference BECK023.

Notably, the post-examination version of LPP2 (December 2021) allocated the application site for residential development under Policy BK1. Policy BK1 was deleted from LPP2 in December 2022 following Judicial Review.

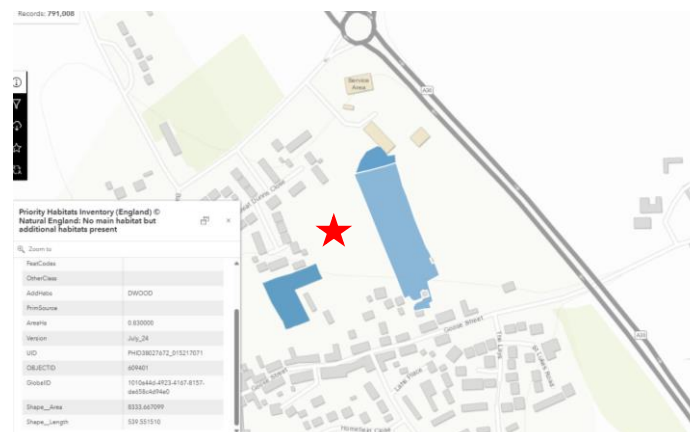
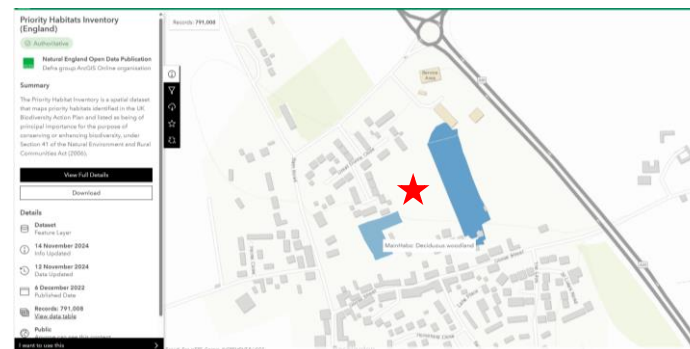
Planning Policy Considerations

Settlement boundary	The site adjoins the defined development boundary - denoted by red line on mapping extract below. 
Conservation Area	The site is located outside of, but immediately adjacent to the northern boundary of the Beckington Conservation Area – shown by purple line in mapping extract below.

	
Landscape Designation or Character Area (please state)	The site lies within National Character Area 117 – Avon Vales and local Landscape Character Assessment (2020) Area B3: Lower Frome Valley Spring Gardens, Beckington to Farleigh Hungerford. Key physical/natural characteristics are defined as: Main river valley; Modest scale river and flood plain landscape; Areas of gently rolling plateau; and Limited woodland cover.
Nature Conservation Designation	Bat Consultation Zone Mells Valley SAC – Band B. Vallis Vale (SSSI) Impact Risk Zone.
Listed Buildings within site	N/A
Listed Buildings adjacent to site	 There are a number of Grade II listed buildings to the south of the site along Goose Street - No.'s 29, 31, 33 and 43 Goose Street, barn 30 metres west of rear of No. 59 Goose Street, Dayton House and Ceomar.

Tree Preservation Order

No TPOs found on the MENDIP map. However, there is a Woodland Priority Habitat adjacent to the east and west of the site.

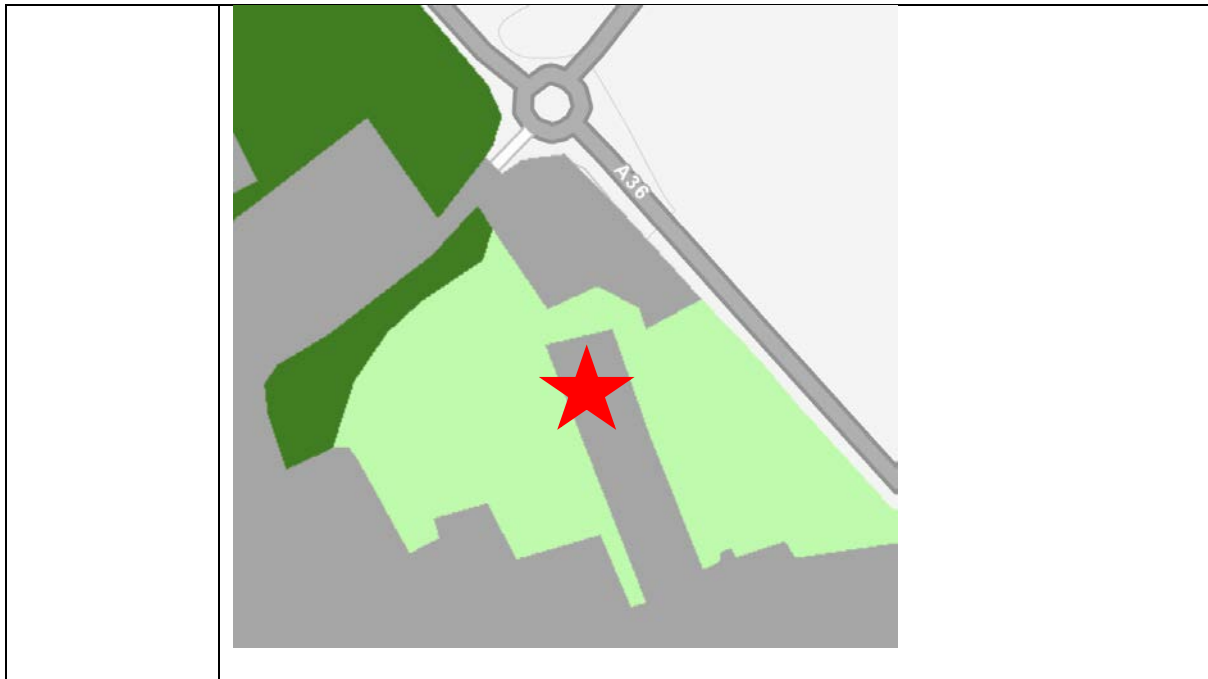


Flood Zone

Flood Zone 1 – Low chance of flooding (Source: EA Flood map for Planning).

	
Surface Water Flooding	Low risk of surface water flooding (Gov.uk). Some medium to high risk to the north of the site. According to the SHELAA and previous case officer reports, there is significant issues with drainage capacity in the village (runoff/foul & surface water). 
Public Rights of Way	There are no PROW crossing or immediately adjacent to the site.

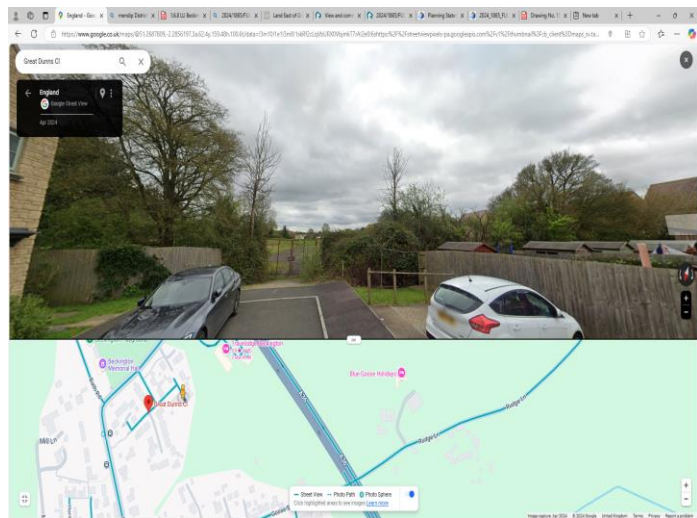
Planning History	2024/1865/FUL - Construction 20 dwellings (including affordable housing) with associated highway access, public open space, landscaping & external works, including demolition of outbuilding & installation of sewage pumping station & electricity sub-station – <u>currently pending consideration</u>. 2020/1150/FUL - 30 dwellings (21 market and 9 affordable) with public open space and other associated infrastructure. Refused and dismissed at appeal. Dismissed due to potential adverse impacts of unsatisfactory drainage considerations. 2017/0278/FUL: A full planning application for the 'Erection of 28 dwellings (19 market, 9 affordable), with public open space and associated infrastructure' was refused for reasons concerning: 1) size and extent which would have a harmful impact on the intrinsic character of the countryside, including listed buildings on Goose Street and the adjacent Conservation Area; 2) adequate arrangements for foul sewage disposal not demonstrated; and, 3) absence of a S106 agreement to secure planning obligations for affordable housing, education, public recreational open space and a Travel Plan. This application was dismissed at appeal on 21 June 2018 (PINS REF. APP/Q3305/W/17/3187245) for being in conflict with the overall strategy 1 of the Local Plan. 2015/2663/FUL: A full planning application for the 'Erection of 36 dwellings (25 market, 11 affordable), with public open space and associated infrastructure' was refused on 8 February 2016 for reasons concerning: 1) size and extent which would have a harmful impact on the intrinsic character of the countryside, including listed buildings on Goose Street and the adjacent Conservation Area; and, 2) absence of a S106 agreement to secure planning obligations for affordable housing, education, public recreational open space and a Travel Plan.
Other designations affecting site (local plan)	N/A
Agricultural Grade	The site comprises unclassified and Grade 3b agricultural land.



Site Appraisal

Access to Site

The site is served via Great Dunns Close to the north off the A361. Image of site entrance below.



Topography	 The site is relatively flat with a slight fall to the southern end of the site.
Views into the site	Site visually contained. Public vantage appears to only be achieved at the site entrance from Great Dunns Close.
Views out of the site	Limited by existing development that surrounds the majority of the site. Transient views might be achievable along the A36. However, these would be glimpses and seen within the context of the settlement.
Vegetation	The site is well screened along the north, west and east boundaries by mature hedgerows and trees.
Hydrological features	N/A
Other on-site features	N/A
Signs of contamination?	Previously used as builders/construction compound so there is potential for ground contamination.
Current use of site	Previously agricultural and then a staff and construction compound. Currently vacant.
Any known previous use?	N/A
Utilities on site?	Unknown. However, given the location of the site immediately adjacent to the settlement mains services should be accessible where available.
Character of Area	Predominantly urban/existing residential development with a tract of enclosed agricultural land to the east. Edge of settlement.
Neighbouring Land Uses	Residential. Agricultural/open green space.
Design Layout Issues	Any development should respect the historic environment (listed buildings and conservation

	area) located largely to the south of the site and safeguard adjoining residential amenities
Height and character of surrounding buildings	Residential area comprising of a predominantly two-storey built form. A variety of building ages from C17 to modern C21.

Availability

Ownership	██████
Owner supportive of development?	Yes
Time frame in which site could be developed	Available immediately.

Development Potential

Is the site considered appropriate for development?	Yes – subject to adequate drainage (previous concern), access and capacity issues (A36) and heritage matters. Given this land/site is not included in the Beckington Conservation Area I can only conclude its not considered of particular significance to the historic agricultural setting of Goose Street and its historic buildings. The character of this land in my opinion is akin to the settlement rather than the agricultural land to the west.
Can the entire site be developed?	Yes.
Potential Development Residential	
Any known developer interest?	“If planning permission is granted, Cotswold Homes has a contract to purchase the site and build out the consented scheme.” – quote taken from email correspondence received from Cotswold Homes.

Suitability

Which category does this site fall into? Please give reasons for your choice (what are the problems if any) 1. Inappropriate
--

~~2. Significant constraints~~

3. Minor constraints

~~4. Unconstrained~~

Assessment conclusions

Site Available	Yes
Site Suitable	Potentially
Site Achievable	Potentially
Conclusion Although the site is outside of the development boundary, it is directly adjacent and well related to the existing form of the settlement. It is also a sustainable site in locational terms. The visual appearance of the site sits comfortably within the form of the existing settlement and is well screened. Previous concerns have been raised concerning surface water and foul drainage, and the capacity of the A36. Should this site been taken forward in the NDP process, the LLHA and LLFA must be consulted so comments on these technical matters can be received. The determination of the current application (ref 2024/1865/FUL) for the construction of 20 dwellings will have a fundamental bearing on if and how this site is progressed in the BNDP process.	

Enclosures

Land off Great Dunns Close, Beckington		BECK023
Town/Parish: Beckington	Division: Frome North	Re-promoted
Site Description / Adjacent Land Uses Greenfield site to the north of Beckington. Surrounded by residential and open space. Highway access via Great Dunns Close.		
 © Crown copyright and database rights 2023 Ordnance Survey AC0000861332. Additional Information © Somerset Council		
Proposed Development Total site area - 1.46 Ha (0.73 Ha developable). Proposal - 30 dwellings (market and affordable) starting 2024-2026.		
Policy Status and Policies Map Designations Adjacent to development limit. No other policy map designations.		
Planning History / SHLAA Status / Eligibility (for permissions) 2020/1150/FUL - 30 dwellings (21 market and 9 affordable) with public open space and other associated infrastructure. Refused 18/10/2021. Appeal dismissed. Quashed allocation BK1 in LPP2.		
Flood Risk River flooding – Flood Zone 1 Surface water flooding - scattered areas of high, medium and low risk. Significant issues with drainage capacity in the village (runoff/foul and surface water).		
Conservation Area / Listed Buildings / Areas of High Archaeological Potential Conservation Area: Adjacent to Beckington Conservation Area. Listed Buildings: In close proximity. AHAP: Adjacent.		
Designated Landscape No impact on AONB or Special Landscape Features. Landscape Character Area B3: Lower Frome Valley.		
Accessibility		
Corner shop/food shop	214	M&S Simply Food
Primary school (secondary school)	666	Beckington Church of England First School
GP Surgery	798	Beckington Family Practice
Bank/Post Office	2.1km	Rode Post Office
Community hub (pub/hall)	141	Beckington Memorial Hall
Open space (can be provided on site)	145	Beckington Playground
Employment cluster	1.4km	Frome Road, Rode
Bus stop	179	Bus Stop
Town centre/high order hub	5.23km	Frome

Settlement Strategy (CP1, CP2)	
Status in adopted settlement hierarchy	Primary Village
Housing delivery above min requirement	32% growth in stock / 205% above CP2 minimum
Re-use of land (greenfield/brownfield)	Greenfield
Relationship to development limit	Adjoining development limit
Site Constraints and characteristics (DP1, DP8, DP21)	
Physical and infrastructure constraints	Generally cleared site/scrubland
Contamination and Ground Conditions	None
Sewage Treatment Works Buffer Zone	No
Impact on Minerals and Waste Policies	None
Designated and Priority Habitats (DP5, DP6)	
RAMSAR Phosphate Mitigation Requirement	Outside catchment area
C Special Areas of Conservation (SAC)	Mells Valley Bats SAC - Band C
SSSI - Sensitivity to Designated Habitats	Low risk
Impact on Priority Habitats & Local Wildlife Sites	Deciduous woodland PH adjacent to E and W
Heritage and Landscape (DP1, DP3, DP4)	
Impact on heritage assets	Harm to CA/listed buildings identified at appeal - see notes
Impact on settlement character	Limited harm which could be mitigated
Impact on landscape character	Limited harm which could be mitigated
Highways, Accessibility and Infrastructure	
Settlement connectivity	Frequent bus service, <5km from Frome
Education Capacity	No short-term primary school capacity
Lead Local Flood Authority High Level comments	Significant constraint - flooding issues - see notes
Highways Authority -High Level comments	NOP - but subject to cumulative impacts - see notes
Cumulative development impacts near site	Highways impact on A36 roundabouts/flood risk
Deliverability	
Planning Status	Appeal dismissed
Conformity with LLP1/LPP2 policies/allocations	Quashed allocation in LPP2 - outside but adjacent to DL
Impact on neighbourhood plans/ other plans	
Ownership & Availability	Single ownership & available
Marketability	Under option to a developer
Progress on Phosphate Mitigation Solution	Not applicable
Impact on A36 Improvements - Policy DP27	Likely development delay or Nat Highways holding objection
Strategic or Local Risks to delivery	Foul and surface water drainage/A36 Improvements
Notes Heritage and flooding position is covered in appeal decision APP/Q3305/W/21/3289537. Highways: site no longer has benefit of allocation and NH position on impact would need to be re-considered. Previous applications confirm Policy DP27 will apply. Deliverability remains subject to addressing cumulative effects on A36 roundabout, subject to a TP requirement. Should the mitigation of the A36 roundabouts currently being worked on by SGV site come forward, these constraints may be removed.	
Summary: Site is on the edge of a village that has delivered significantly in excess of CP2 requirements. Education capacity is limited and drainage has been an issue for the village. It is unclear how this site would provide sufficient sewerage capacity. Financial contributions would be required for the A36 roundabout. The site is not suitable for allocation as part of this exercise.	

Site Assessment Form

Completed by: WH (BPA)	
Date: 17 December 2024	
Site Name / Ref	Land South of Bath Road BNDP_SA_85_Land_south_Bath_Road
Site Address	Land south of Bath Road, BA11 6SF
Site Area (hectares)	2.38 ha
Description/ Overview	
 	
Site location and indicative site layout shown as submitted to Cfs.	

Planning Policy Considerations

Settlement boundary



Majority of the site is immediately adjacent to the defined settlement boundary.

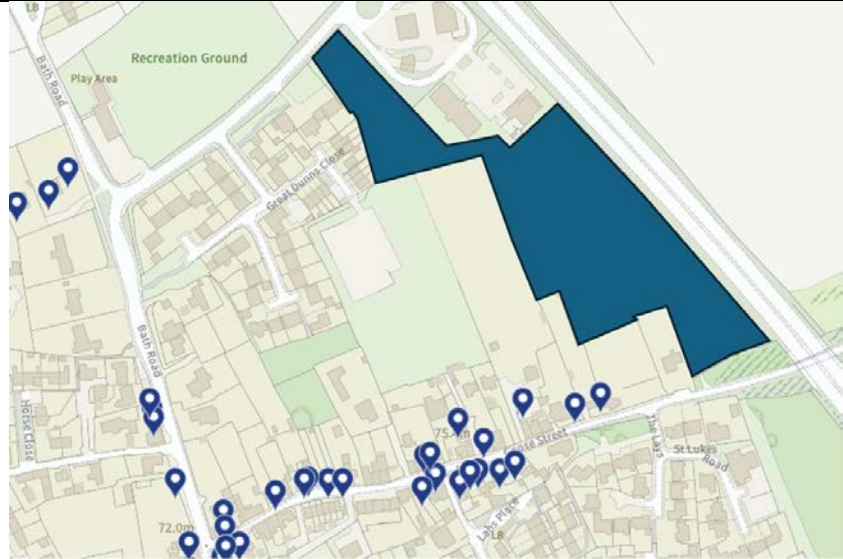
Conservation Area



South-western part of the site is adjacent to the conservation area as shown in 'green' above and a purple line in mapping below.

	
Landscape Designation or Character Area (please state)	The site lies within National Character Area 117 – Avon Vales and local Landscape Character Assessment (2020) Area B3: Lower Frome Valley Spring Gardens, Beckington to Farleigh Hungerford. Key physical/natural characteristics are defined as: Main river valley; Modest scale river and flood plain landscape; Areas of gently rolling plateau; and Limited woodland cover.
Nature Conservation Designation	Bat Consultation Zone Mells Valley SAC – Band B and C. Western part of site falls within Vallis Vale (SSSI) Impact Risk Zone. Woodland Priority Habitat on land to the west and south. Woodland Grant Scheme 2 (England) – Sandy Lane and Rudge.
Listed Buildings within site	None

**Listed Buildings
adjacent to site**



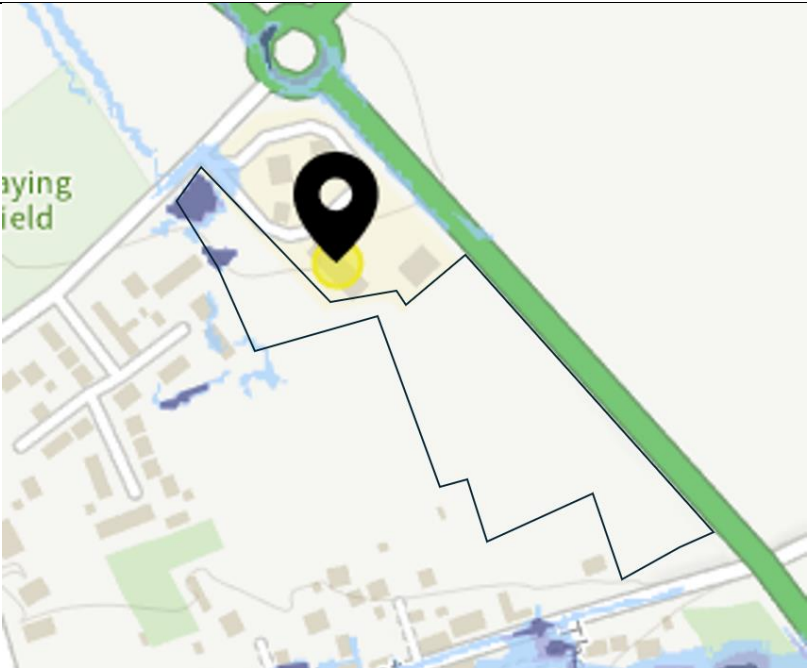
**Tree Preservation
Order**

None shown on Mendip online mapping source.

Flood Zone



The site lies with Flood Zone 1 which has the lowest probability of flooding from rivers and seas (fluvial).

Surface Water Flooding	 High flood risk identified from surface water at site entrance (areas shown in mid and dark blue on above mapping). Consultation with LLFA and LPA drainage officer required should this site be progressed in the NDP process.
Public Rights of Way	None
Planning History	None
Other designations affecting site (local plan)	None
Agricultural Lane Classification Grade	As shown in mapping below, the majority of the site is classified as Grade 3b (coloured light green) with a narrow strip of Grade 3a (coloured dark green) adjacent to Bath Road (proposed point of access).



Site Appraisal

Access to Site



In the correspondence sent by the landowner the proposed access to the site is on the Old A361. This is currently overgrown and is well screened with mature soft landscaping. Giving the proximity of adjacent points of access and A36 roundabout the LLHA should be consulted if this site was progressed in the NDP process.

Topography	 As shown the site has a flat topography type.
Views into the site	 The photo above is taken from the A36 on the east side of the site, as shown during the summer months the site is well screened with mature soft landscaping. The site assessment site visit was undertaken in December when vegetation provided a reduced level of screening albeit the A36 remained relatively well screened in terms of views out.
Views out of the site	The A36 is well screened along the eastern boundary of the site during the summer months. The site assessment site visit was undertaken in December in which the surrounding roads remained relatively well screened during the winter months in terms of views out.
Vegetation	Boundaries well screened by established soft landscaping (mature hedgerows and tree planting).

Hydrological features	 Mapping shows a pond located on the northern part of the site. This water feature has potential hydrological and biodiversity implications.
Other on-site features	None of particular note
Signs of contamination?	None evident – productive agricultural land.
Current use of site	Agriculture
Any known previous use?	As above.
Utilities on site?	Unknown. The site lies immediately adjacent to the eastern settlement edge so it is reasonable to assume utilities will be within close proximity.
Character of Area	Located on undulating land falling away from the landscape plateau and valley side that forms the western settlement edge. For this reason, the eastern side of the settlement is less sensitive to change. Visually and physically enclosed by natural and built features where only local and transient views are available.
Neighbouring Land Uses	Residential, commercial, strategic highway, agriculture.
Design Layout Issues	Highly constrained by road noise. Layout and design will need to be informed by appropriate mitigation measures. A noise assessment could be requested from the landowner/promotor should this site be taken forward in the NDP process.
Height and character of surrounding buildings	Single and 2-storey buildings.

Availability

Ownership	██████
Owner supportive of development?	Yes
Time frame in which site could be developed	Immediately

Development Potential

Is the site considered appropriate for development?	Yes
Can the entire site be developed?	Subject to road noise constraints and achievable point of access.
Potential Development Residential	
Any known developer interest?	To be confirmed.
Local Opinion (questionnaire responses)	N/A

Suitability

Which category does this site fall into? Please give reasons for your choice (what are the problems if any) 1. Inappropriate 2. Significant constraints 3. Minor constraints 4. Unconstrained
--

Assessment conclusions

Site Available	Yes
Site Suitable	Yes potentially
Site Achievable	Yes potentially

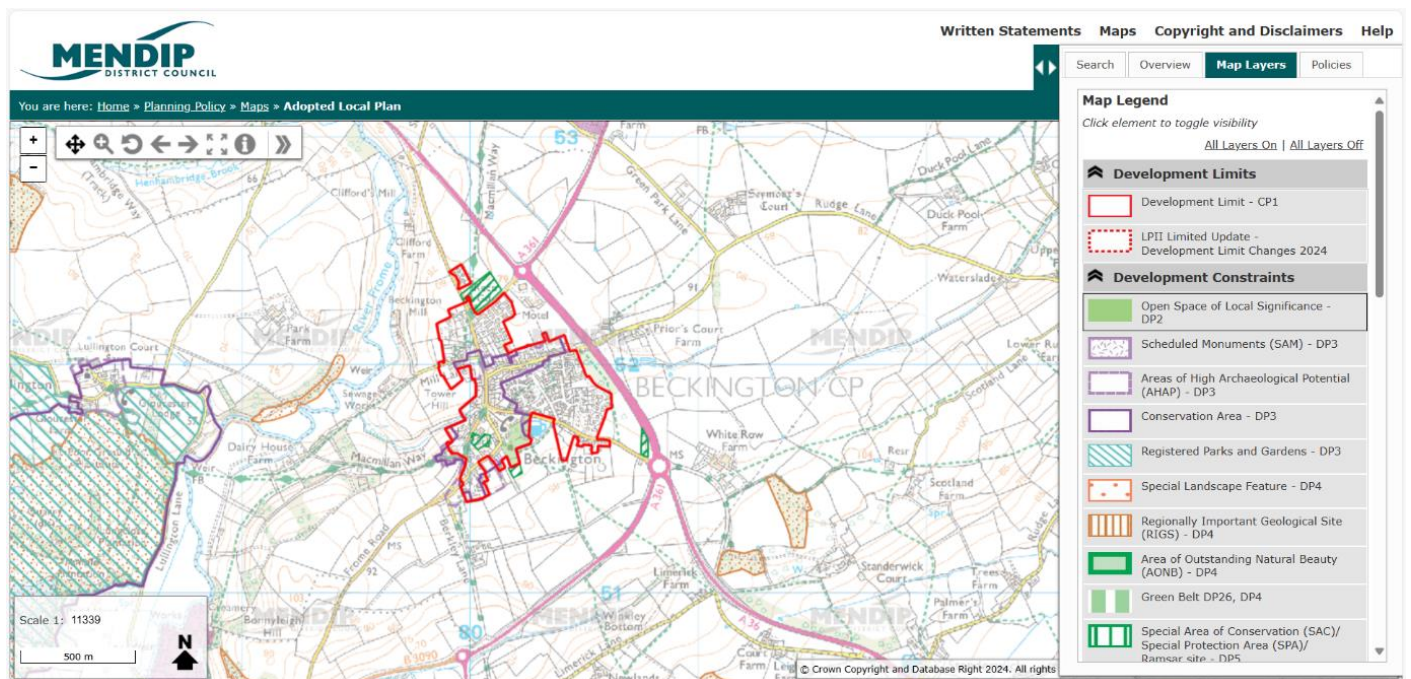
Conclusion

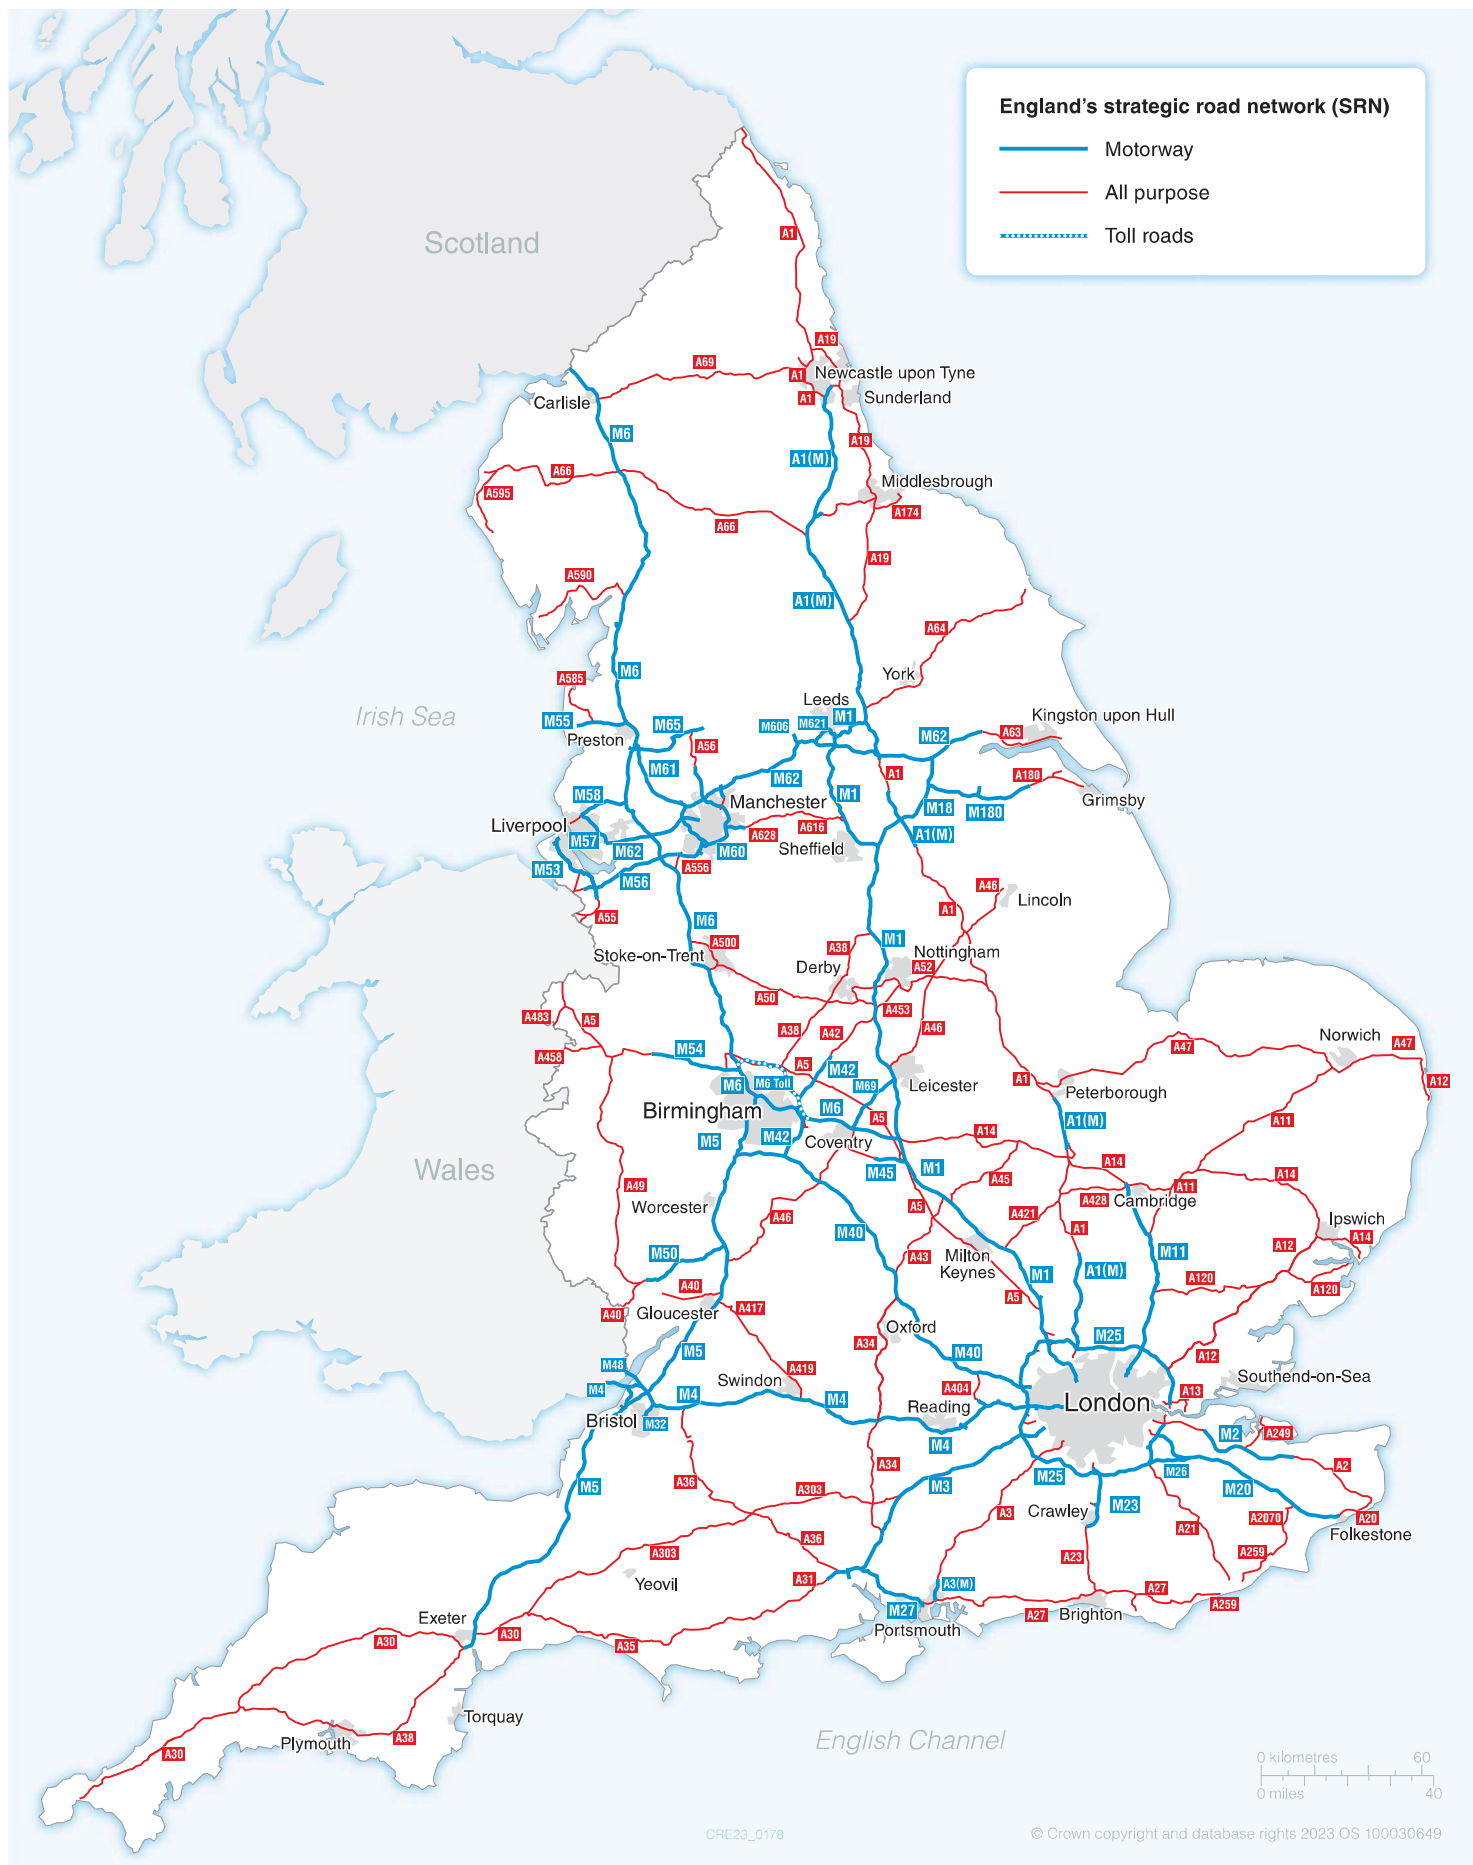
The site is visually and physically contained by natural and built features: landform, mature planting along boundaries, the A36 to the northeast and largely by the settlement to the west. Development here would be well related to the existing settlement and visually discreet within the wider landscape setting. The eastern part of the settlement, which this site forms part of, lies on land characterised as 'landscape plateau'. Unlike the western side of the settlement which lies on the valley edge, this part of the settlement is significantly less sensitive to change and for this reason where new development could be accommodated in purely landscape terms.

Notwithstanding the above, in terms of the site being achievable and deliverable the site is highly constrained by road noise from the A36 and site access from the Bath Road requires expert advice should this site be considered further in the NDP process. Can a suitable point of access be achieved given the identified flood risk from surface water at the proposed point of ingress and exit? For this reason and the known local foul drainage system capacity issues, if the site is to progress in the NDP process, consultation with the LLFA and LPA drainage officer should be undertaken. In addition, the LLHA should be consulted given the proposed entrance lies within immediately proximity to the A36 roundabout and strategic road network services. The National Highways Strategic Road Network map is enclosed below for information purposes. The LPA ecologist should also be consulted on the biodiversity potential of the pond (northern part of the site). To inform these onward consultations the landowner could be requested to provide a Flood Risk Assessment (FRA) and Preliminary Ecology Assessment (PEA).

To note, the submitted indicative layout (copy shown on Description/Overview section above) appears to retain the pond at the northern extent of the site and the built form is concentrated to the western part of the site. This would suggest biodiversity and road noise have been considered in the evolution of the indicative layout. The extent of which is unknown as the appropriate necessary assessments were not mentioned or submitted to accompany. In progressing this site further in the NDP process, the steering group will need to be satisfied that what is shown can suitably mitigate constraints.

Enclosures





Site Assessment Form

Completed by: WH (BPA)

Date: 10th January 2025

Site Name / Ref	SNDP_SA_86_Land_rear_24_Warminster_Road
------------------------	---

Site Address	Land to the rear of 24 Warminster Road, Beckington
---------------------	--

Site Area (hectares)	0.92 ha
-----------------------------	---------

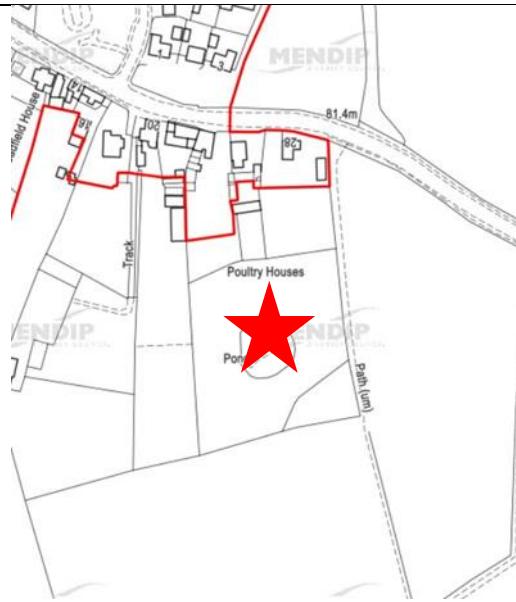
Description/ Overview

The site lies to the rear of 24 Warminster Road. Access off the Warminster Road. Historically used for agriculture (nursery).



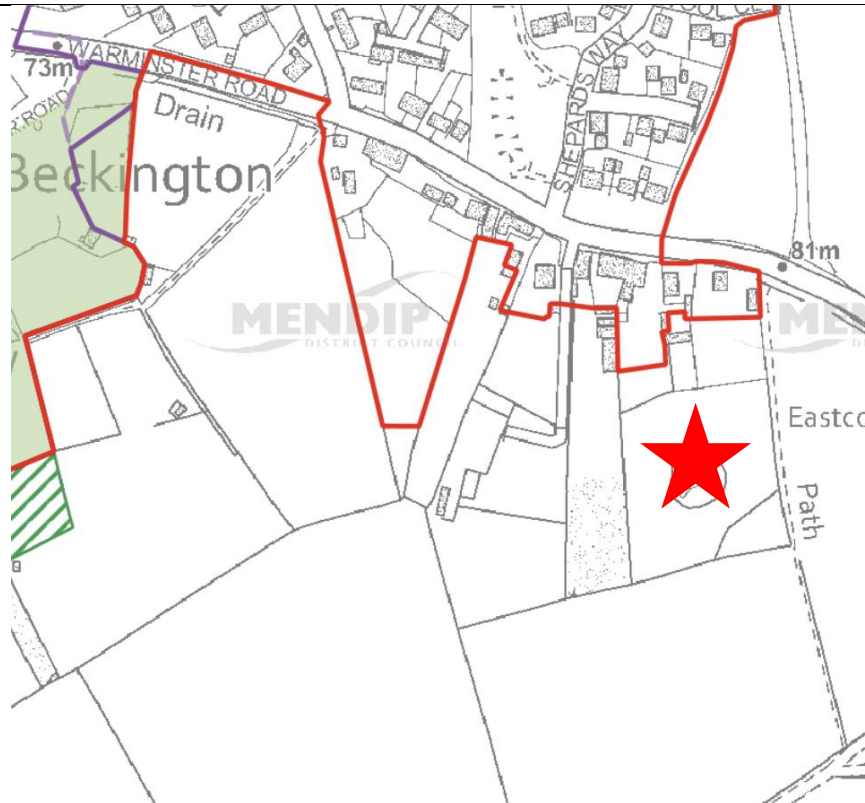
Planning Policy Considerations

Settlement boundary



The site (location marked with a red star/s throughout the following assessment) falls outside the defined development boundary. The development boundary adjoins the site along its northern boundary – denoted by the red line in the above mapping extract.

Conservation Area



The site lies outside of the Beckington Conservation Area – the boundary of conservation area is shown by the purple line in the mapping extract above.

Other landscape Designation (please state)	The site lies within National Character Area 117 – Avon Vales and local Landscape Character Assessment (2020) Area B3: Lower Frome Valley Spring Gardens, Beckington to Farleigh Hungerford. Key physical/natural characteristics are defined as: Main river valley; Modest scale river and flood plain landscape; Areas of gently rolling plateau; and Limited woodland cover.
Nature Conservation Designation	Bat Consultation Zone Mells Valley SAC – Band B. Vallis Vale (SSSI) Impact Risk Zone.
Listed Buildings within site	Access to the land to the rear (the site) is through No.24 a Grade II listed building: NO 24 AND ADJACENT GARDEN WALL Heritage Category: Listed Building Grade: II List Entry Number: 1058187 Historic mapping:



Revised 1970 – Published 1971



Surveyed 1960 – Published 1960



Surveyed 1922 – Published 1926

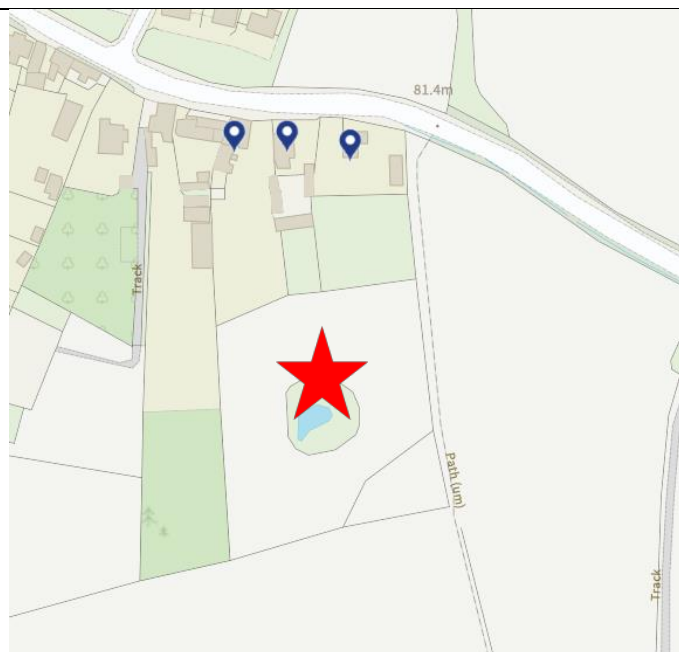


Surveyed 1902 -Published 1904



Surveyed 1884 – Published 1884

**Listed
Buildings
adjacent to
site**

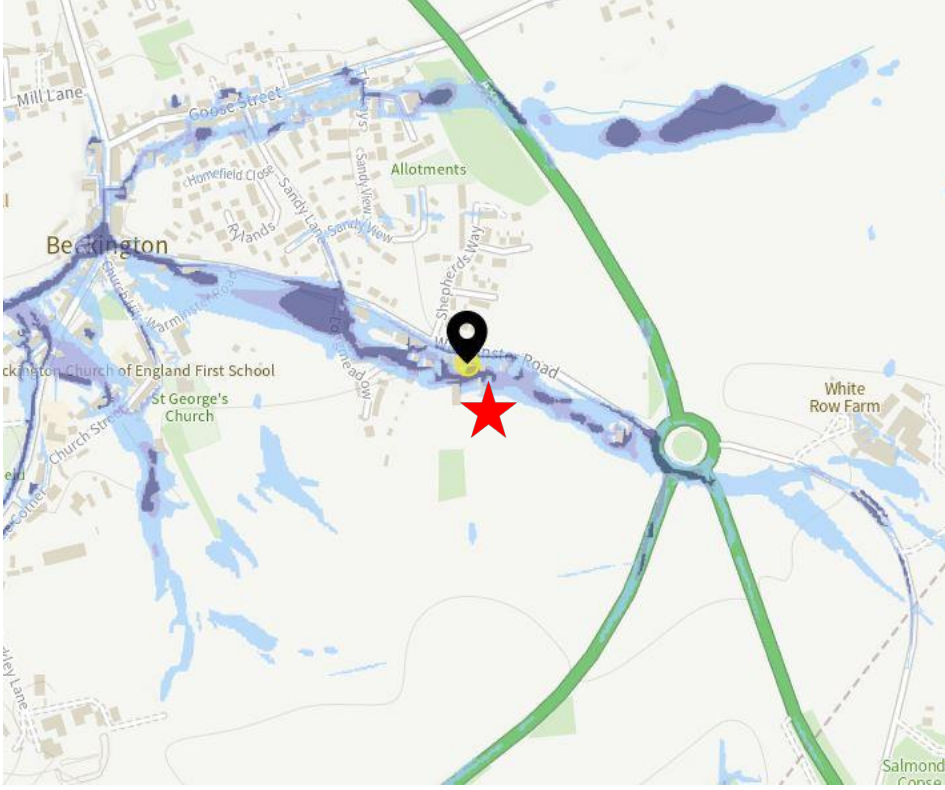


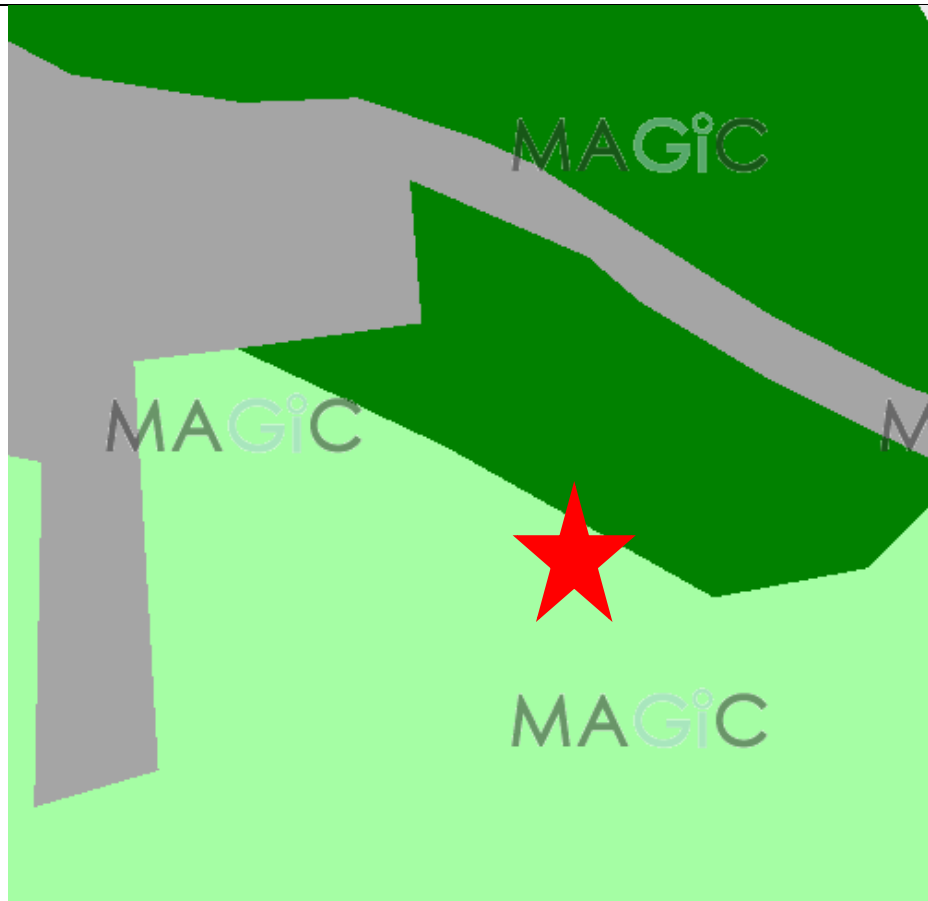
Shown right to left on above mapping extract:

NO 24 AND ADJACENT GARDEN WALL

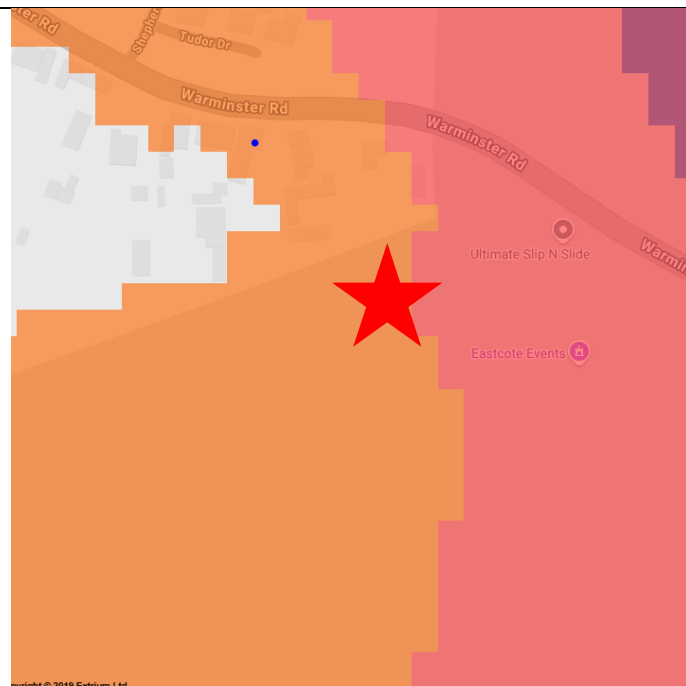
Heritage Category: **Listed Building**

	Grade: II List Entry Number: 1058187 26, WARMINSTER ROAD Heritage Category: Listed Building Grade: II List Entry Number: 1173934 SOMERLEA, FORECOURT WALL AND GATE PIERS Heritage Category: Listed Building Grade: II List Entry Number: 1366316
Tree Preservation Order	None shown on Mendip interactive mapping.
Flood Zone	 A shown in mapping extract above, the site is located in Flood Zone 1 which has the lowest probability of flooding.

Surface Water Flooding	 Mid to high flood risk from surface water at the site entrance.
Public Rights of Way	None
Planning History	None
Other designations affecting site (local plan)	N/A
Agricultural Grade	

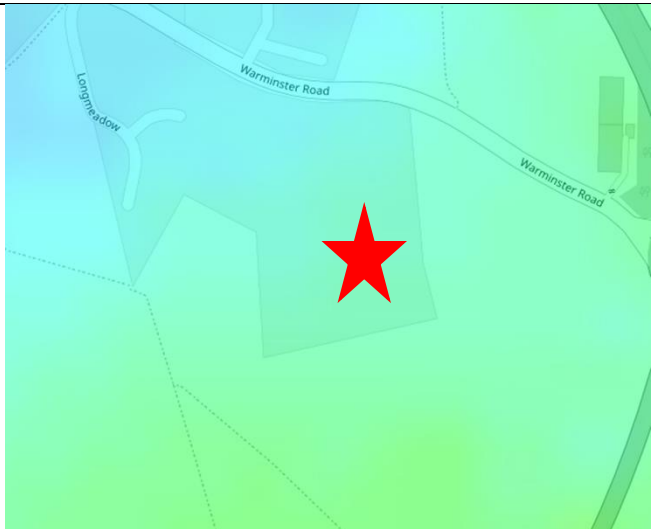


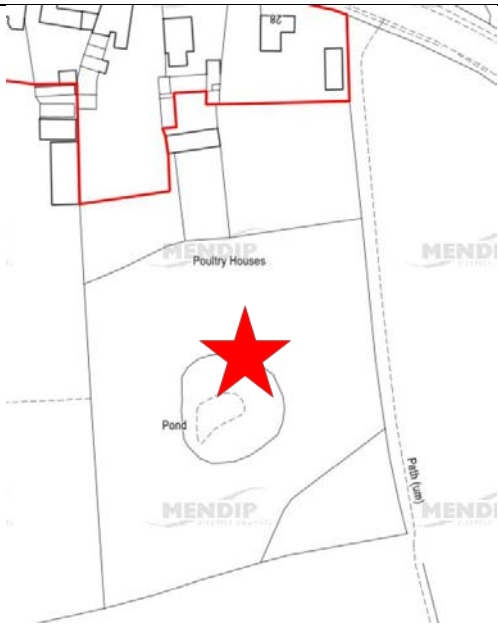
The site lies largely within agricultural land classification 3b as shown in above mapping extract – dark green denotes Grade 3a and light green Grade 3b.



The site lies within an area shown to be affected by road noise from the nearby A36. Within this area road noise is considered to be a material planning consideration where assessment and mitigation may be required if necessary and/or appropriate.

Site Appraisal

Access to Site	Served via an existing residential point of access off the Warminster Road between No.s 24 and 26 – see image in 'Views into Site' section below.
Topography	 The site land relief is relatively flat.
Views into the site	
Views out of the site	Open countryside (agricultural land) to the south. Existing residential development to the north. Former pastureland immediately to the east understood to be used for outside recreational activities and A36 beyond.
Vegetation	No access to the site – desktop assessment only. From Google satellite mapping a number of mature trees and/or large shrubs appear to be within the site area. The value of these is unknown. This existing planting which runs along the site

	boundaries to the east, south and west appears to screen and contain the site within the landscape.
Hydrological features	 A pond is shown in geophysical mapping on site in a central location. The value of this in terms of biodiversity is unknown.
Other on-site features	None evident (desktop assessment only).
Signs of contamination?	None evident.
Current use of site	Formerly agricultural land (historically nursery). Now appears to be disused and overgrown.
Any known previous use?	As above.
Utilities on site?	Unknown. Reasonably assume due to the proximity of the site to the settlement and Warminster Road utilities are accessible where available.
Character of Area	Undulating plateau (character area).
Neighbouring Land Uses	Residential to the north and west (Longmeadow). Outdoor activity land to the east with main A36 highway beyond. Open countryside to the south.
Design Layout Issues	Following a noise assessment (A36) which will inform the evolution of the design, the layout may need to mitigate against noise. Following a heritage assessment which will inform the evolution of any design approach, the layout

	may need to account for the setting of the listed building. As a minimum, I would anticipate a buffer or transition zone to be required.
Height and character of surrounding buildings	Predominantly 2-storey.

Availability

Ownership	
Owner supportive of development?	Yes
Time frame in which site could be developed	1-5 years

Development Potential

Is the site considered appropriate for development?	No
Can the entire site be developed?	Unknown
Potential Development Residential	
Any known developer interest?	Unknown
Local Opinion (questionnaire responses)	N/a

Suitability

Which category does this site fall into? Please give reasons for your choice (what are the problems if any) 1. Inappropriate 2. Significant constraints 3. Minor constraints 4. Unconstrained

Assessment conclusions

Site Available	Yes
Site Suitable	No
Site Achievable	No
Conclusion The site is constrained by heritage, access, surface water flooding and road noise. From a purely landscape perspective the site appears discreetly located and congruent with the pattern of development within the immediate vicinity (Longmeadow). The north easternmost part of the settlement is the less sensitive in landscape terms in my opinion. The site was historically nursery land assumed to be associated with No.24 Warminster Road. To understand the impact of the development on the setting of the listed buildings and in particular No. 24 a heritage assessment is required and then onward consultation with the LPA conservation team. Regardless of the technical ability of this point of access to be 'safe and suitable' the intensification would cause an unacceptable level of harm to existing residential amenities currently enjoyed at No.24 and 26 given the width of the driveway and proximity of these buildings. Further assessment relating to surface water is required to establish if a suitable access can be achieved. It would appear not from relevant mapping currently. If an assessment is requested this should be reviewed and considered by the LPA drainage team and LLFA. In addition, given the known drainage capacity issues both of the LPA and LLFA should be consulted should this site be progressed in the NDP process. Again, further assessment of road noise is required. This is less onerous in my opinion given the site is slightly removed and not immediately adjacent. In addition, the site appears relatively discreet in terms of location with the wider landscape context where typical mitigation measures such as acoustic fencing would be less prominent and therefore minimise its visual impact. For the above reasons, I recommend this site is not taken forward in the BNDP process.	

Mendip District Council

You are here: [Home](#) > [Planning Policy](#) > [Maps](#) > [Adopted Local Plan](#)

Map Legend

Click element to toggle visibility

All Layers On | All Layers Off

Development Limits

- Development Limit - CP1
- LPTI Limited Update - Development Limit Changes 2024

Development Constraints

- Open Space of Local Significance - DP2
- Scheduled Monuments (SAM) - DP3
- Areas of High Archaeological Potential (AHAP) - DP3
- Conservation Area - DP3
- Registered Parks and Gardens - DP3
- Special Landscape Feature - DP4
- Regionally Important Geological Site (RIGS) - DP4
- Area of Outstanding Natural Beauty (AONB) - DP4
- Green Belt DP26, DP4
- Special Area of Conservation (SAC)/ Special Protection Area (SPA)/ Ramsar site - DP5

Scale 1: 11339

500 m

© Crown Copyright and Database Right 2024. All rights reserved.

Beckington Neighbourhood Development Plan – Call for future Housing Sites*This communication is sent by post and email*

BPA Reference 1002_02

11 October 2024

Dear Landowner

As you will be aware the Parish Council and steering group are producing a Neighbourhood Development Plan (the 'Plan') for the Parish of Beckington and as part of that process, independent planning consultants Brodie Planning Associates (BPA) are providing guidance on a 'Call for Sites'.

Earlier in the year a Residents Survey was conducted asking a range of questions including whether the community would like the Plan to support more housing in the Parish. The responses were split "with just over a third of respondents supporting more development versus just under half against any further development. The views of the *not sure* could tip the balance either way¹". In

¹ Beckington Neighbourhood Plan: Resident Survey Results: Housing Issues: Question 15

consideration of housing as part of the Plan process, the purpose of this Call for Sites is to identify land for future housing development.

As part of the Call for Sites process all parcels of land recently submitted to the emerging Mendip area Local Plan Part II – Sites and Policies will be assessed. In addition, we are publicising the Call for Sites and writing to landowners with land adjacent to the existing form of the settlement, regardless of whether sites have been previously promoted to ensure that landowners are aware of the process and that we have the most up to date information.

Please can you respond to the following questions to assist us in this process.

If you have more than one parcel of land that you would like considered, please complete the following questions for each parcel of land separately.

1. Please can you identify and confirm the extent of any land you would like to be assessed for potential development. i.e. provide boundaries on a map. If you do not wish to have your site considered for development, please confirm that is the case and you need not answer any more questions.
2. Please demonstrate on the map where you would expect access to be achieved.

3. Please indicate when land would be available for development in the table below:

Availability	<i>Please tick one box</i>
Available immediately	
Available in 1-5 years	
Available in 6-10 years	
Available in 10-15 years	

Please return this information to me (address and email details herein) by Friday 29th November 2024 at the latest to allow the site assessments to be completed with the most up to date information. Should you wish to provide any additional information for example suggested housing numbers or an indicative layout for your land this will also be review as part of the assessment but is not essential and will not affect the assessment.

Lastly, we are required by the General Data Protection Regulations (GDPR) 2018 to secure consent to hold personal data. Our company is committed to protecting your privacy. Personal information is defined as information about you that is personally identifiable such as your title, name, address, email address and phone

number. We shall only hold personal data necessary for the Beckington Neighbourhood Development Plan process. Your personal data will not be shared or sold to other third-parties. Should you submit land into this Call for Sites this will act as consent to us holding your personal data for the sole purpose of the Beckington Neighbourhood Development Plan, as outlined above.

Should you have any further questions please contact myself in the first instance.

Yours sincerely



Wendy Hopkins, MRTPI

Director | Brodie Planning Associates